

Always check our website for the most updated specifications: www.americh.com



waste & overflow.

Tub pictured with optional

CODES AND COMPLIANCE

• Underwriters Laboratories (UL)

• ANSI Z124.1 • ANSI A112-19.7

• ANSI A112.19.8 • ASTM F462-79

• Underwriters Laboratories - Canada (cUL)

• Canadian Standards Association - (CSA)

Contact Americh for additional approvals.

Americh products meet or exceed the following standards:

36 20 21




All bathtub dimensions are $\pm 1/2$ ".

DIMENSIONS

47" x 47" x 20" deep (1194 x 1194 x 508 mm) Whirlpool Operating Gallons = 60 (Liters = 227) Gallons to Overflow = 96 (Liters = 363)

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

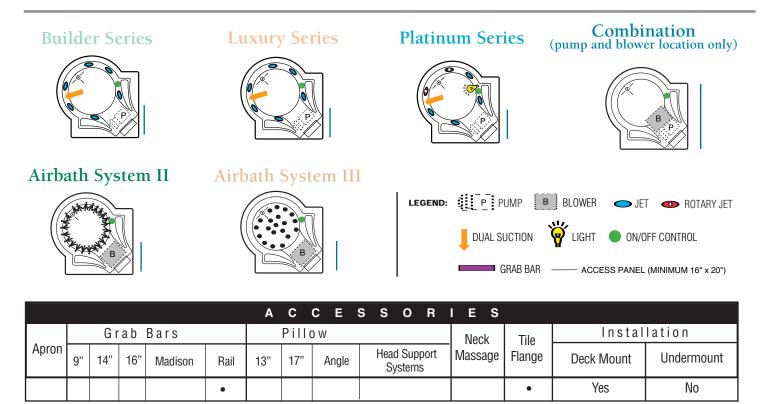

= option is available •

= standard Grab Bar on Platinum Series

= option is not available

INSTALLATION TIPS

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 2 1/2" higher than stated.
- All whirlpool or AirbathTM unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.
- For oval or specialty shapes. Americh recommends you wait until you have the actual unit or contact us for a template.

