




Always check our website for the most updated specifications: www.americh.com









Tub pictured with optional grab bar and waste & overflow.

All bathtub dimensions are $\pm 1/2$ ".

CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories Canada (cUL)
- Canadian Standards Association (CSA)
- ANSI Z124.1 ANSI A112-19.7
- ANSI A112.19.8 ASTM F462-79

Contact Americh for additional approvals.


DIMENSIONS

72" x 48" x 19" deep (1829 x 1219 x 483 mm) Whirlpool Operating Gallons = 75 (Liters = 285) Gallons to Overflow = (Liters =)

ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

= option is not available

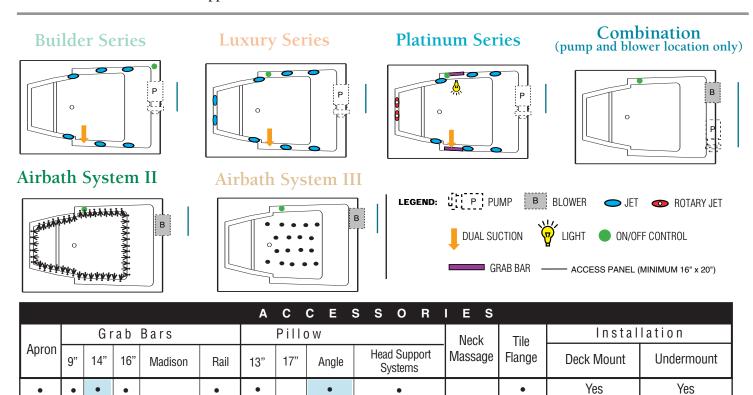

INSTALLATION TIPS

- Install product according to our Owners manual and local codes.
- All units with an Airbath III may be 1 1/2 2 1/2" higher than stated.
- All whirlpool or AirbathTM unit requires an access panel.

• | = option is available

• Hot water supply should be 65-75% of tub capacity or greater. Always consult your local plumber for recommendations as installations will vary.

= standard on Platinum Series

- When ordering for undermount installation, always advise Americh to assure there are no issues with deck mounted controls.
- Cut-out dimension: 70" x 46"