

Hand shower set with individual rosettes FlowReduce

27 803 845




- three settings: normal flow, soft flow, massage flow
- with anti-scale system
- 3/8" shower outlet
- rosette for wall elbow 60 x 78mm
- rosette for shower holder 60 x 78mm
- metal shower hose 1250mm with integrated antitwist protection
 • 1/2" wall elbow
- max. flow 6.8 l/min

Codes & standards

- This product reduces water consumption by % (compared to requirements of EPAct '92)
 This product can contribute to Water Use
- Reduction in LEED® Green Building Rating
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB, WELL Intrinsic protection against back flow.

Intrinsic protection against back flow.



Required miscellaneous


35 080 970-90 Concealed adapter






Hand shower set with individual rosettes FlowReduce

27 803 845



Flow rate chart



Codes & Standards


ASME	
A112.18.1/CSA	
B125.1	

California Energy Commission (CEC)



Hand shower set with individual rosettes FlowReduce

27 803 845

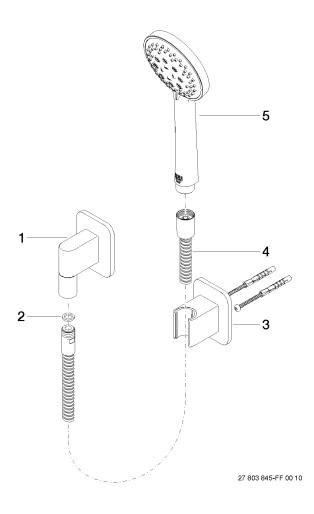

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	28 450 845-00	Wall elbow	1	10
2	09 14 20 026 90	seal	1	2
3	28 050 845-00	Wall bracket	1	10
4	90 30 02 072 00-00	Metal shower hose 1/2" x 3/8" x 1250 mm	1	10
5	28 014 979-00 0010	Hand shower	1	-