


Rain shower for recessed ceiling installation 300 mm

28 033 970



- rain shower Ø 300 mm
- Rain flow, max. flow rate 6,8 l/min
- Spray flow, max. flow rate 6,8 l/min
- with anti-scale system
- min. recess depth 137,5 mm
- This product reduces water consumption by % (compared to requirements of EPA '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- Not suitable for use in a steam bath

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.


Three-way diverter trim is sold separately

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

	Chrome	28 033 970-00 0010
	Brushed Platinum	28 033 970-06 0010
	Platinum	28 033 970-08 0010
	Matte White	28 033 970-10 0010
	Brushed Durabrass (23kt Gold)	28 033 970-28 0010
	Matte Black	28 033 970-33 0010
	Brushed Champagne (22kt Gold)	28 033 970-46 0010
	Champagne (22kt Gold)	28 033 970-47 0010
	Brushed Chrome	28 033 970-93 0010
	Brushed Dark Platinum	28 033 970-99 0010

Required miscellaneous




Concealed ceiling installation box for recessed ceiling installation 35 033 970-90 0010
 •recess depth 137mm


Rain shower for recessed ceiling installation 300 mm

28 033 970

mm [inches]

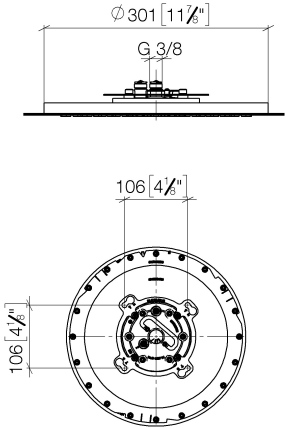

Flow rate chart

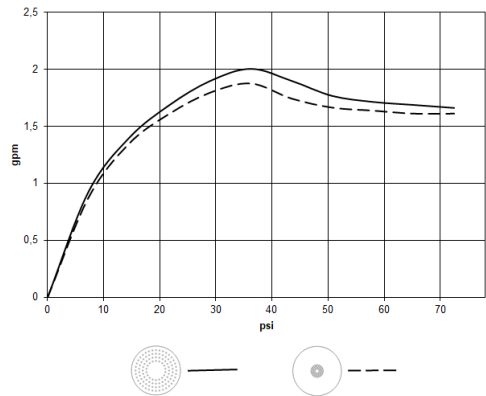

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 262 00 90	flange	1	2
2	90 24 03 309 02 90	connection	1	2