

Rain shower for surface-mounted ceiling installation with light 300 x 240 mm

28 042 980



- rain shower 300 x 240mm
- Rain flow, max. flow rate 6,8 l/min
- Spray flow, max. flow rate 6,8 l/min
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- This product reduces water consumption by % (compared to requirements of EPAAct '92)
- This product can contribute to Water Use Reduction in LEED® Green Building Rating
- Not suitable for use in a steam bath

Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously. Three-way diverter trim is sold separately

includes light bulbs with a Class F energy efficiency


Three-way diverter ensures that the product does not exceed the max. flow rate of 2.5 gpm at any setting. It does not permit the use of two functions simultaneously.

Three-way diverter trim is sold separately

includes light bulbs with a Class F energy efficiency

	Chrome	28 042 980-00 0010
	Brushed Platinum	28 042 980-06 0010
	Platinum	28 042 980-08 0010
	Matte White	28 042 980-10 0010
	Brushed Durabrass (23kt Gold)	28 042 980-28 0010
	Matte Black	28 042 980-33 0010
	Brushed Champagne (22kt Gold)	28 042 980-46 0010
	Champagne (22kt Gold)	28 042 980-47 0010
	Brushed Chrome	28 042 980-93 0010
	Brushed Dark Platinum	28 042 980-99 0010

Required miscellaneous




Concealed ceiling installation box for surface-mounted ceiling installation with light 35 042 970-90 0010


- min. recess depth 90 mm
- max. recess depth 115 mm
- Provided by customer: Light switch

Rain shower for surface-mounted ceiling installation with light 300 x 240 mm

28 042 980

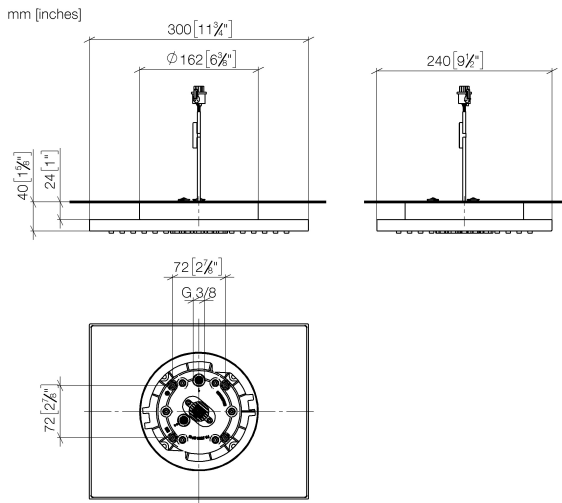

Flow rate chart

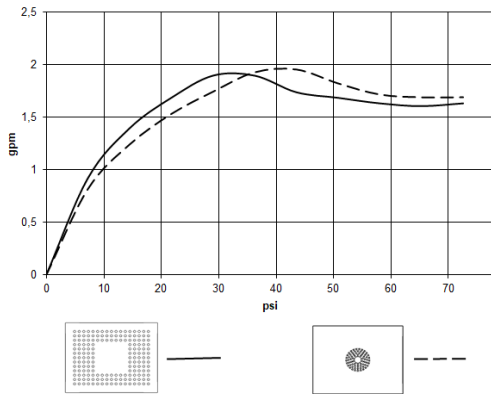

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	30
2	90 24 03 309 02 90	connection	2	2
3	90 10 01 225 00 90	electronic accessories	1	2