


Concealed wall-mounted single-lever mixer

35 860 970



- red brass, lead-free
- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 1x female thread 1/2" outlet for wall spout
- 1x female thread 1/2" outlet
- 2x dust cover
- anti-water packing
- soundproofing
- gauge 100 mm

Codes & standards

Rough can be rotated to position the lever on top or to the left of the spout.

Recommended miscellaneous

	Extension 20 mm	12 869 970 90
	•Not for combination with exposed trim parts 36 86X 664-FF0010	

Recommended miscellaneous

	Extension 20 mm	12 870 970 90
	•Can only be combined with exposed trim parts 36 86X 664-FF.	


Recommended miscellaneous

	Adapter for reversed water connections	12 880 970 90
	•Not suitable for combining with META PURE (36 86X 664-FF).	


Concealed wall-mounted single-lever mixer

35 860 970

mm [inches]

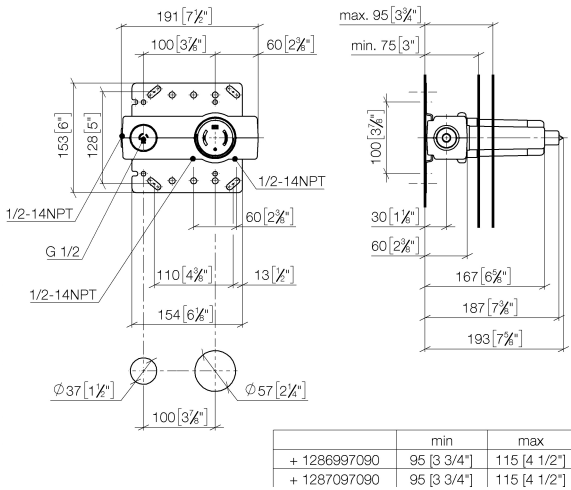

Flow rate chart

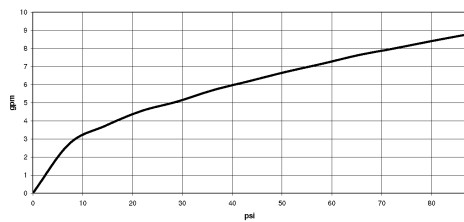


Codes & Standards

ASME
A112.18.1/CSA
B125.1

Concealed wall-mounted single-lever mixer

35 860 970

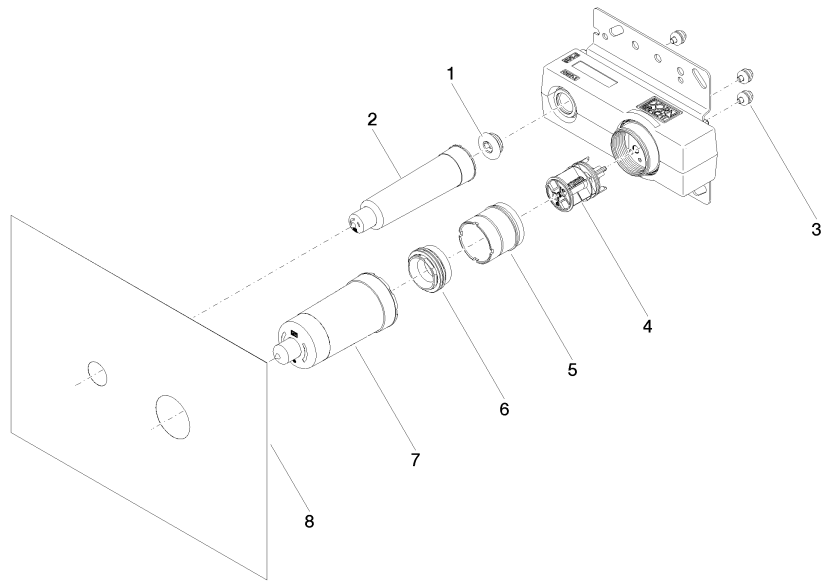

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	04 31 20 006 00 90	plug	1	2
2	09 21 02 173 90	cap	1	2
3	90 23 01 091 00 90	set	3	2
4	90 31 20 107 00 90	plug	1	2
5	90 17 01 238 00 90	sleeve	1	2
6	90 24 04 349 00 90	threaded connector	1	2
7	09 21 02 176 90	cap	1	60
8	04 14 03 074 00 90	gasket kit	1	60