

# WYATT<sup>®</sup> ONE-PIECE ELONGATED TOILET





### D22005C101.415

### FEATURES

- Vitreous china
- Elongated bowl design
- Right Height®
- 2" fully-glazed concealed trapway
- High efficiency 1.28 gpf/4.8 Lpf
- Siphon action jetted bowl 1,000 MaP
- PowerWash<sup>®</sup> rim scrubs bowl with each flush
- EverClean<sup>®</sup> surface inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface
- 3" flush valve with chemical resistant flapper
- 12" (305 mm) rough-in
- 16-1/2" (419 mm) rim height for accessible applications
- Includes design matched polypropylene slow-close seat

#### DIMENSIONS

#### **NOMINAL DIMENSIONS** 29-3/4" x 15-3/8" x 30-3/4" (756 x 390 x 782 mm)

#### WATER SPOT

8-1/4" (210 mm) wide 9-1/4" (235 mm) length 5-1/2" (140 mm) distance to rim

#### COLORS/FINISHES

Canvas White (415)

#### **COMPONENTS**


5024A15G.415Transitional Elongated Luxury Seat735194-400.415Tank Cover7381331-200-XXX0APlated Trip Levers (optional component)<br/>Satin Nickel (295)<br/>Brushed Nickel (144)

#### COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASME A112.19.2/CSA B45.1

EPA WaterSense® Certified

CEC and CALGreen<sup>®</sup> Compliant






Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for Accessible and Usable Building Facilities-Check Local Codes

ROUGH IN DIAGRAM SHOWN ON NEXT PAGE



# WYATT<sup>®</sup> ONE-PIECE ELONGATED TOILET

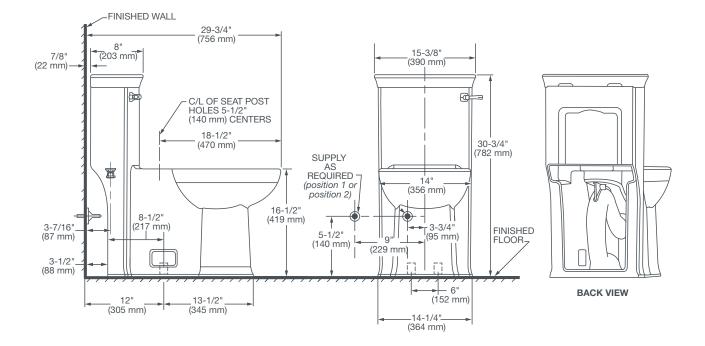

#### NOTES:

This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately. Dimensions shown for location of supply is suggested.

#### **IMPORTANT:**

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

## PART OF LIXIL

© 2020 AS America Inc.