



## BLUSH™

### PRODUCT DESCRIPTION

Elevate the beauty experience with our Blush™ lighted makeup mirror. Designed with a soft halo of natural LED light, smooth tilt adjustment, and 5X magnification, it offers the perfect blend of style and precision for flawless makeup application.

### SPECIFICATION STATEMENT

Solution shall consist of a round lighted makeup mirror with forward-facing task lighting and corrosion-resistant glass. Mirror shall have 5X magnification over a normal reflection with an adjustable viewing angle. Mirror perimeter shall be backlit using energy-efficient LED lighting technology with a 90+ CRI (Color Rendering Index). Product will have a 1-year limited warranty.


### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### FEATURES AND BENEFITS

- Corrosion-resistant mirror glass
- Forward-facing task lighting for ideal makeup application and grooming
- 5X magnification
- Up-and-down tilt
- Side-to-side swivel
- Wall-mounted (hardwired)
- Suitable for damp bathroom environments
- Energy efficient
- Easy installation
- 1-year limited warranty
- Designed in USA

### FINISH OPTIONS




### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Superior color rendering: 90+ CRI
- Color temperature (CCT): 3,000K

### SAFETY SPECIFICATIONS

- Entire assembly meets UL/cUL standards

DIMENSIONAL DRAWINGS (Not to scale.)

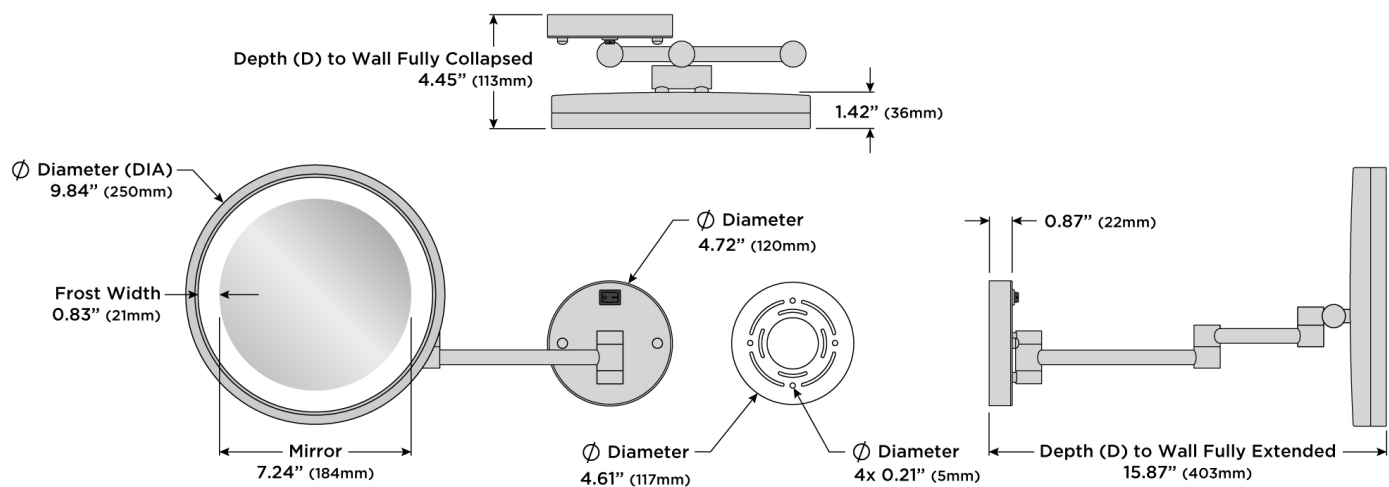

STANDARD MODELS

Model Number <sup>1</sup>	Finish	Model Type	Dimensions <sup>2</sup>	Power Requirements <sup>3</sup>
MM-BLU-WM-BK05	Matte Black (BK-05)	Wall-mounted (hardwired)	9.84" DIA x 4.45"—15.87" D (250mm DIA x 51mm—403mm D)	120 or 240VAC, 6W
MM-BLU-WM-BR02	Brushed Brass (BR-02)			
MM-BLU-WM-SS01	Polished Stainless Steel (SS-01)			
MM-BLU-WM-SS02	Brushed Stainless Steel (SS-02)			

INSTALLATION SPECIFICATIONS (for Standard Models)

- 120 or 240VAC hardwire electrical connection
- Requires a standard 3.5" or 4" octagonal electrical box
- Controlled by on/off switch on fixture
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.  
<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).  
<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.