


G-8178H-2C1L-T
M-Series Valve Horizontal Trim with Three Handles

GRAFF®

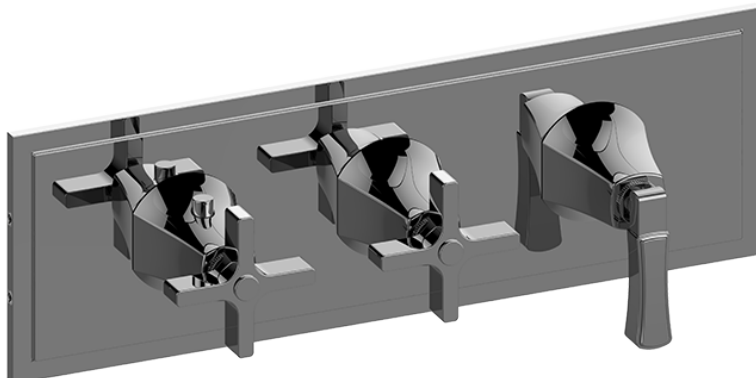

Product Features

- Three metal handles
- Decorative trim plate
- 2C1L handles should not be used with 3-outlet diverter valves
- To complete package, you must order G-8006 Rough Valve + 2 other Rough Valves

Code compliance

- ADA

Available Finishes



Technical drawing of the G-8056 door handle assembly, showing front and side views with dimensions.

Front View Dimensions:

- Overall width: 14-7/16" (366mm)
- Distance between handle centers: 3-1/4" (83mm) and 3-15/16" (100mm)
- Overall height: 4-3/4" (120mm)
- Distance from top edge to handle center: 3-15/16" (100mm)
- Distance from bottom edge to handle center: 3-15/16" (100mm)
- Distance from left edge to handle center: 3-1/4" (83mm)
- Distance from right edge to handle center: 2-9/16" (64mm)

Side View Dimensions:

- Overall height: 4-5/16" (110mm)
- Distance from top edge to handle center: 3-3/8" (85mm)
- Distance from bottom edge to handle center: 3-3/16" (80mm)
- Distance from left edge to handle center: 2-11/16" (68mm)
- Distance from right edge to handle center: 2-11/16" (68mm)

Labels:

- Rough - G-8006
- Rough - G-8076 or G-8052 or G-8053
- M4
- M40 x 1.5
- Wall max. (110mm)
- Wall min. (65mm)

CUTTING EDGE DESIGN