


CAYONO

- one-seater bath with waste at foot end
- modern rectangular bathtub with spacious interior of the tub
- the bottom of the bath is extremely flat allowing for very comfortable showering
- made of Kaldewei steel enamel 3,5 mm

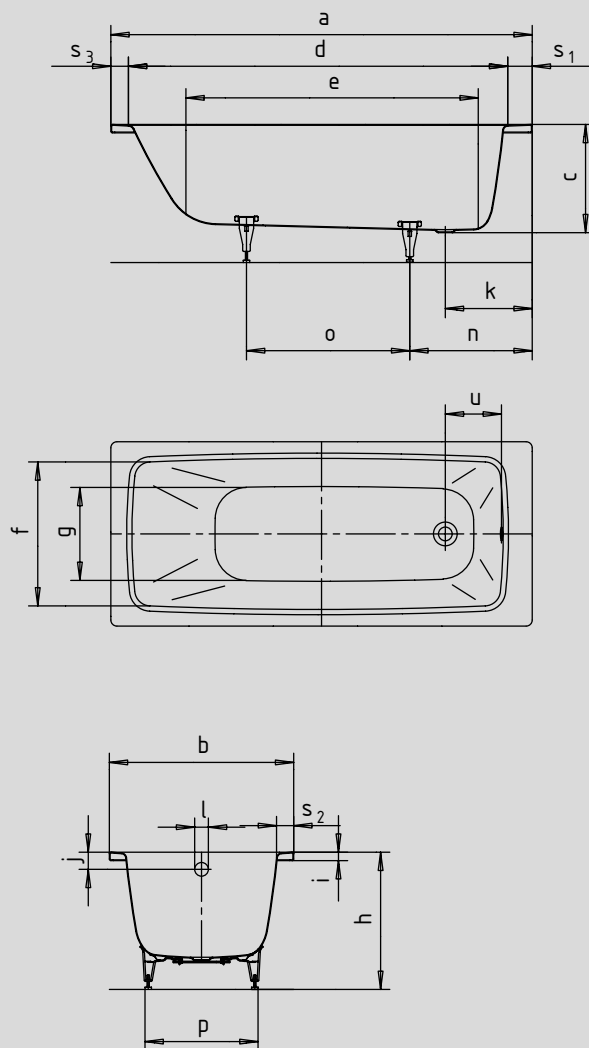

		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
Model No.		747	747	748	748	749	749	750	750	751	751
External length	a	59.06	1500	62.99	1600	66.93	1700	66.93	1700	70.87	1800
External width	b	27.56	700	27.56	700	27.56	700	29.53	750	31.50	800
Depth	c	16.14	410	16.14	410	16.14	410	16.14	410	16.14	410
Internal length (top)	d	51.57	1310	55.51	1410	59.45	1510	59.45	1510	63.39	1610
Internal length (bottom)	e	39.76	1010	43.70	1110	47.64	1210	47.64	1210	51.57	1310
Internal width (top)	f	22.44	570	22.44	570	22.44	570	24.02	610	25.98	660
Internal width (bottom)	g	15.75	400	15.75	400	15.75	400	17.72	450	20.08	510
Height with feet	h	21.06-21.85	535-555	21.38-22.17	543-563	21.14-22.01	537-559	21.18-21.77	538-553	20.79-21.38	528-543
Height of rim	i	1.26	32	1.26	32	1.26	32	1.26	32	1.26	32
Distance top edge to centre of overflow hole	j	2.56	65	2.56	65	2.56	65	2.56	65	2.56	65
Distance tub edge to centre of drain hole	k	12.99	330	12.99	330	12.99	330	12.99	330	12.99	330
Diameter of overflow hole	l	2.05	52	2.05	52	2.05	52	2.05	52	2.05	52
Diameter of drain hole	m	2.05	52	2.05	52	2.05	52	2.05	52	2.05	52
Distance foot end of tub edge to centre of foot	n	17.72	450	17.72	450	17.91	455	17.72	450	17.72	450
Distance between the feet	o	22.05	560	25.79	655	29.21	742	29.33	745	32.28	820
Max. width of feet	p	17.13	435	16.03	430	17.32	440	18.70	475	22.05	560
Width of rim (foot end; lengthwise)	s ₁ ; s ₂ ; s ₃	4.33; 2.48; 3.15	110; 63; 80	4.33; 2.48; 3.15	110; 63; 80	4.33; 2.48; 3.15	110; 63; 80	4.33; 2.48; 3.15	110; 63; 80	4.33; 2.48; 3.15	110; 63; 80
Distance between centre holes	u	8.39	213	8.39	213	8.39	213	8.39	213	8.39	213
Water volume** in gallons		23.51		28.26		29.06		35.93		45.17	
Weight of the enamelled bath tub in lbs		92.59		99.21		110.23		110.23		123.46	

Subject to technical alterations and tolerances.
 ** 18.49 gallons displacement on average.

KALDEWEI