

## FEATURES

- Solid metal construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/- 3 degrees Fahrenheit
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Complements the Klyne collection

## CODES/STANDARDS APPLICABLE



Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- ADA\*
- OBC\*
- CSA B651\*

**ADA** **CSA B651** **OBC**

\* Compliant when installed to the specific requirement of this regulation

## P26010

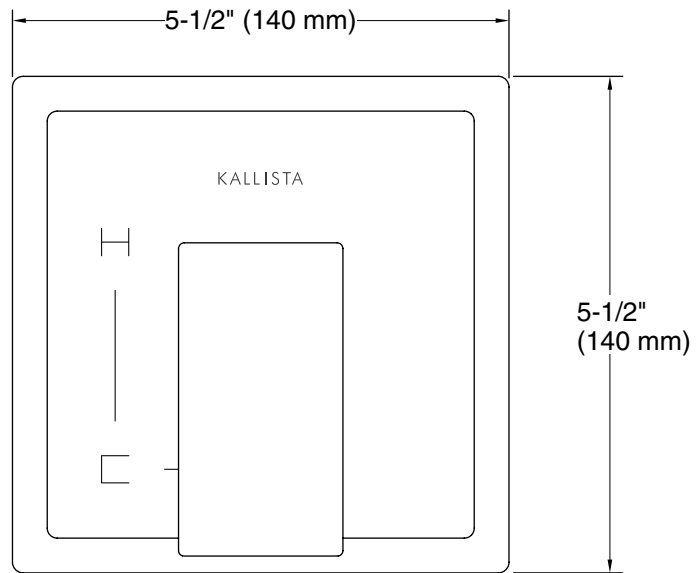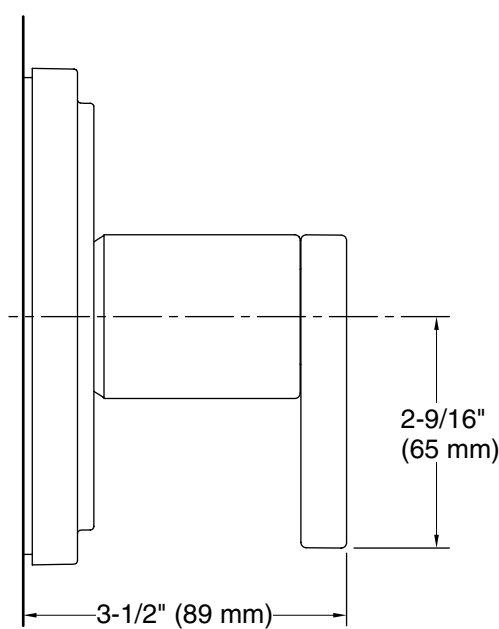

SPECIFIED MODEL				
Model	Description	Finishes		
P26010-LV	Klyne Pressure Balance Valve Trim	<input type="checkbox"/> CP Polished Chrome	<input type="checkbox"/> AD Nickel Silver	<input type="checkbox"/> BL Matte Black
Required Rough-in				
P19310-00	Pressure Balance Rough-in	<input type="checkbox"/> NA		
P19310-US	Pressure Balance Valve, with stops - PEX inlet	<input type="checkbox"/> NA		
P19310-WS	Pressure Balance Rough-in with Stops	<input type="checkbox"/> NA		

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.