

Features

- High-quality solid-brass construction for durability and reliability
- Easy-to-clean sprayface resists mineral buildup
- 1.75 gpm (6.6 lpm) maximum flow rate
- Sprayhead pivots 25 degrees
- Features an internal volume control for complete shut-off
- Unlacquered Brass (ULB) available in North America and the United Kingdom only



Recommended Products/Accessories

- P21501-00 Showerhead with Arm
- P21664-00 Modern Slidebar
- P24814-00 Wall-Mount Bath Spout

Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
IAPMO Certification

KALLISTA® Five-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	AD	Nickel Silver
	CP	Polished Chrome
	GN	Gunmetal
	BN	Brushed Nickel
	BAF	Brushed French Gold
	SN	Polished Nickel
	AF	French Gold

KALLISTA.

Foundations
Body Spray
P22078-H

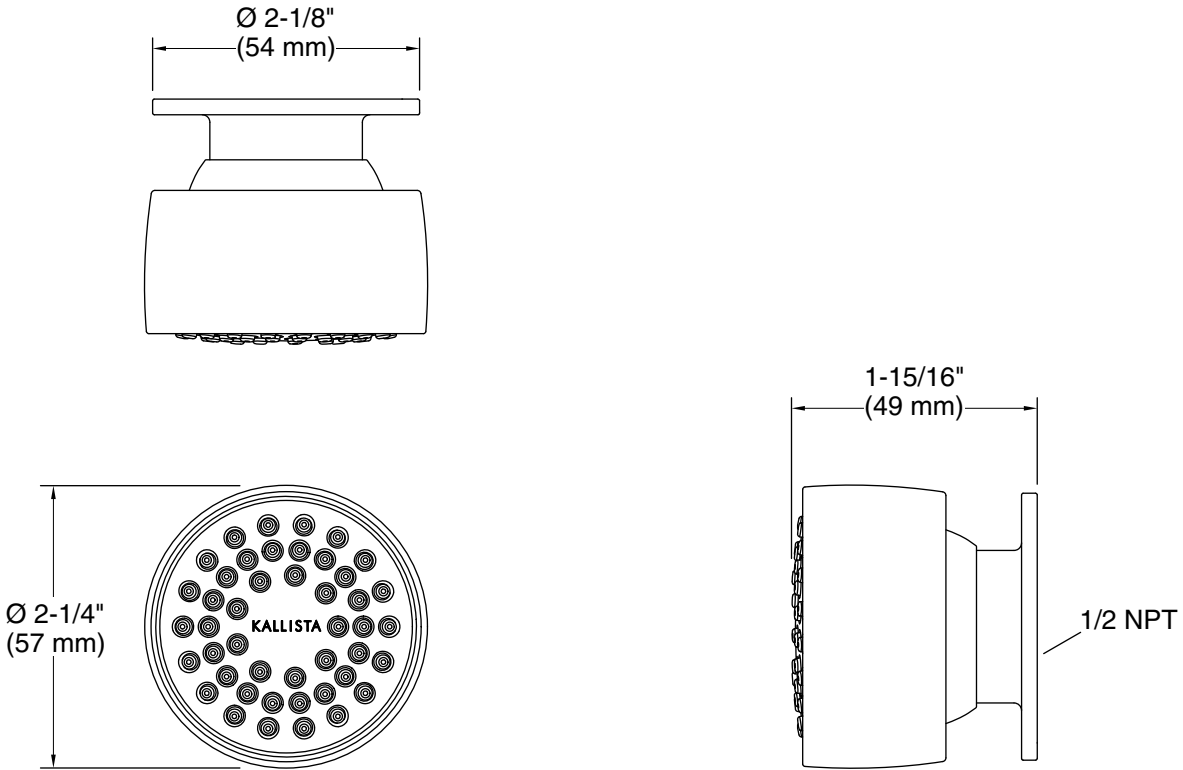

Technical Information

All product dimensions are nominal.

Drain included: No

Drain with
overflow: No