


# KALLISTA®

## Vir Stil® by Laura Kirar Single control single hole bar faucet P80268-00

### Features

- High-quality solid-brass construction for durability and reliability
- Spout reach is 5-9/16" (141 mm)
- 1.5 gpm (5.7 lpm) maximum flow rate
- Single-hole installation

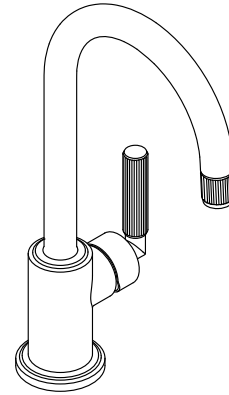

**ADA** **CSA B651**

### Codes/Standards




ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 61  
NSF/ANSI/CAN 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
IAPMO Certification

### KALLISTA® Five-Year Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	SN	Polished Nickel
	VS	Stainless

1-888-4-KALLISTA (1-888-452-5547)


Kallista reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kallista.com](http://www.kallista.com).

6-23-2024 21:19 - US

# KALLISTA

## Vir Stil® by Laura Kirar Single control single hole bar faucet P80268-00

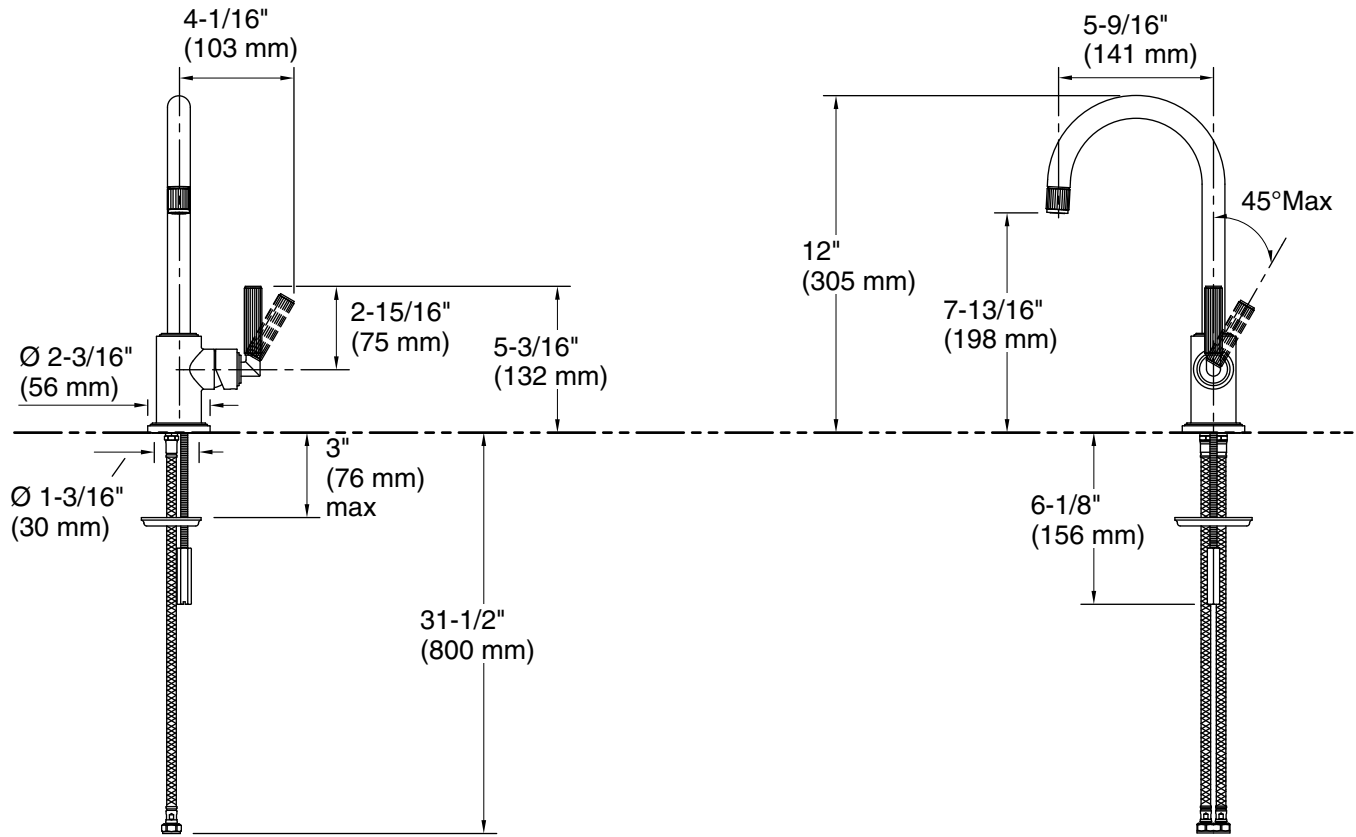

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: No

#### Spout:

Spout reach: 5-9/16" (141 mm)

### Pressure/fixture Supply Requirements

Fixture pressure max (static): 125 psi (861.8 kPa)

Fixture pressure min (static): 20 psi (137.9 kPa)

### Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.