



# Composed® | K-103C36-SATA

Touchless single-hole lavatory faucet with Kinesis® sensor technology, 0.35 gpm

## Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- 0.35 gpm (1.3 lpm) maximum flow rate with vandal-resistant outlet
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Box includes: Spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware
- Requires battery, plug-in AC power, or Hybrid Energy System (each sold separately)



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 6:35 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Technical Information

All product dimensions are nominal.

### Spout

Spout Reach: 5-13/16" (147 mm)

### Flow Rate

Faucet Flow Rate: 0.35 gpm (1.3 l/min)

## Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

## Required Products/Accessories

- K-13480 AC single supply, global outlets
- or
- K-13480-A AC single supply, North American outlets
- or
- K-13481 Multi-outlet power supply, global outlets
- or
- K-13481-A Multi-outlet power supply, North American outlets
- or
- 1359812 Dc Power Unit
- or
- 1377524 Powercell Assembly

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

120/240 V, 50/60 Hz

## Electrical Component Ratings


Power Cord Length: 60" (1524 mm)

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



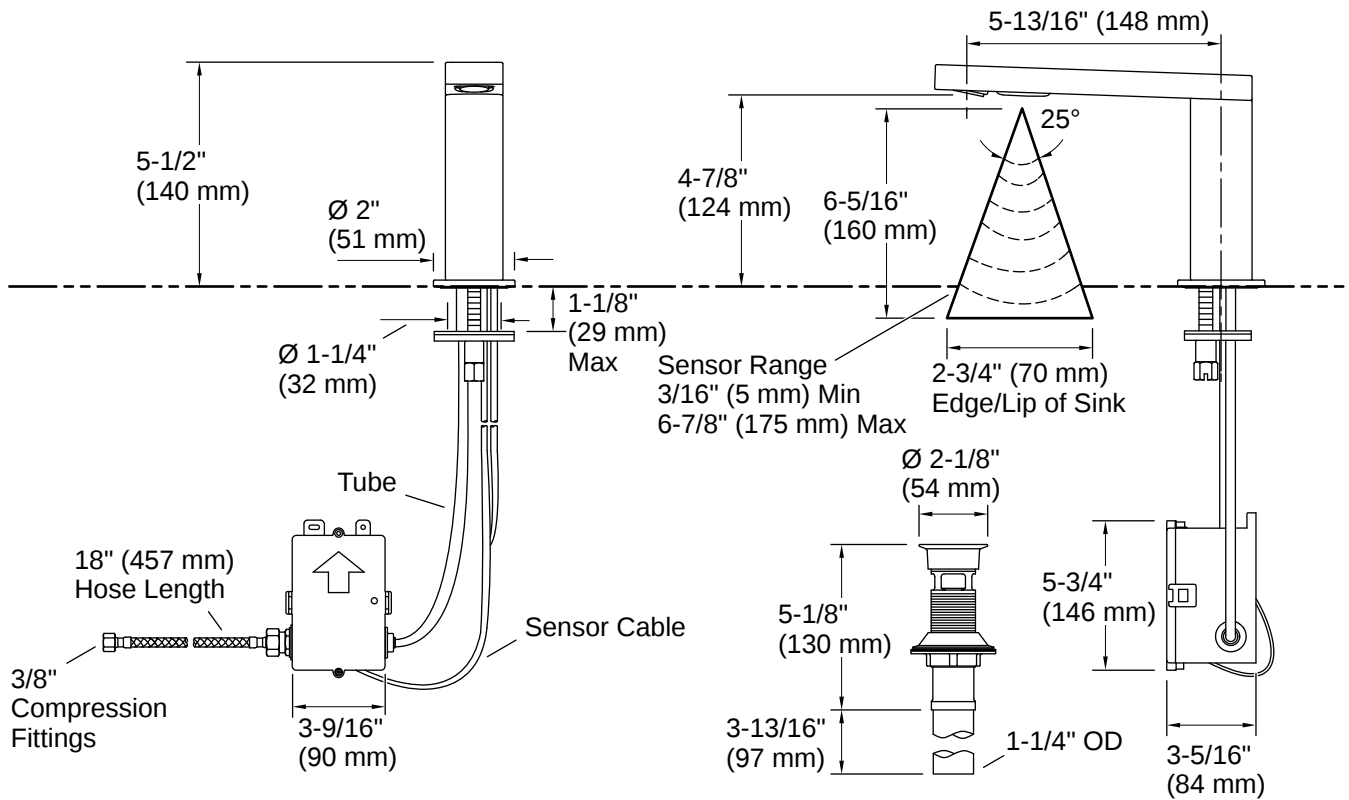

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

