



Components® | K-103M36-SAHL

Touchless single-hole lavatory faucet with Kinesis® sensor technology, 1.5 gpm

Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 1.5 gpm (5.7 lpm) maximum flow rate
- Requires battery, plug-in AC power, or Hybrid Energy System (each sold separately)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant laminar outlet
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Box includes: Spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)



Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 2:43 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
 NSF/ANSI/CAN 372
 NSF/ANSI/CAN 61
 DOE - Energy Policy Act 1992
 ADA
 ICC/ANSI A117.1
 CSA B651
 OBC

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 6-5/8" (168 mm)

Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

Valves

Included Valve: Thermostatic Mixer

Material

- Brass construction spout

Required Products/Accessories

- K-13481 Multi-outlet power supply, global outlets
- or
- K-13481-A Multi-outlet power supply, North American outlets
- or
- K-13480-A AC single supply, North American outlets
- or
- K-13480 AC single supply, global outlets
- or
- 1359812 Dc Power Unit
- or
- 1377524 Powercell Assembly

Technology

- Kinesis® sensor technology offers on-demand detection for maximum water savings

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).


110/220 V, 50 Hz

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



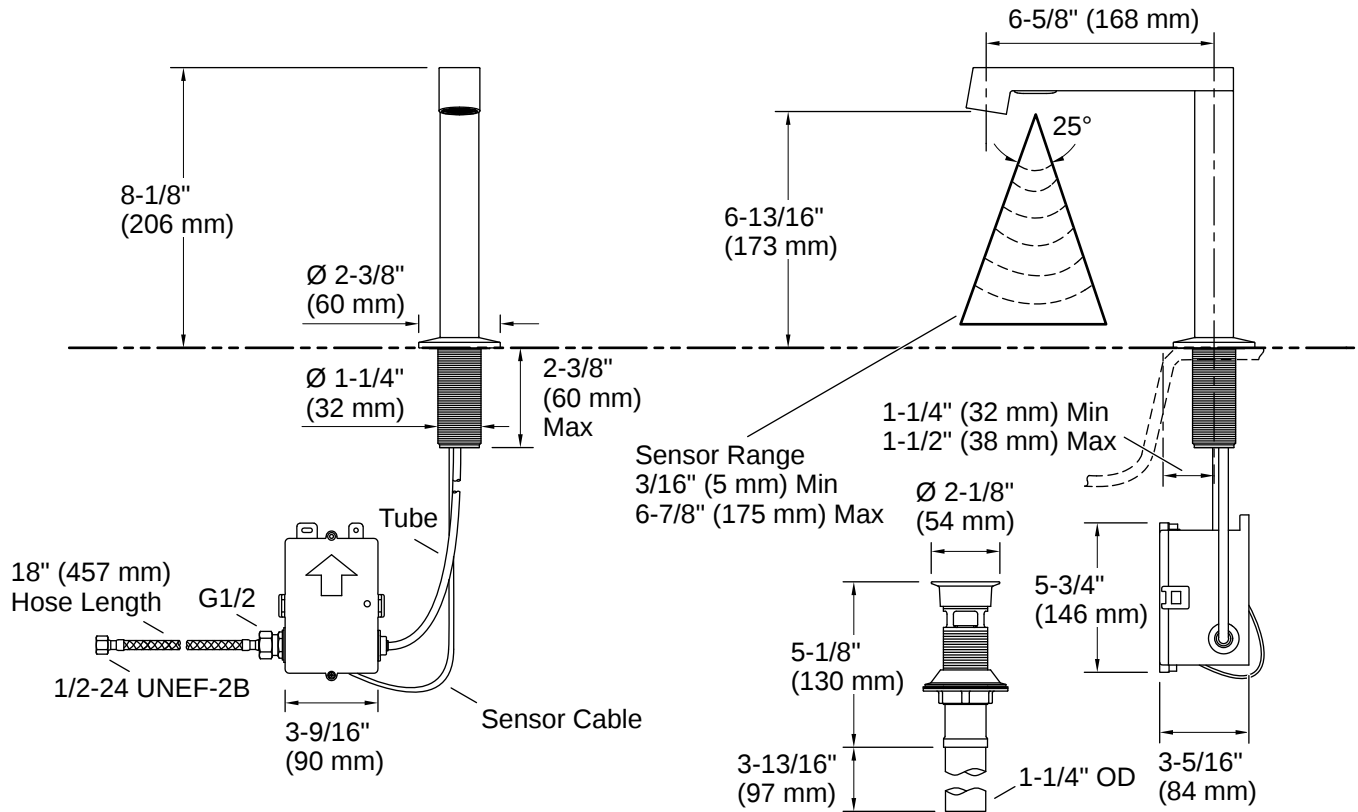

Installation

- Single-hole mounting

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

