

## Components® | K-103M36-SANL

Touchless single-hole lavatory faucet with Kinesis® sensor technology, AC-powered, 0.5 gpm

### Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Requires single or multiple AC adapter unit (sold separately)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant laminar outlet
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Box includes: Spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

■ CP Polished Chrome



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

110/220 V, 50 Hz

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

## Technical Information

All product dimensions are nominal.

### Spout

Spout Reach: 6-5/8" (168 mm)

### Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

## Valves

Included Valve: Thermostatic Mixer


## Material

- Brass construction spout

## Technology

- Kinesis® sensor technology offers on-demand detection for maximum water savings



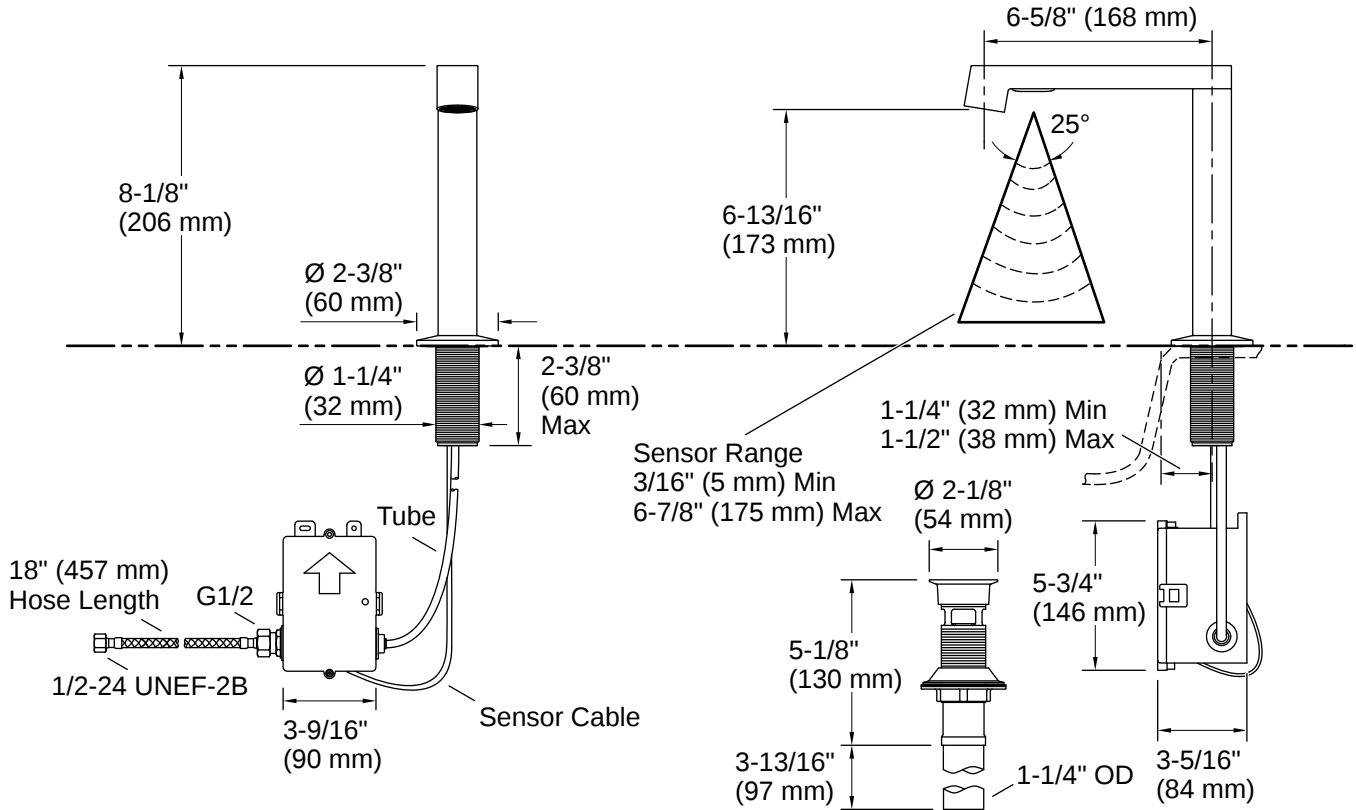

## Installation

- Single-hole mounting

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

