



# Underscore<sup>®</sup> | K-1121-W1

60" x 30" drop-in bath with Bask<sup>®</sup> heated surface

## Features

- Bask<sup>®</sup> heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Customize the heat with three adjustable settings
- Integral lumbar support
- Slotted overflow allows for deep soaking



## Available Colors/Finishes

*Color tiles intended for reference only.*

- 0 White
- 96 Biscuit
- 95 Ice Grey
- 7 Black Black



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 3:13 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ADA compliant when installed to the specific requirements of these regulations.



CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
ADA  
ICC/ANSI A117.1  
cUL Listed  
UL Listed

## Technical Information

All product dimensions are nominal.

|                        |   |
|------------------------|---|
| Drain Location:        | Reversible                                    |
| Drain Hole Diameter:   | 2-1/4" (57 mm)                                |
| Minimum Flat for Door: | 2" (51 mm)                                    |
| Basin Area, Bottom:    | 42-3/8" x 20" (1076 mm x 508 mm)              |
| Basin Area, Top:       | 54-3/8" x 24-5/16" (1381 mm x 618 mm)         |
| Water Depth:           | 15-1/16" (383 mm)                             |
| Water Capacity:        | 59.8 gal (226.4 L)                            |
| Minimum Floor Load:    | 50 lbs/ft <sup>2</sup>                        |
| Weight:                | 77 lbs (34.9 kg)                              |
| Cutout:                | Drop-in, 59-1/2" x 28-1/2" (1511 mm x 724 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

- K-531 Undermount kit for select 60" Underscore bath models
- K-1491 Bath/whirlpool pillow, removable
- K-1601 Bath/whirlpool footstop, removable
- K-1177 Tiling-in bead, 144" length
- K-23726 Drain treatment
- K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Heated Surface: 120 V, 15 A

## Electrical Component Ratings

Heated Surface: 120 V, 0.5 A, 60 Hz


## Warranty

See website for detailed warranty information.

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



No change in measurement if connected with drain illustrated. (K-7272)

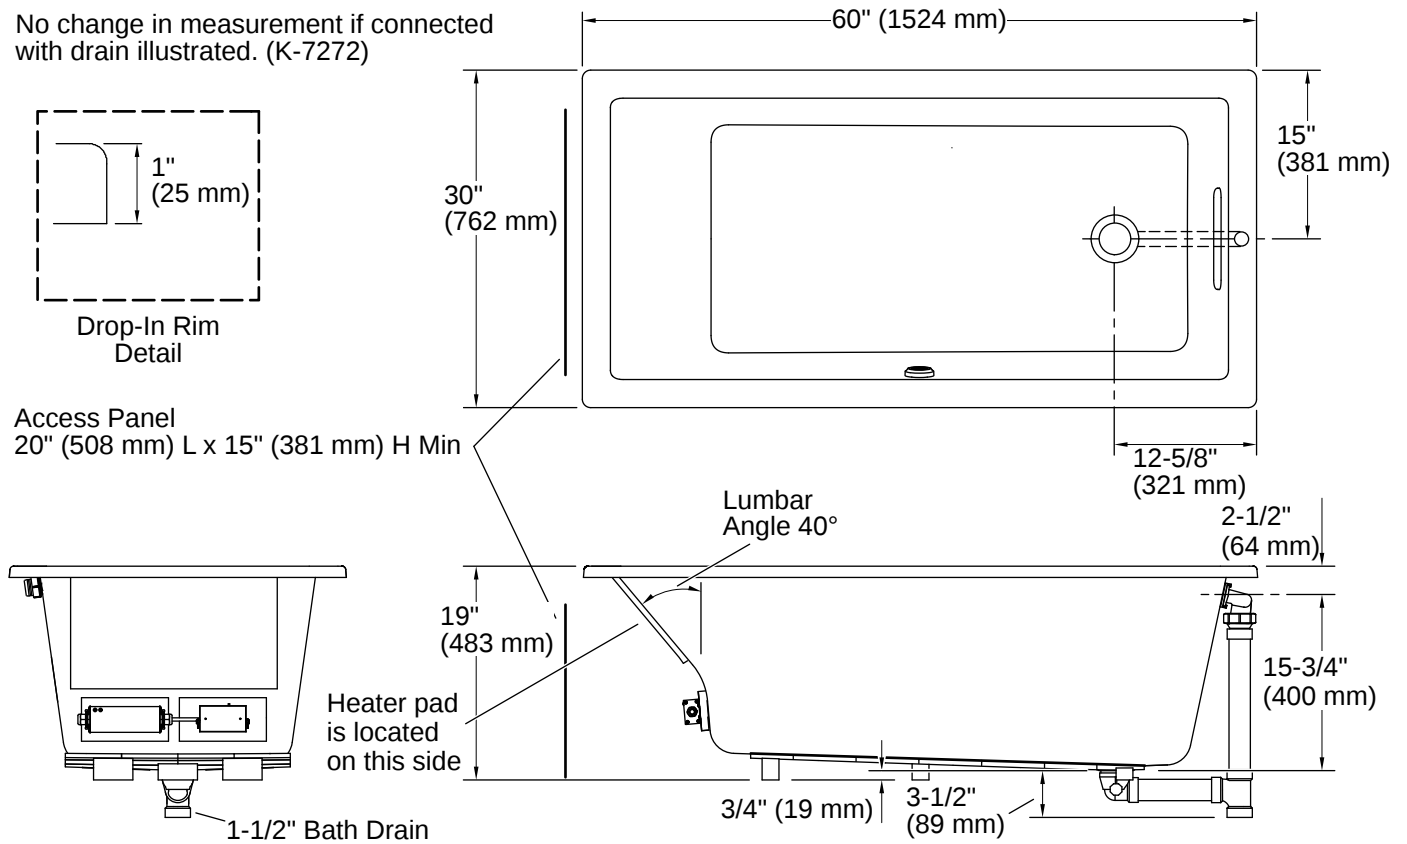

## Installation

- Reversible drain
- Drop-in or undermount
- Requires 110 V electrical service
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

ADA compliant when installed to the specific requirements of these regulations.

