



# Oblo™ | K-126B16-SANA

Wall-mount touchless faucet with Kinesis® sensor technology, Hybrid-powered

## Features

- Kinesis® technology with concealed sensor allows for a clean aesthetic and provides extraordinarily accurate and reliable actuation in varying installation environments
- Below-counter valving reduces the faucet footprint and provides easier service
- Design-forward aesthetic for commercial bathroom spaces
- 0.5 gpm (1.9 lpm) maximum flow rate
- Powered by Kohler's Hybrid Energy System (HES), which provides maintenance-free power for up to 30 years (approx. 875,000 cycles)
- On-demand usage with 30-second max. continual run cycle to prevent vandalism and save water
- Vandal-resistant aerator
- 18" (457 mm) stainless steel braided flexible supply hose for easy installation
- Concealed mechanical mixer sold separately
- Complies with the Safe Drinking Water Act (SDWA)
- Box includes: Spout assembly, grid drain, control box assembly, supply hose, and standard mounting hardware



## Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Technical Information

All product dimensions are nominal.

### Spout

Spout Reach: 8-9/16" (217 mm)

### Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

## Valves

Included Valves: Thermostatic Mixer, Volume Control

## Material

- Brass spout
- Cast brass valve

## Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

## Technology


- Kinesis® sensor technology offers on-demand detection for maximum water savings

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



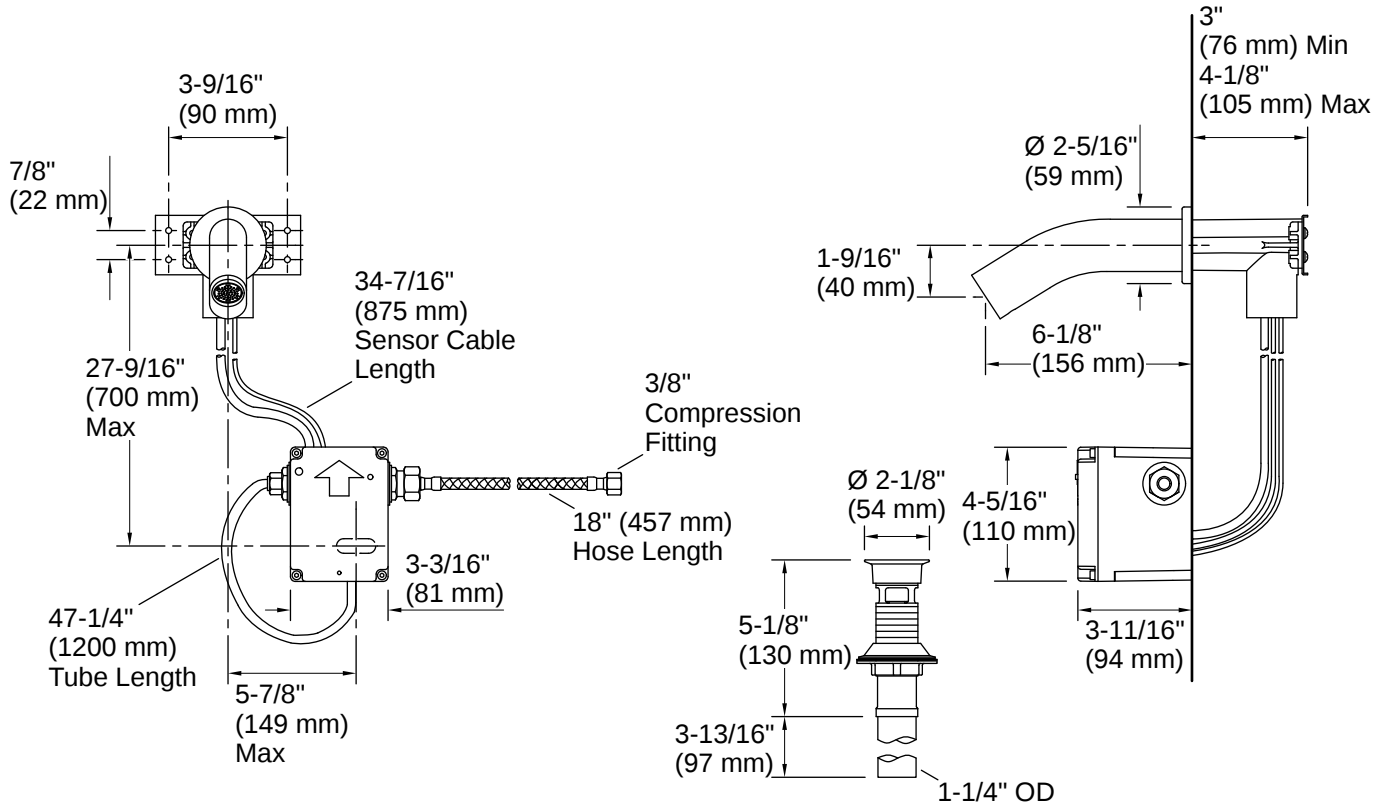

## Installation

- Wall-mount
- Includes one hybrid cell

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

