



Gooseneck | K-13472-SATA

Touchless single-hole lavatory faucet with Insight™ sensor technology and temperature mixer, DC-powered, less drain, 0.35 gpm

Features

- 0.35 gpm (1.3 lpm) maximum flow rate at 60 psi (4.14 bar)
- Factory-set 30-second maximum continual run cycle
- Vandal-resistant aerator
- 24" (610 mm) flexible supply hose for easy installation
- Less drain
- Includes two AAA batteries



Sustainability



Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Spout

Spout Reach: 6-3/16" (157 mm)

Flow Rate

Faucet Flow Rate: 0.35 gpm (1.3 l/min)

Valves

Included Valves: UltraGlide, Thermostatic Mixer

Material

- Brass
-

Technology


- Electronic Insight™ sensor technology for accurate and consistent activation
-

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



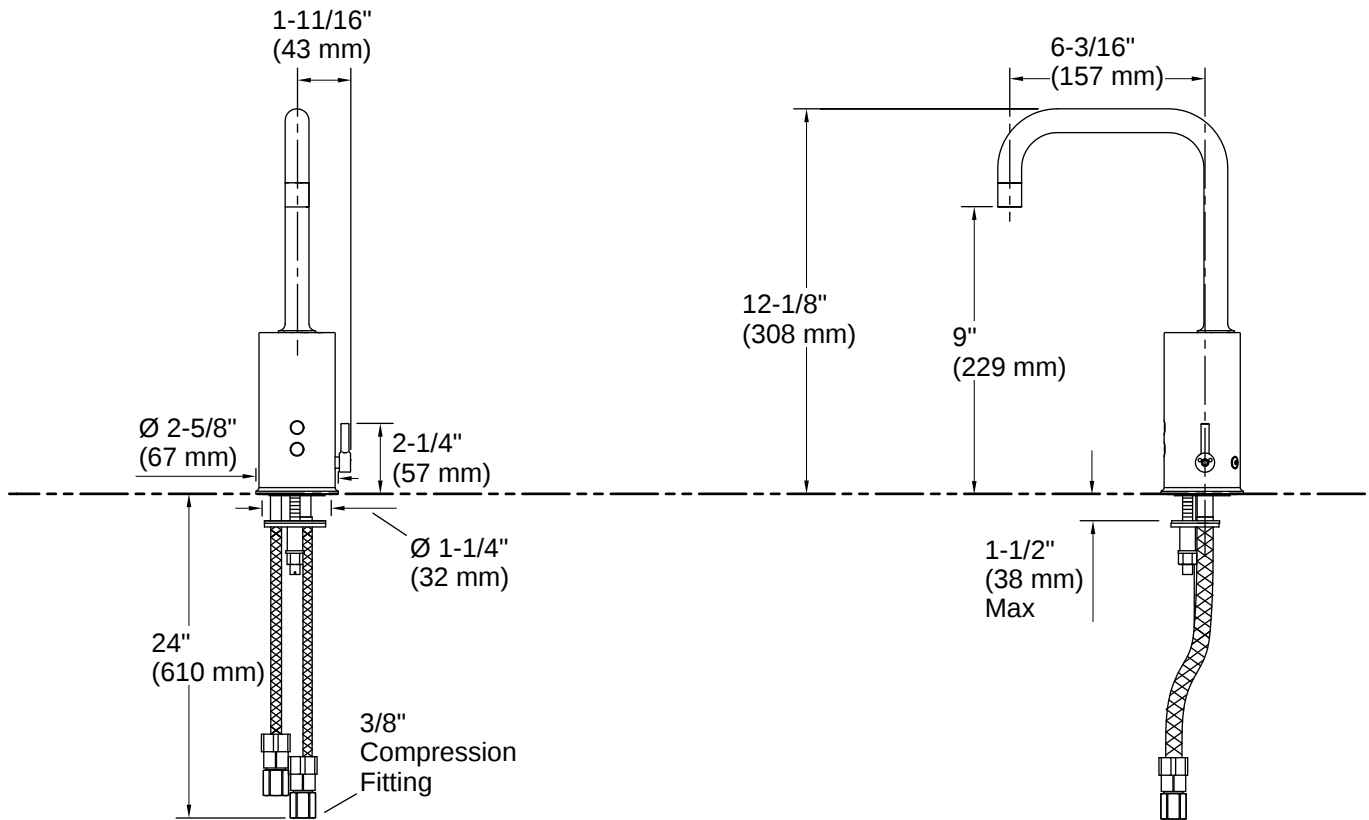

Installation

- Single-hole mounting
- Above-counter battery and valve for easy installation and maintenance

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

