



## Veil® | K-1381-TBH

One-piece elongated toilet with skirted trapway, dual-flush

### Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design
- Elongated bowl offers added room and comfort
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf)
- Left-hand Polished Chrome trip lever
- Additional trip lever finishes available
- 2-1/8" (54 mm) glazed trapway
- Skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming
- Designed to support easier transfers from wheelchair



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- |    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-05-2026 01:01 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

*ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.*

*Accessibility standards may require controls to be located on the open side of the toilet.*

*Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.*



ASME A112.19.2/CSA B45.1

ASME A112.19.14

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Recommended Products/Accessories

K-39525-L Left-hand trip lever

## Warranty

*See website for detailed warranty information.*

KOHLER® Toilets and Seats Limited Warranty

## Technical Information

|                       |                      |
|-----------------------|----------------------|
| Rough-in:             | Standard 12" (305mm) |
| Flush Type:           | Class Five           |
| Flush Rate:           | 1.28 gpf (4.5 lpf)   |
| Bowl Shape:           | Elongated            |
| Waste Outlet:         | Floor                |
| Trapway Size:         | 2-1/8" (54 mm)       |
| Trapway Type:         | Skirted              |
| Rim to Water Surface: | 5-9/16" (141 mm)     |

## Pressure/Fixture Supply Requirements

|                           |                    |
|---------------------------|--------------------|
| Minimum Flowing Pressure: | 15 psi (103.4 kPa) |
| Minimum Flow Rate:        | 1 gpm (3.8 l/min)  |




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-05-2026 01:01 - US-CA

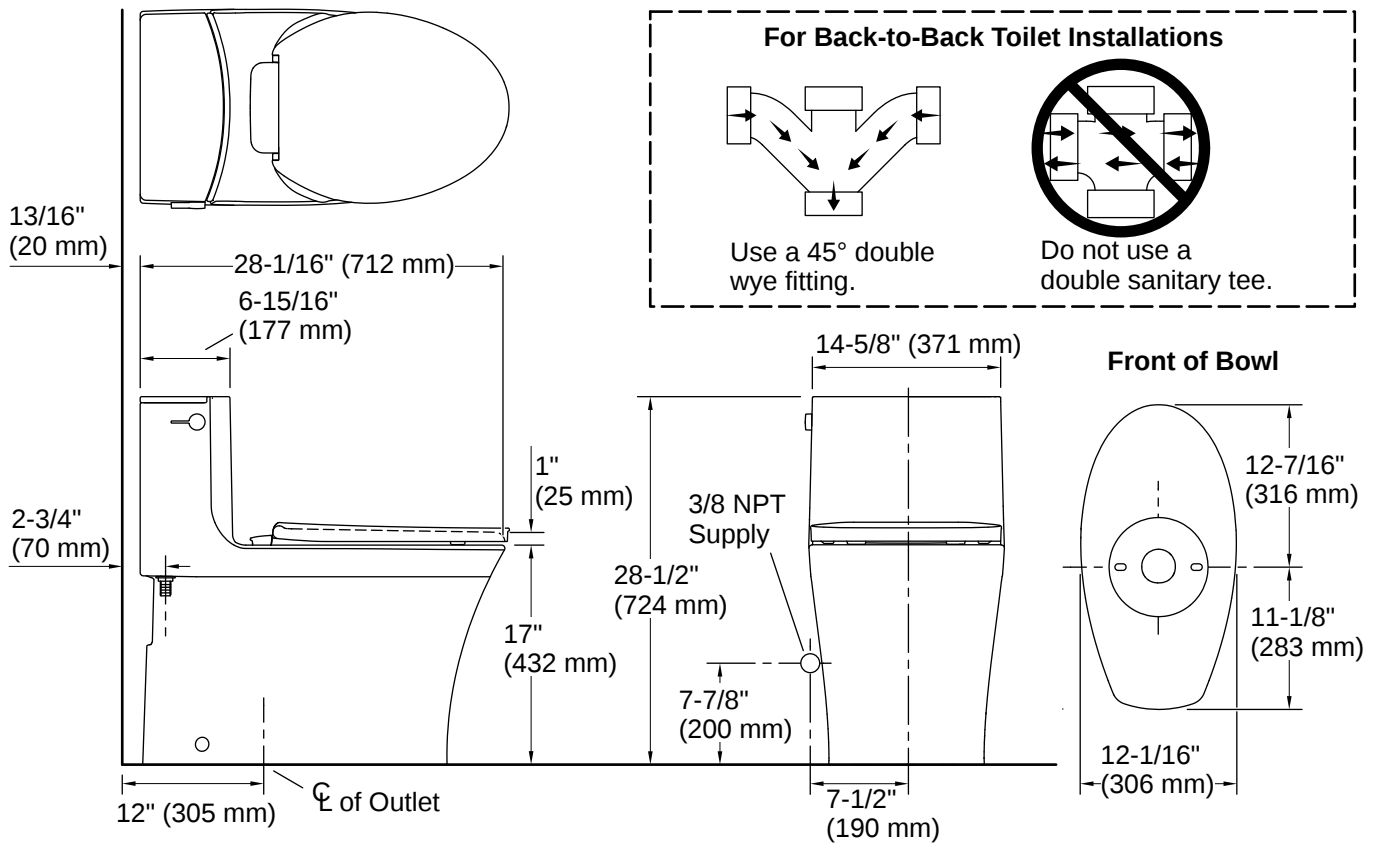

## Installation

- Standard 12" (305 mm) rough-in
- Supply line sold separately
- Requires mounting plate for heated seat installation (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

7-05-2026 01:01 - US-CA