



Greek® | K-1490-X

48" x 32" drop-in bath

Features

- Extra-deep basin for full-body soaking
- Repose vinyl bath pillow for added comfort



Available Colors/Finishes

Color tiles intended for reference only.

- 0 White



Codes/Standards

CSA B45.5/IAPMO Z124
 ASTM E162
 ASTM E662

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Drain Location:	Reversible
Drain Hole Diameter:	2-1/4" (57 mm)
Minimum Flat for Door:	15/16" (24 mm)
Basin Area, Bottom:	36" x 21" (914 mm x 533 mm)
Basin Area, Top:	42" x 26" (1067 mm x 660 mm)
Water Depth:	17-7/8" (454 mm)
Water Capacity:	68 gal (257.4 L)
Minimum Floor Load:	61 lbs/ft ²
Weight:	60 lbs (27.2 kg)
Cutout:	Drop-in, 46-1/2" x 30-1/2" (1181 mm x 775 mm)

Material

- Acrylic

Recommended Products/Accessories

K-164 Undermount kit for select Greek bath and whirlpool bath models

K-1179 Tiling-in bead, 180" length

K-1491 Bath/whirlpool pillow, removable

K-1601 Bath/whirlpool footstop, removable

K-23726 Drain treatment

K-23732 Tub & shower cleaner


K-7213 Cable bath drain with PVC tubing

K-7214 Cable bath drain, less PVC tubing


K-7265 Brass toe tap bath drain



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 4-14-2026 23:7 - US-CA

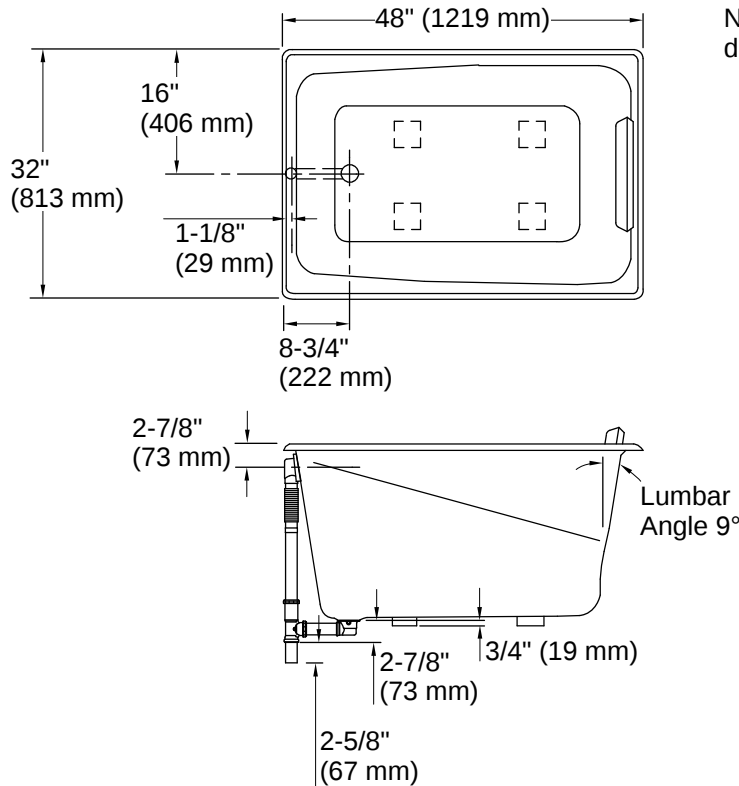

No change in measurement if connected with drain illustrated. (K-7265)

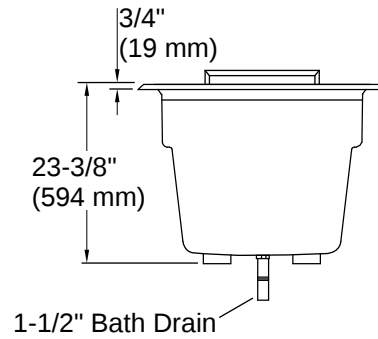

Installation

- Reversible drain
- Drop-in

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

