



Carafe® | K-18865

Filtered water kitchen sink faucet

Features

- One-piece, self-contained ceramic disc valve allows for both volume and temperature control
- 360° swivel spout with 9" (229 mm) clearance
- Quarter-turn washerless ceramic disc valve for filtered water
- Separate lever handle and filtration inlet hose for cold filtered water
- Contemporary European styling
- Flexible supplies
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar)



Available Colors/Finishes

Color tiles intended for reference only.

- CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:1 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 372
NSF/ANSI/CAN 61
DOE - Energy Policy Act 1992
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372
ADA
ICC/ANSI A117.1
CSA B651

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 7-3/4" (197 mm)

Flow Rate

Faucet Flow Rate: 2 gpm (7.6 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic Mixer

Material

- Brass

Recommended Products/Accessories

K-23723 Faucet cleaner


Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:1 - US-CA

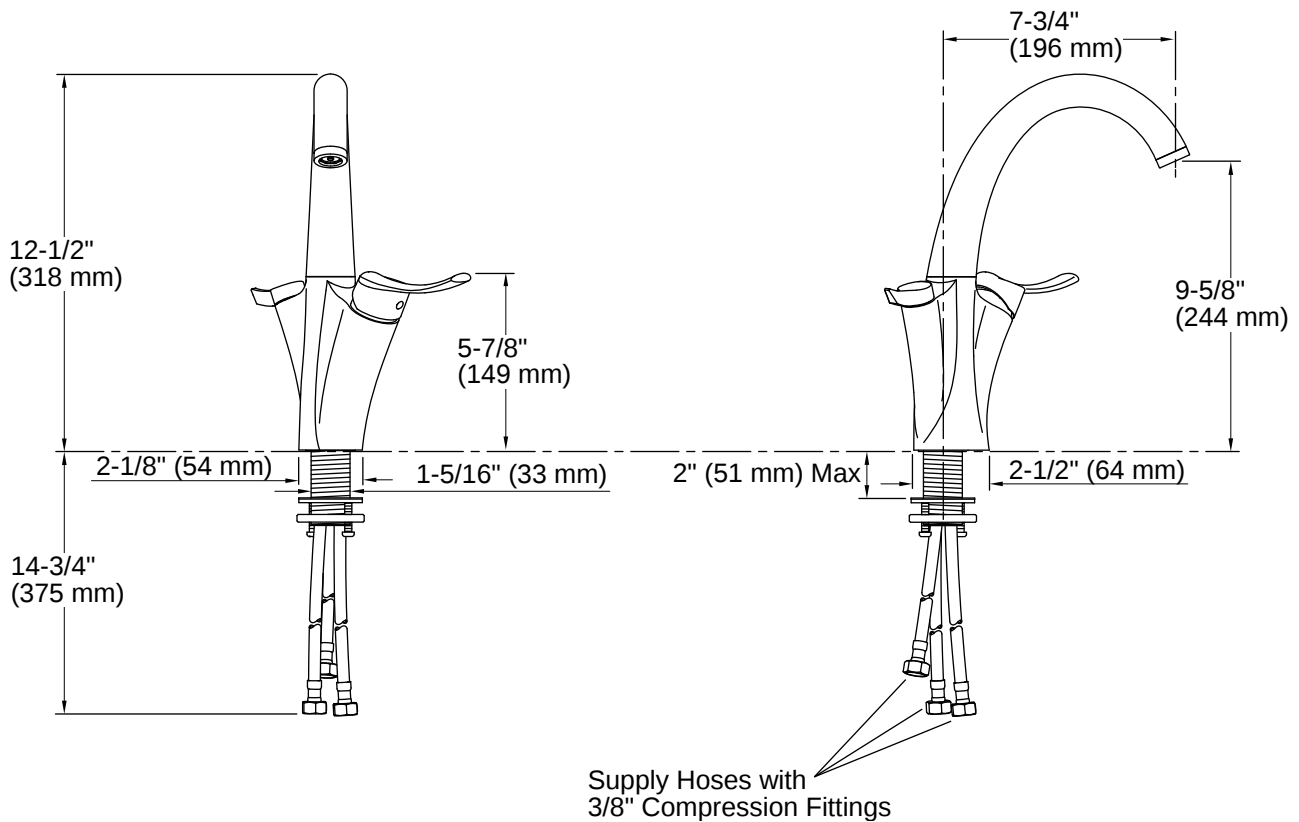

Installation

- Single-hole mounting
- Flexible connections for easy installation

Installation Notes

Install this product according to the installation instructions.

This product is not for use with instant hot water systems.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

