



# Graze® | K-22067

Deck-mount pot filler

## Features

- Articulating spout with 360° rotation offers superior clearance for filling pots on cooktops and ranges
- Swing spout provides greater coverage area in sink for easier food prep and cleanup
- 3.2 gpm (12.1 lpm) flow rate at 60 psi (4.14 bar)
- Single lever handle with main lever shutoff
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance



## Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome
- VS Vibrant Stainless
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 5:49 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

---

## Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 372

NSF/ANSI/CAN 61

NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

---

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/ Type: Lever

### Spout

Spout Reach: 3-9/16" (91 mm)

### Flow Rate

Faucet Flow Rate: 3.2 gpm (12.1 l/min)

---

## Valves

Included Valve: Ceramic disc

---

## Material

- Premium metal construction for durability and reliability
  - KOHLER finishes resist corrosion and tarnishing
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 5:49 - US-CA

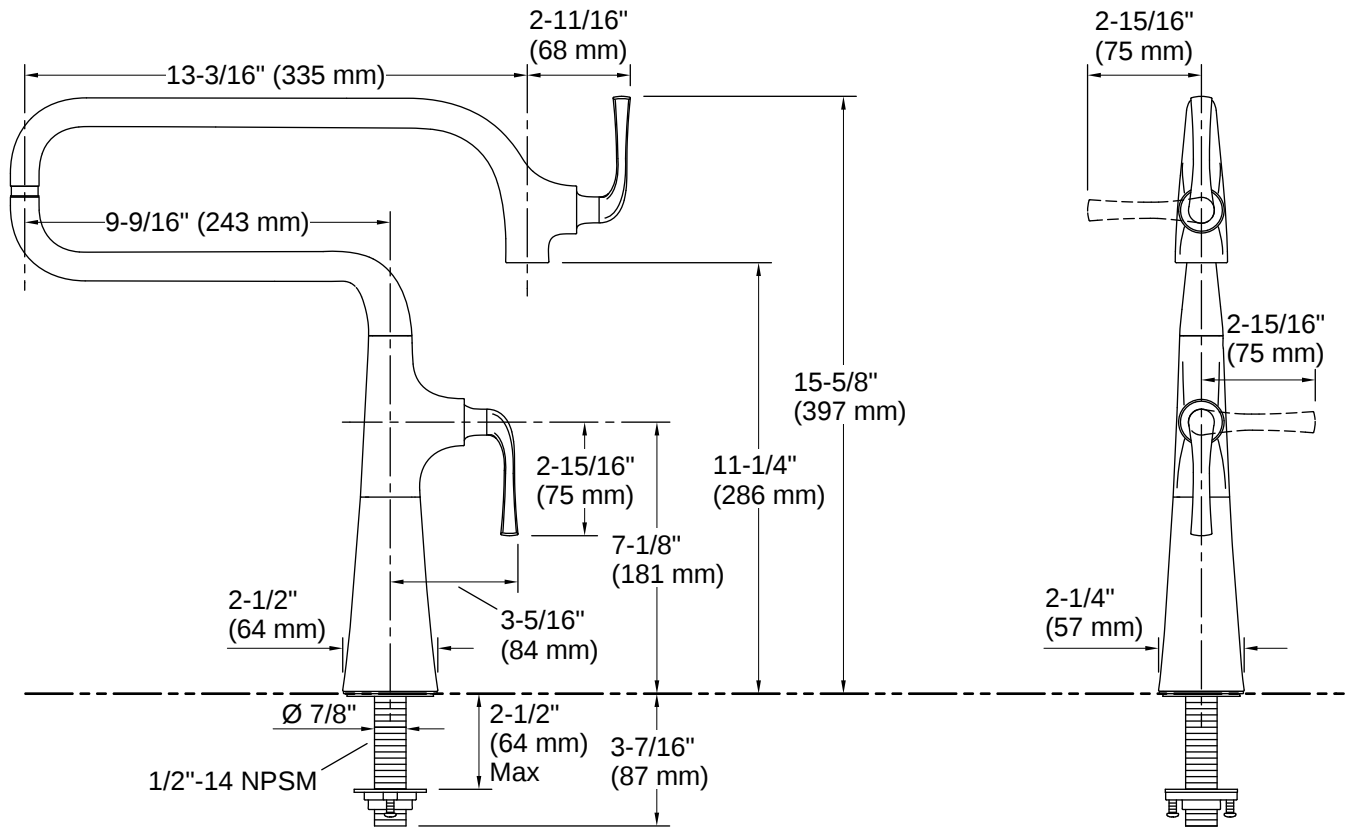

## Installation

- Deck-mount

## Installation Notes

*Install this product according to the installation instructions.*

Supply hose not included. Requires a flexible supply hose with a 3/8" compression nut and 1/2-14 NPSM nut.

