



# Aquifer® | K-22156

Reverse osmosis (RO) replacement membrane

## Features

- Reduces arsenic, fluoride, lead, TDS, bacteria, virus and more in drinking water
- Filter head automatically turns off water supply when cartridge is removed
- Replacing RO membrane every 12 months keeps filtration system performing effectively



## Available Colors/Finishes

*Color tiles intended for reference only.*

<sup>NA</sup> NA Not Applicable



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 6:3 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

---

## Codes/Standards

CSA B483.1  
NSF Protocol P231  
NSF/ANSI 58  
NSF/ANSI 58|NSF Protocol P231

---

## Material


- High-impact plastic construction
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty



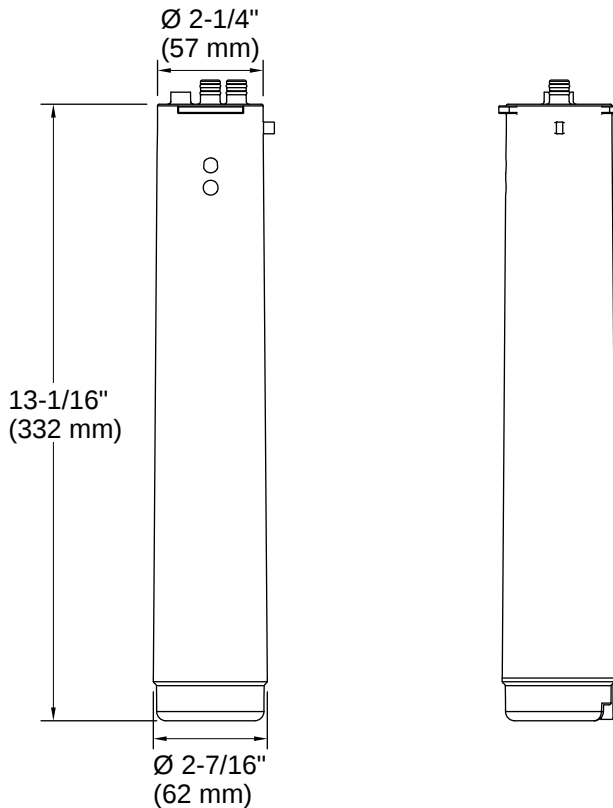

## Installation

- For cold water use only
- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement

## Installation Notes

*Install this product according to the installation instructions.*

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 12 months.

Application guideline/water supply parameters: Water Pressure: 40-100 psi (276-689 kPa) Water Temperature: 40-100°F (4.4-37.8°C).

