



# Parallel® | K-24805-JJ

Single-function showerhead, 1.25 gpm

## Features

- Single-function showerhead with 48 nozzle 5" (127 mm) diameter sprayface
- Optimized sprayface for maximum performance
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.25 gpm (4.7 lpm) maximum flow rate at 45 psi (3.1 bar)
- Requires shower arm and flange (sold separately)
- Coordinates with other products in the Parallel collection



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome
- BN Vibrant Brushed Nickel
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 2:51 - US-CA

THE BOLD LOOK  
OF **KOHLER**

---

## Codes/Standards



ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

---

## Technical Information

*All product dimensions are nominal.*

### Flow Rate

Shower/Rainhead Rated                    1.25 gpm (4.7 l/min)  
Maximum Flow:

---

## Material

- Premium material construction for durability and reliability
  - KOHLER finishes resist corrosion and tarnishing
- 

## Recommended Products/Accessories

K-7397 Shower arm and flange, 7-1/2" long

---

## Technology


- Katalyst® Plus air-induction technology infuses water with double the ratio of air to water as regular Katalyst®, creating even more invigorating droplets at a 1.25 gpm flow rate
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



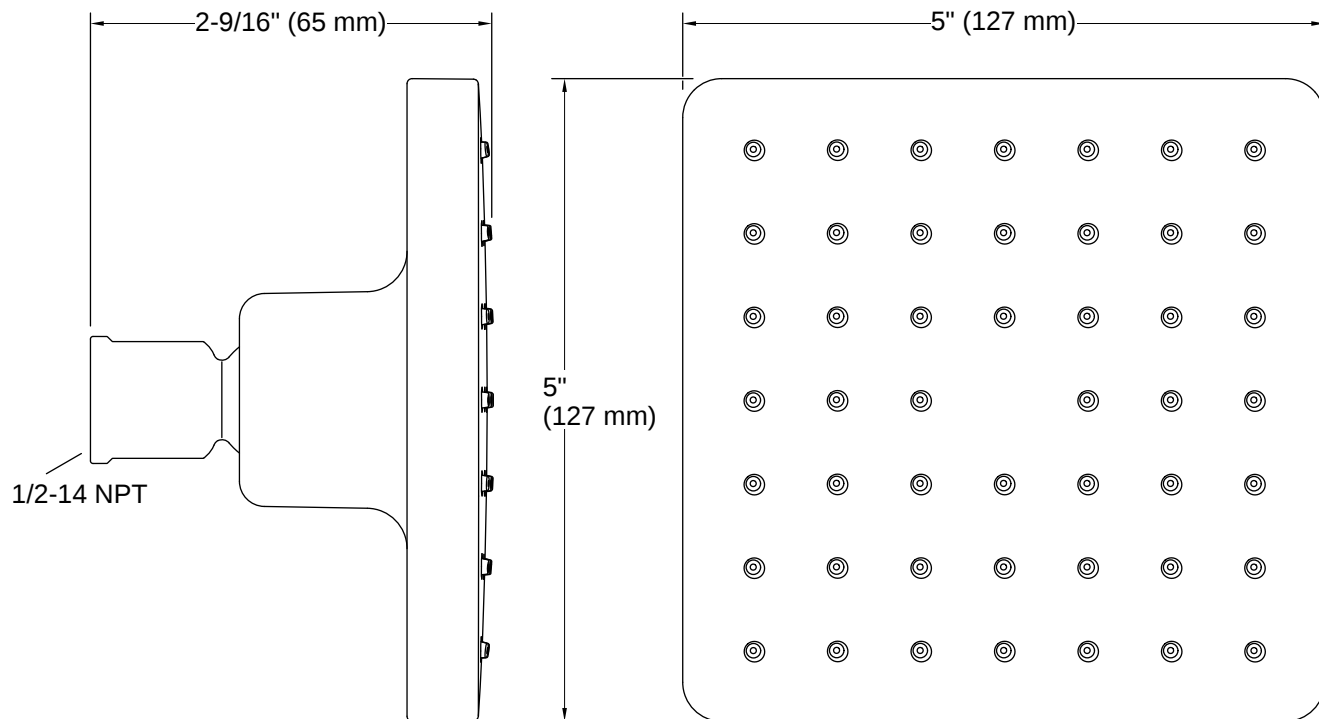

### Installation

- 1/2" -14 NPT connection
- Wall-mount

### Installation Notes

*Install this product according to the installation instructions.*

