

## Aquifer®+ | K-29651

Replacement filter cartridge two-pack with hollow fiber membrane and carbon block VOC

### Features

- Includes K-77687 carbon block VOC and K-29639 hollow fiber membrane single replacement filter cartridges
- For use with the K-29638 Aquifer®+ water filtration system
- Reduces Bacteria, Virus, Chlorine Taste & Odor, Chloramine, Particulate Class I, Lead, Asbestos, Cyst, Mercury, Turbidity, and select Pharmaceuticals. See Performance Data Sheet for individual contaminants and reduction performance
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water
- Hollow fiber membrane technology reduces bacteria and virus in the water
- 0.85 gpm maximum flow rate at 60 psi
- Filter head automatically turns off water supply when cartridge is removed



### Available Colors/Finishes

*Color tiles intended for reference only.*

<sup>NA</sup> NA Not Applicable



---

## Codes/Standards

NSF Protocol P231  
NSF/ANSI 42  
NSF Protocol P473  
NSF/ANSI 401  
NSF/ANSI 53  
NSF/ANSI 42|NSF/ANSI 53|NSF/ANSI 401|NSF Protocol P231|NSF  
Protocol P473

---

## Technical Information

*All product dimensions are nominal.*

### Flow Rate

Faucet Flow Rate: 0.85 gpm (3.2 l/min)

---

## Material


- High-impact plastic construction
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty



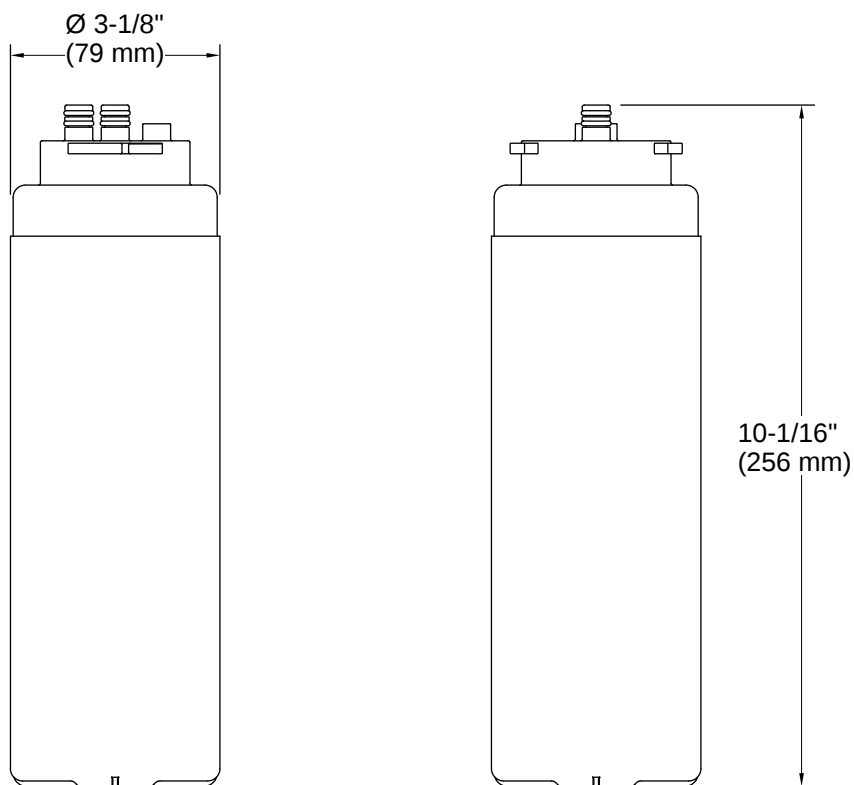

## Installation

- Under-sink
- Quarter-turn twist cartridge for easy installation and replacement
- For cold water use only

## Installation Notes

*Install this product according to the installation instructions.*

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters: Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C)

Capacity: 389 gal (1,472 L)

