

## Jolt® | K-30617

Two-handle bar sink faucet

### Features

- High-arch gooseneck swivel spout offers superior clearance for filling pots and cleaning
- Two Lever handles offer separate control of hot and cold water
- Aerated flow
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Quarter-turn washerless ceramic disc valves
- Less drain



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

■ CP Polished Chrome



## Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651

## Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type: Lever

### Spout

Spout Reach: 5" (127 mm)

### Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

## Valves

Included Valves: Ceramic disc, Volume Control

## Material


- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Recommended Products/Accessories

K-23723 Faucet cleaner



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 6:22 - US-CA

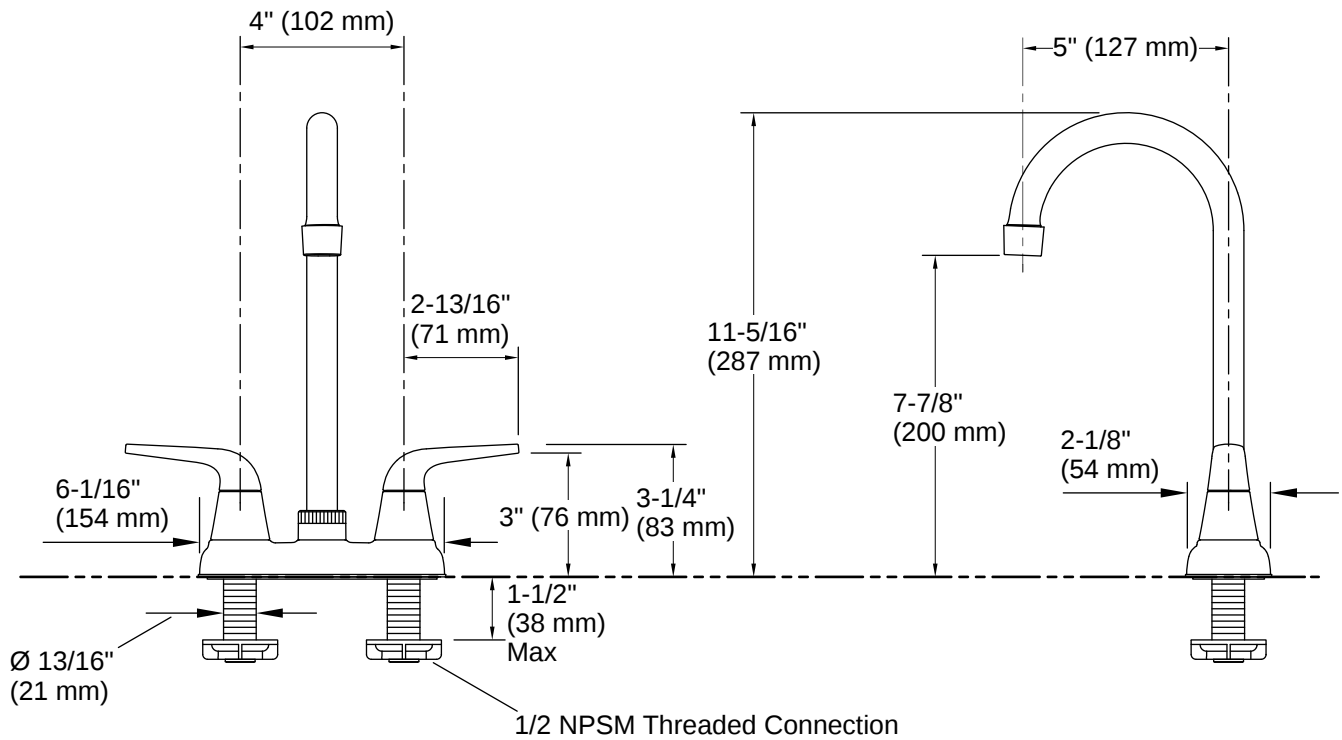

## Installation

- For 4" (102 mm) centers
- Three-hole installation

## Installation Notes

*Install this product according to the installation instructions.*

ADA compliant for faucet handles only  
 ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

