



# Anthem™ EvoCycle™ | K-33482

Hybrid smart shower system for rainhead and handshower

## Features

- Select Standard mode from handshower or select Cycle mode from rainhead
- Cycle mode recirculates water for up to 80% in water savings
- Built-in vacuum breaker prevents backflow
- Digital control features touch screen with easy-to-read icons and large temperature control dial
- Ozone cleaning cycle can be run after every use, ensuring shower is ready for next user
- Anthem™ two-port thermostatic digital valve allows for both a handshower and rainhead
- Use with KOHLER Konnect® app for remote start/stop, water-saving tracking, and system updates
- 1/2" (13 mm) valve inlets and outlets with brass tube connections
- Convenient shelf holds shower essentials
- Box includes: Thermostatic digital shower valve, digital control, ozone controller, shower rail, vacuum breaker with shelf, shower receptor cover, electronic components
- Pair with optional Anthem remote on/off button (sold separately)
- Requires KOHLER® Anthem EvoCycle shower base, rainhead, handshower, and shower hose (each sold separately)
- Cycle mode can reach a max temperature up to 109°F, dependent on bathroom conditions



## Available Colors/Finishes

*Color tiles intended for reference only.*

|     |                               |
|-----|-------------------------------|
| CP  | Polished Chrome               |
| BN  | Vibrant Brushed Nickel        |
| BL  | Matte Black                   |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
6-29-2026 21:1 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
ASME A112.18.2/CSA B125.2  
CSA B64  
ASSE 1001  
ASSE 1016/ASME A112.1016/CSA B125.16

## Valves

Included Valve: Digital

### Shower Valve

Flow Rate Maximum @ 45 psi: 12 gpm (45.4 l/min)

Manufacturer's Minimum Rated Flow: 0.9 gpm (3.4 l/min)

Pressure: 45 psi (3.1 bar)

Maximum Static Pressure: 125 psi (8.6 bar)

Minimum Operating Pressure: 20 psi (1.4 bar)

## Material

- Brass
- Thermoplastic resin
- Thermoplastic-encased valve and ozone controller
- Durable metal construction
- KOHLER finishes resist corrosion and tarnishing

## Required Products/Accessories

- K-33471 60" x 42" alcove shower base, left drain
- or
- K-33480 48" x 32" alcove shower base, right drain
- or
- K-33472 60" x 42" alcove shower base, right drain
- or
- K-33473 60" x 32" alcove shower base, left drain
- or
- K-33474 60" x 32" alcove shower base, right drain
- or
- K-33475 60" x 36" alcove shower base, left drain
- or
- K-33476 60" x 36" alcove shower base, right drain
- or
- K-33477 48" x 36" alcove shower base, left drain
- or
- K-33478 48" x 36" alcove shower base, right drain
- or
- K-33479 48" x 32" alcove shower base, left drain

## Connectivity




The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license.

## Warranty

See website for detailed warranty information.

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty|KOHLER® Faucet Lifetime Limited Warranty



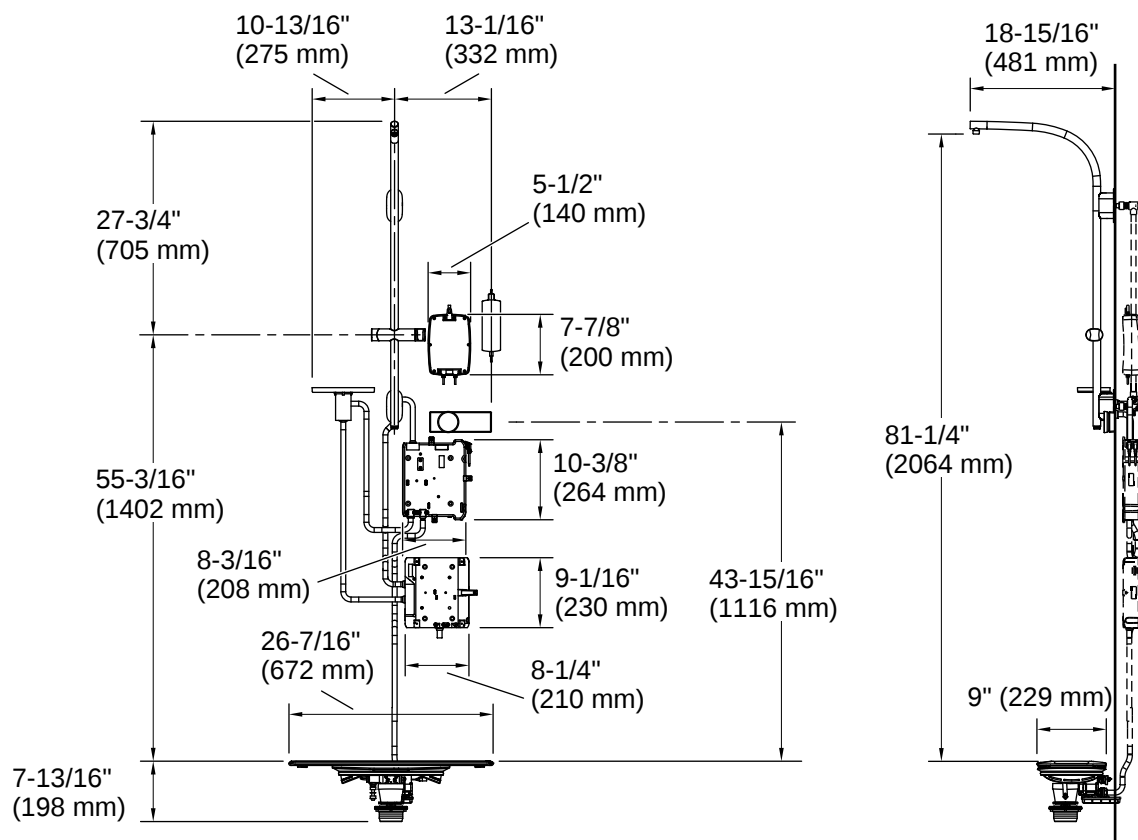

## Installation

- Requires minimum room size of 8' x 8' x 8' (2438 x 2438 x 2438 mm)

## Installation Notes

*Install this product according to the installation instructions.*

For use with showerheads or handsprays rated at 0.9 gal/min (3.4 l/min) or higher.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

6-29-2026 21:1 - US-CA