



Atmo® | K-34457

13-7/8" x 13-7/8" smart bathroom exhaust fan with light

Features

- Three fan control speed settings (100, 130, 150 CFM) with standard 6" (152 mm) air duct. CFM will vary with 4" (102 mm) air duct
- Lowest speed operates at a whisper-quiet 0.4 sones with standard 6" (152 mm) air duct and at 0.6 sones with 4" (102 mm) air duct
- Remote control controls fan speed, light on/off and brightness, and choice of five light temperatures from 2700 K – 6500 K
- Download the KOHLER Konnect® app for additional functionality, such as creating automatic on/off run schedules, setting fan speed, light temperature, circadian light schedule, and humidity sensor level
- Remote control mounts anywhere in bathroom, even over existing fan switch
- Fits standard bathroom exhaust fan cutouts to make upgrading easy
- 6" to 4" duct reducer ensures airflow efficiency by creating connection between air duct openings of two different sizes
- Box contains fan, remote control, 6" to 4" air duct reducer, two CR2032 3V lithium coin cell batteries, mounting hardware



Available Colors/Finishes

Color tiles intended for reference only.

0	White
NA	Not Applicable



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-03-2026 10:28 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

UL 507
CSA C22.2 No. 113
ENERGY STAR®
cUL Listed

Required Electrical Service

One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Lights: 120 V, 15 A, 60 Hz

Electrical Component Ratings



Lights: 60 Hz, 114 W, 1500 Lumens

Warranty

See website for detailed warranty information.

KOHLER® Bath Fan Three-Year Limited Warranty



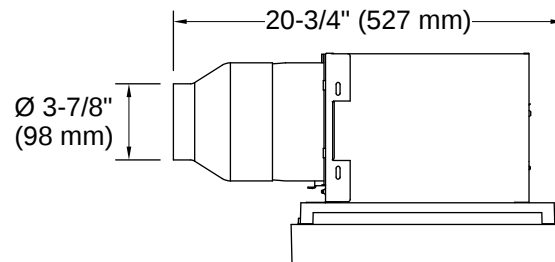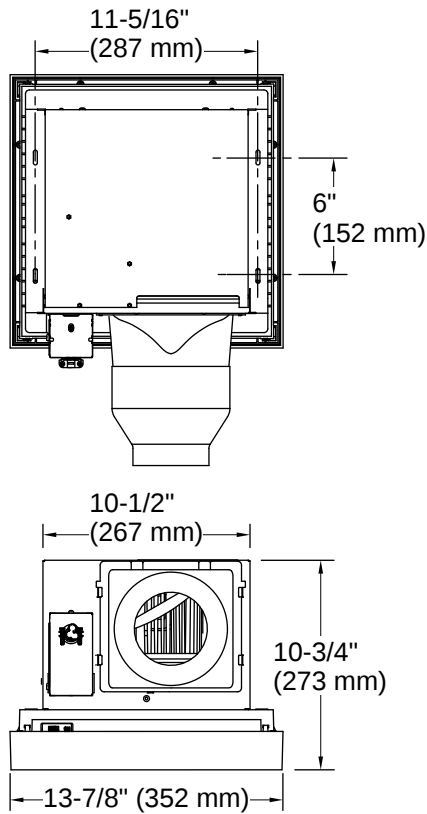

Installation

- Ceiling-mount

Installation Notes

Install this product according to the installation instructions.

