



Triton® Bowe® | K-400T70-5AKC

Centerset bathroom sink faucet

Features

- Two-handle centerset faucet for 4" (102 mm) centers
- Swing/rigid spout
- Quarter-turn washerless ceramic disc valves ensure a lifetime of durable performance
- 1.0 gpm (3.8 lpm) maximum flow rate at 60 psi (4.14 bar)
- Free flow outlet with water flow regulator at bottom of spout
- Vandalproof ADA-compliant wristblade handles with red and blue indexing
- Less drain
- Brass construction and valve bodies



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:10 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 372

NSF/ANSI/CAN 61

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

NSF/ANSI/CAN 61|NSF/ANSI/CAN 372

ADA

ICC/ANSI A117.1

CSA B651

OBC

Technical Information

All product dimensions are nominal.

Handle

Handle Style/ Type: Lever

Spout

Spout Reach: 5-3/16" (132 mm)

Flow Rate

Faucet Flow Rate: 1 gpm (3.8 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic Mixer

Recommended Products/Accessories

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 6:10 - US-CA

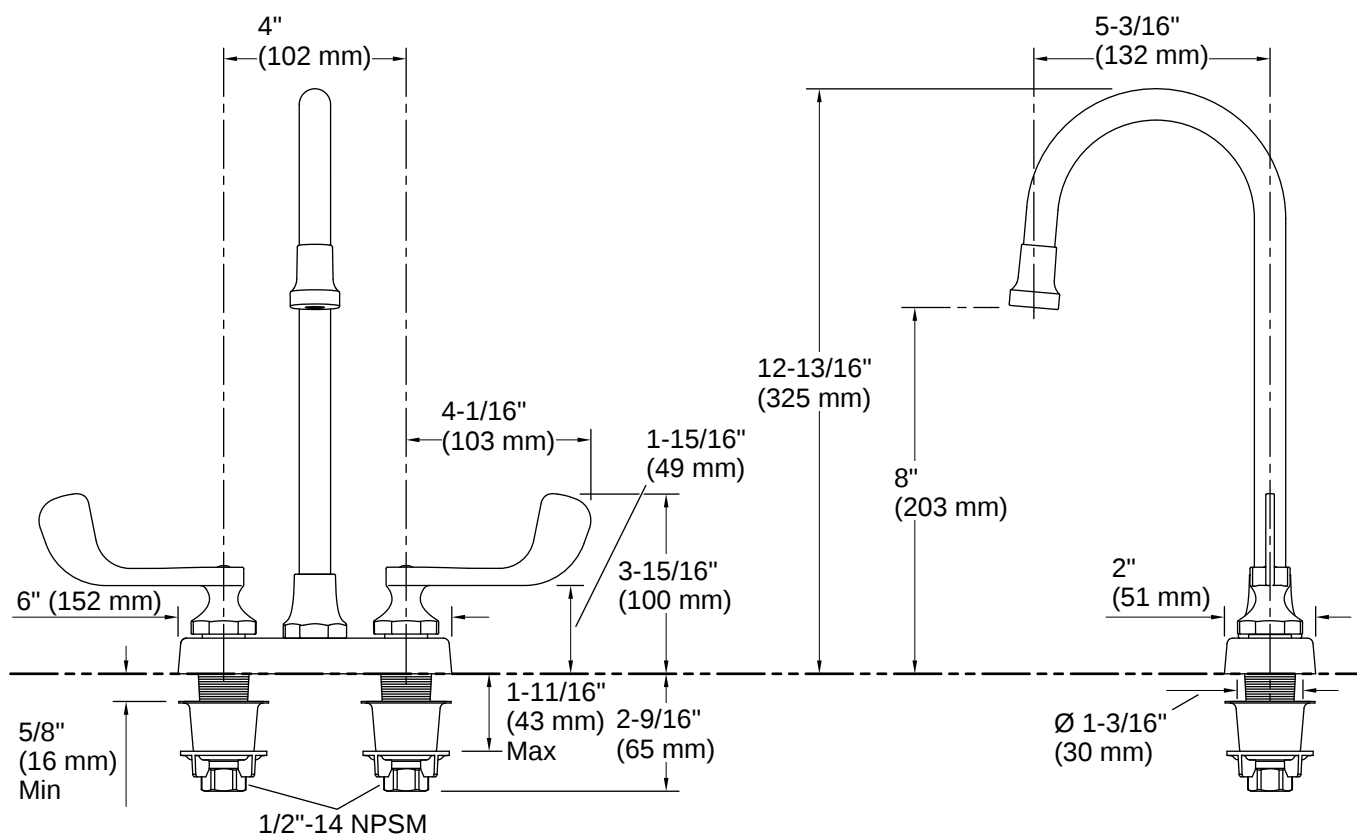

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

