

## Gooseneck | K-7519-SATA

Touchless single-hole lavatory faucet with Insight™ sensor technology and temperature mixer, HES-powered, less drain, 0.35 gpm

### Features

- 0.35 gpm (1.3 lpm) maximum flow rate at 60 psi (4.14 bar)
- Vandal-resistant aerator
- Factory-set 30-second maximum continual run cycle
- 24" (610 mm) flexible supply hose for easy installation
- Less drain
- Includes 3.6 volt Hybrid Energy Cell



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA   CSA B651   OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

---

## Technical Information

All product dimensions are nominal.

### Spout

Spout Reach: 6-3/16" (157 mm)

### Flow Rate

Faucet Flow Rate: 0.35 gpm (1.3 l/min)

---

## Material

- Brass
- 

## Technology


- Electronic Insight™ sensor technology for accurate and consistent activation
- 

## Warranty

See [website](#) for detailed warranty information.

KOHLER® One-Year Limited Warranty



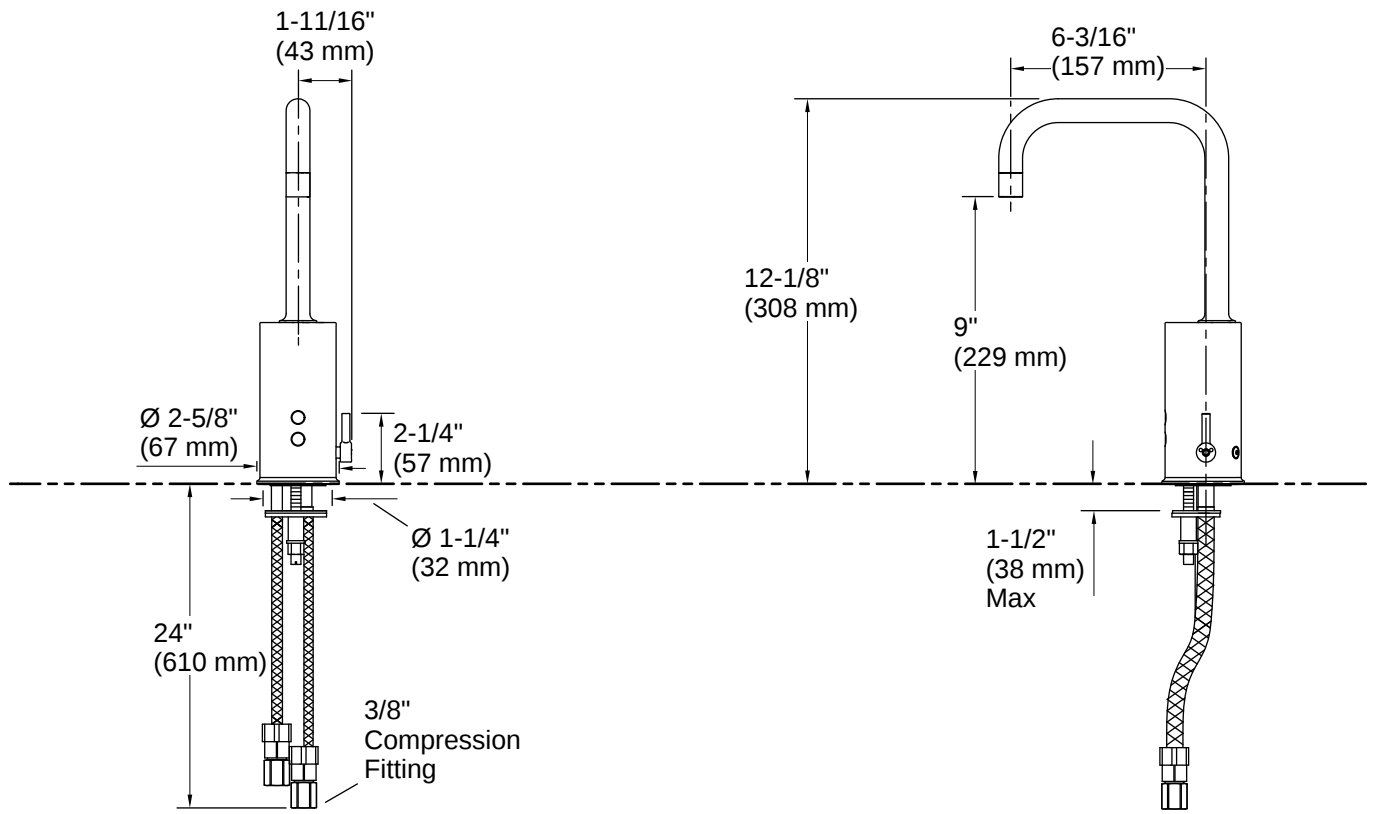

## Installation

- Single-hole mounting
- Above-counter valve for easy installation and maintenance

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

