



Aquifer® | K-77686

Double-cartridge water filtration system

Features

- Two-stage filtration and absorption system
- Reduces Chlorine Taste & Odor, Chloramine, Particulate Class I, Lead, Asbestos, Cyst, Mercury, Turbidity, and select Pharmaceuticals. See Performance Data Sheet for individual contaminants and reduction performance
- Reduces over 95% of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS) in drinking water
- Filter head automatically turns off water supply when cartridge is removed
- 1.7 gpm (gallons per minute) maximum flow rate at 60 psi
- Eco-friendly coconut shell-based carbon filter
- Recommended for use with KOHLER® beverage faucets
- Filters cold water only when installed with a kitchen or bathroom faucet
- Includes K-77688 replacement cartridge two-pack



Available Colors/Finishes

Color tiles intended for reference only.

^{NA} NA Not Applicable



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:2 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF Protocol P473
NSF/ANSI 401
NSF/ANSI 53
NSF/ANSI 42|NSF/ANSI 53|NSF/ANSI 401|NSF Protocol P473

Technical Information

All product dimensions are nominal.

Flow Rate

Faucet Flow Rate: 1.7 gpm (6.4 l/min)

Material

- High-impact plastic construction
-

Recommended Products/Accessories

K-77688 Two-pack replacement filter cartridges


K-26369 Beverage faucet

Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty



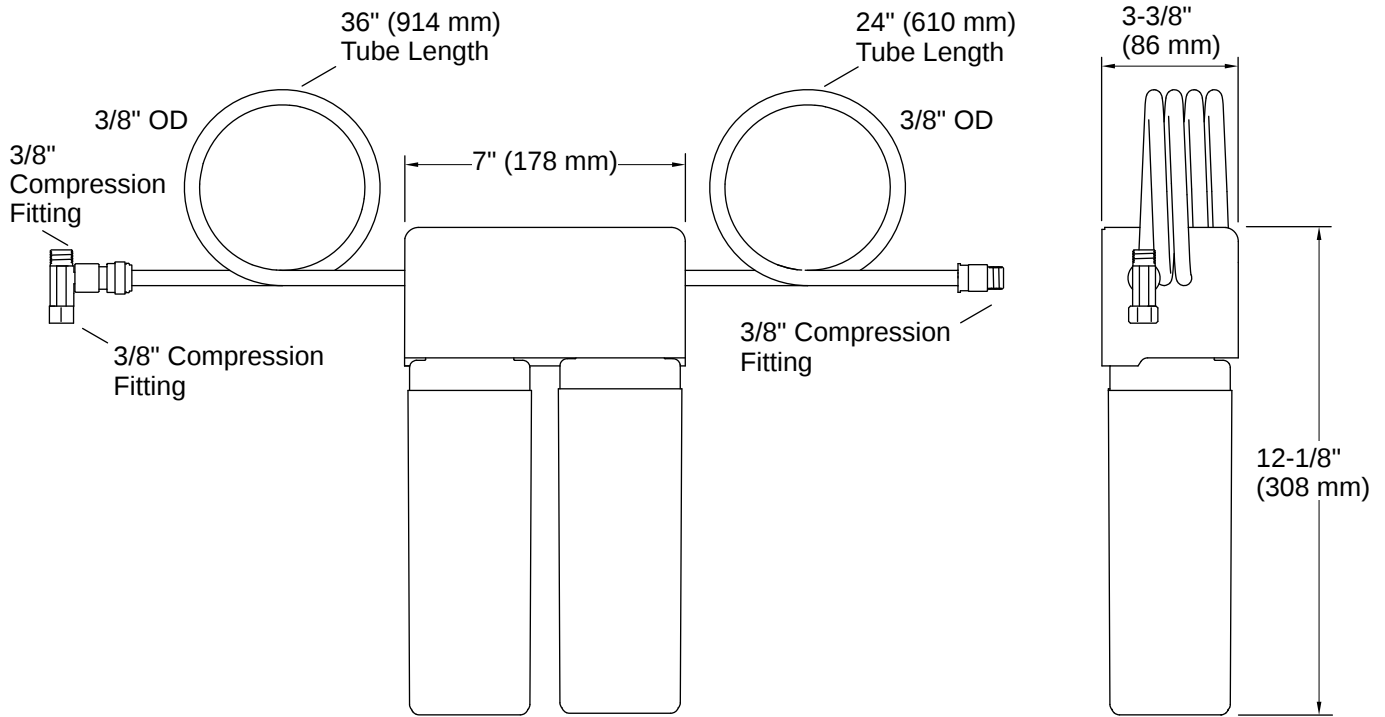

Installation

- Quarter turn twist cartridge replacement for easy install and replacement

Installation Notes

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters: Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C)

Capacity: 778 gal (2,945 L)



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

4-15-2026 6:2 - US-CA