

## Triton® Bowe® | K-800T20-4ANL

0.5 gpm widespread bathroom sink faucet with laminar flow and lever handles, drain not included

### Features

- Brass construction and valve bodies
- Three-hole installation for 8" to 16" centers
- Quarter-turn washerless ceramic disc valves
- Less drain and lift rod
- Vandal-resistant laminar outlet
- Lever handles
- 0.5 gpm (1.9 lpm) maximum flow rate at 60 psi (4.14 bar)



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome



---

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA   CSA B651   OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

---

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type:                      Lever

### Spout

Spout Reach:                                5-1/2" (140 mm)

### Flow Rate

Faucet Flow Rate:                        0.5 gpm (1.9 l/min)

---

## Valves

Included Valves:                          Ceramic disc, Thermostatic Mixer

---

## Recommended Products/Accessories

K-23723 Faucet cleaner


---

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



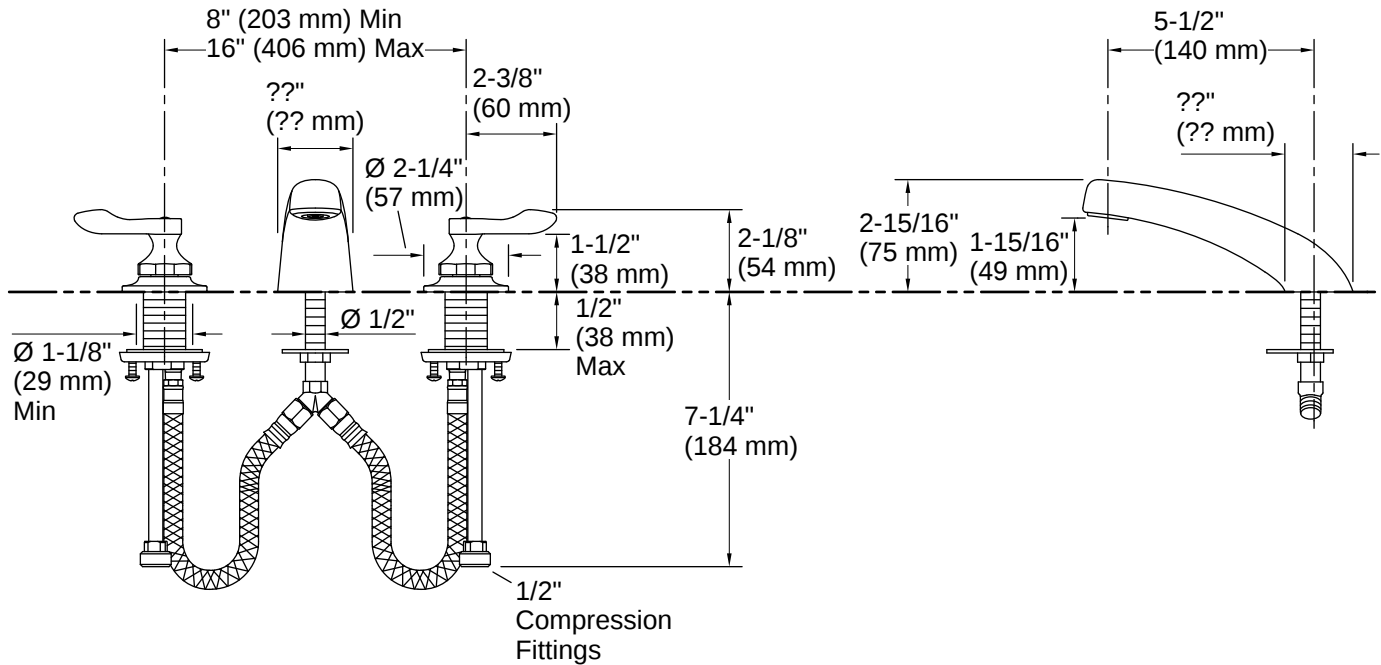

### Installation Notes

*Install this product according to the installation instructions.*

ADA compliant for handles only.  
 ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

