



# Mach<sup>®</sup> Manual | K-80TM00R10

Toilet flushometer, 1.6 gpf

## Features

- 1.6 gpf (6.0 lpf)
- 125-micron filter protects internal components
- High back pressure vacuum breaker
- Locking stop cap and nonhold open design provide protection against vandalism
- No external flush volume adjustment ensures water conservation
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Patented piston technology for superior flush volume accuracy



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ASSE 1037/ASME A112.1037/CSA B125.37

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type: Lever

## Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 25 psi (172.4 kPa)

Minimum Flow Rate: 25 gpm (94.6 l/min)

## Material

- Brass construction with durable Polished Chrome finish

## Recommended Products/Accessories

1421939 Extension Kit

1509698 Assembly, Fv Pressure Gauge, 1/8"

K-23723 Faucet cleaner

## Technology

- Double seal handle design for long life without leaks
- Nonhold open piston technology for accurate activation




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 4:2 - US-CA

\*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

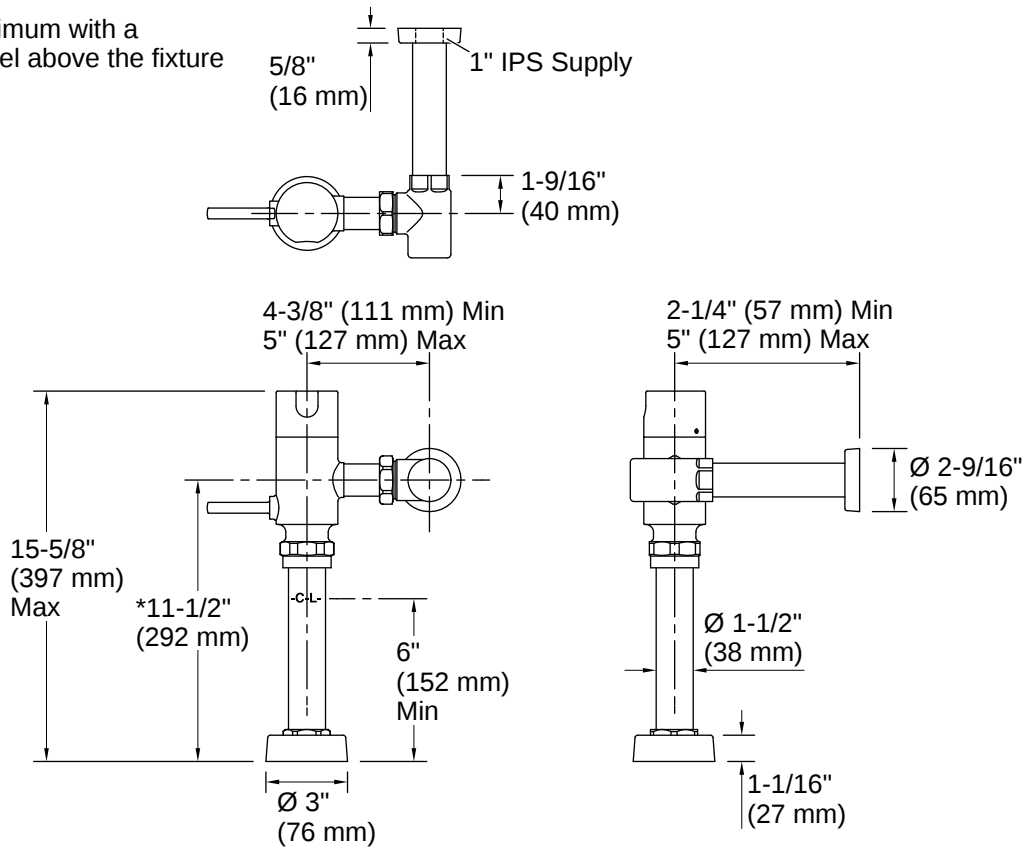

## Installation

- For toilet installations with 1-1/2" top spud coupling connection
- Can be installed for left- or right-handed users

## Installation Notes

*Install this product according to the installation instructions.*

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

