

## Triton® Bowe® | K-815T20-4AHA

1.5 gpm kitchen sink faucet with 8-3/16" swing spout, aerated flow and lever handles

### Features

- Quarter-turn washerless ceramic disc valves
- Vandal-resistant aerator
- Vandal resistant lever handles with red and blue indexing
- 8-3/16" (208 mm) swing spout
- Less drain
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

■ CP Polished Chrome



## Codes/Standards

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
NSF/ANSI/CAN 61  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
NSF/ANSI/CAN 61|NSF/ANSI/CAN 372  
ADA  
ICC/ANSI A117.1  
CSA B651

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

## Technical Information

All product dimensions are nominal.

### Handle

Handle Style/ Type: Lever

### Spout

Spout Reach: 8-3/16" (208 mm)

### Flow Rate

Faucet Flow Rate: 1.5 gpm (5.7 l/min)

## Valves

Included Valves: Ceramic disc, Thermostatic Mixer


## Material

- Brass
- Brass valve bodies

## Recommended Products/Accessories

K-23723 Faucet cleaner



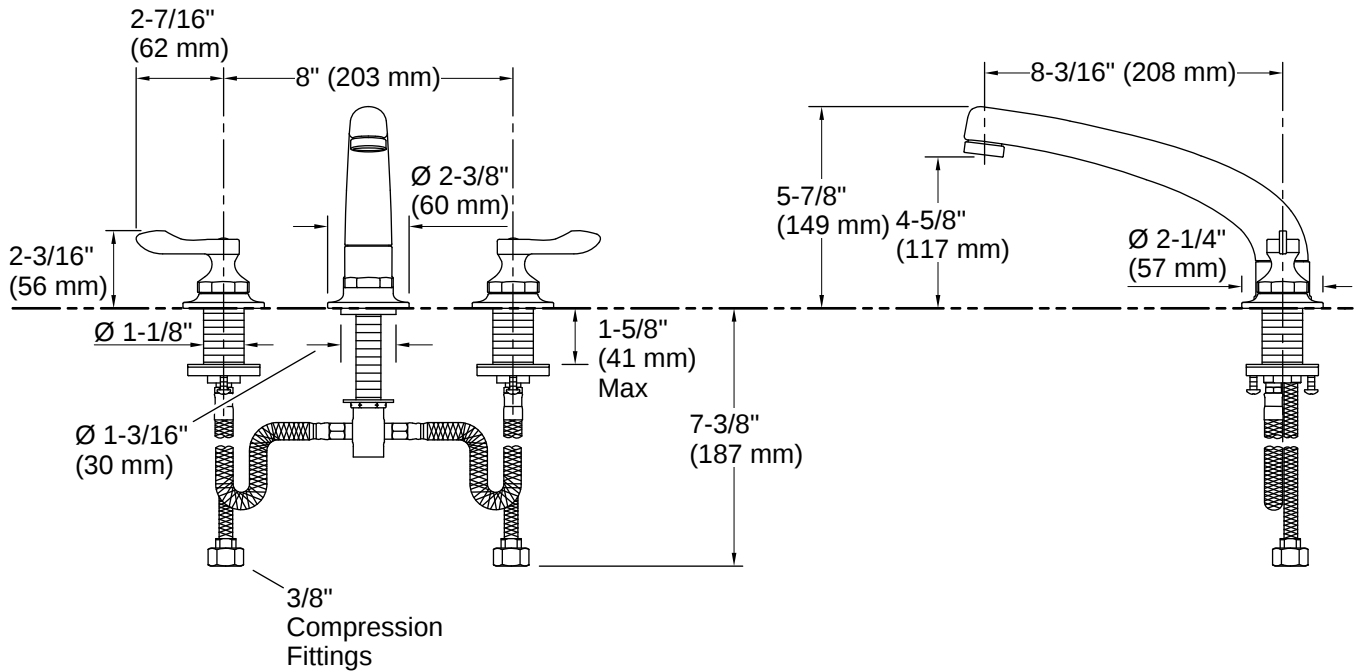

## Installation

- For 8" (203 mm) centers

## Installation Notes

*Install this product according to the installation instructions.*

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

