



# Purist® | K-T11841

Wall-mount touchless faucet trim with Insight™ technology and 6" 90-degree spout, requires valve

## Features

- 0.5 gpm (1.9 lpm) maximum flow rate
- This is trim set only. It requires valve kit to complete the faucet
- Vandal-resistant aerator
- Less drain
- Complies with the Safe Drinking Water Act (SDWA)
- On-demand on and off control. Valve kit is factory-set to 30-second maximum continual run cycle



## Available Colors/Finishes

*Color tiles intended for reference only.*

- VS Vibrant Stainless



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1  
NSF/ANSI/CAN 372  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## Technical Information

All product dimensions are nominal.

### Spout

Spout Reach: 6-1/8" (156 mm)

### Flow Rate

Faucet Flow Rate: 0.5 gpm (1.9 l/min)

## Valves

Required Valve: Thermostatic Mixer

## Material

- Brass

## Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

## Technology


- Valve kit has electronic Insight™ sensor technology for accurate and consistent activation
- This trim set can be used with 11830-NA (Hybrid-DC power) wall mount valve or 11843-NA (AC Power) wall mount valve

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



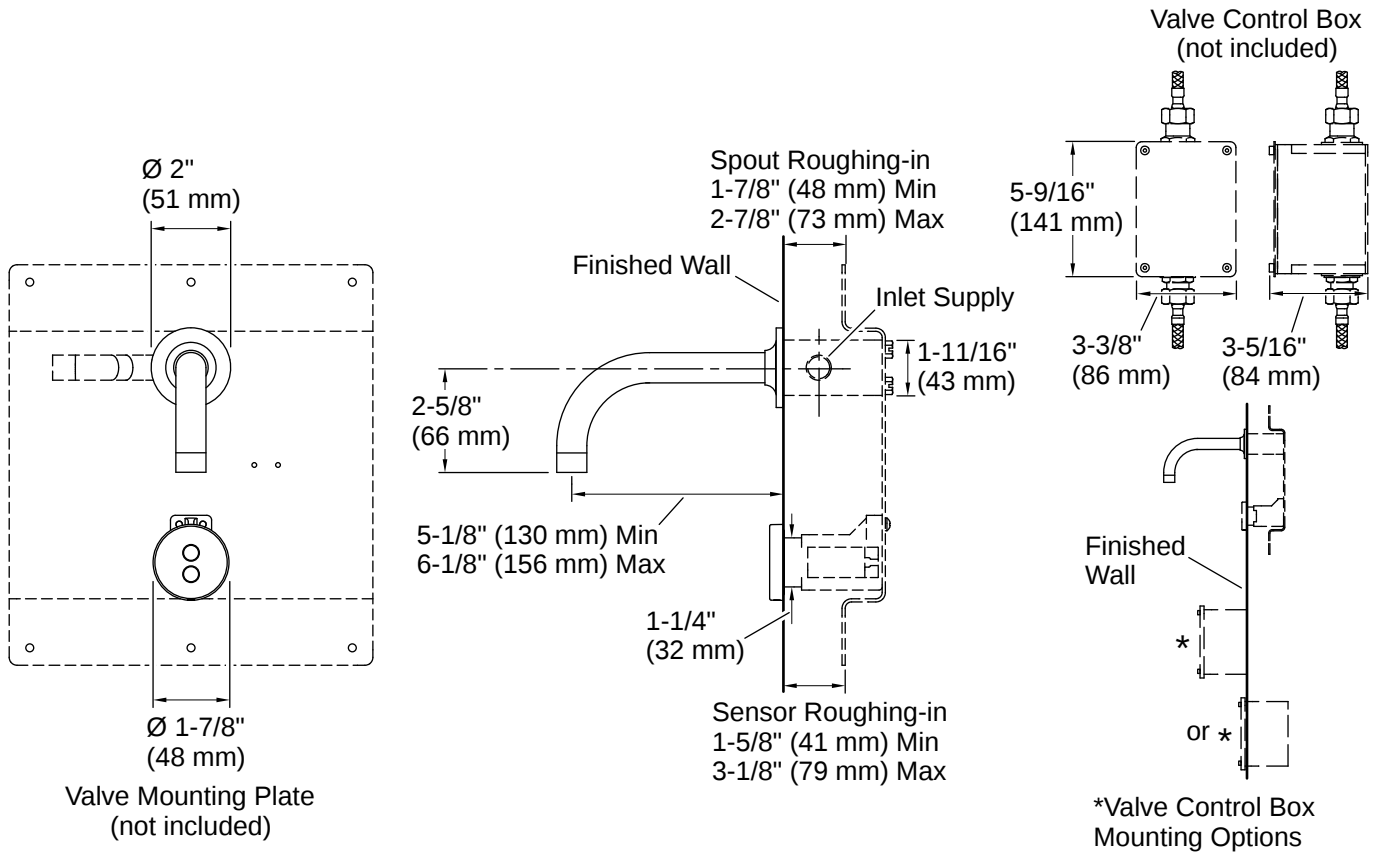

## Installation

- Single-hole spout mounting. Please consider appropriate distance between spout and sensor
- Below the counter valve for easy installation and maintenance

## Installation Notes

*Install this product according to the installation instructions.*

The sensor roughing-in allows for installation to a back splash or thicker finished wall than the spout roughing-in.  
 ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

