

## Purist® | K-T14420-4G

Rite-Temp® bath and shower trim kit with push-button diverter and lever handle, 1.75 gpm

### Features

- Lever handle
- 35° spout
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom



### Sustainability



### Available Colors/Finishes

*Color tiles intended for reference only.*

- CP Polished Chrome
- SN Vibrant Polished Nickel
- AF Vibrant French Gold
- BN Vibrant Brushed Nickel
- BV Vibrant Brushed Bronze
- BL Matte Black
- 2MB Vibrant Brushed Moderne Brass
- TT Vibrant Titanium
- BGP Vibrant Brushed Graphite



## Codes/Standards



ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

---

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/ Type:                      Lever

### Spout

Spout Reach:                                8" (204 mm)

### Flow Rate

Shower/Rainhead Rated                1.75 gpm (6.6 l/min)

Maximum Flow:

Handshower Rated Maximum        1.75 gpm (6.6 l/min)

Flow:

---

## Valves

Required Valves:                          Diverter, Pressure Balance

---

## Material

- Premium material construction for durability and reliability
  - KOHLER finishes resist corrosion and tarnishing
- 

## Required Products/Accessories

- K-11748 Series Rite-Temp® Valves
- 


## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty

---



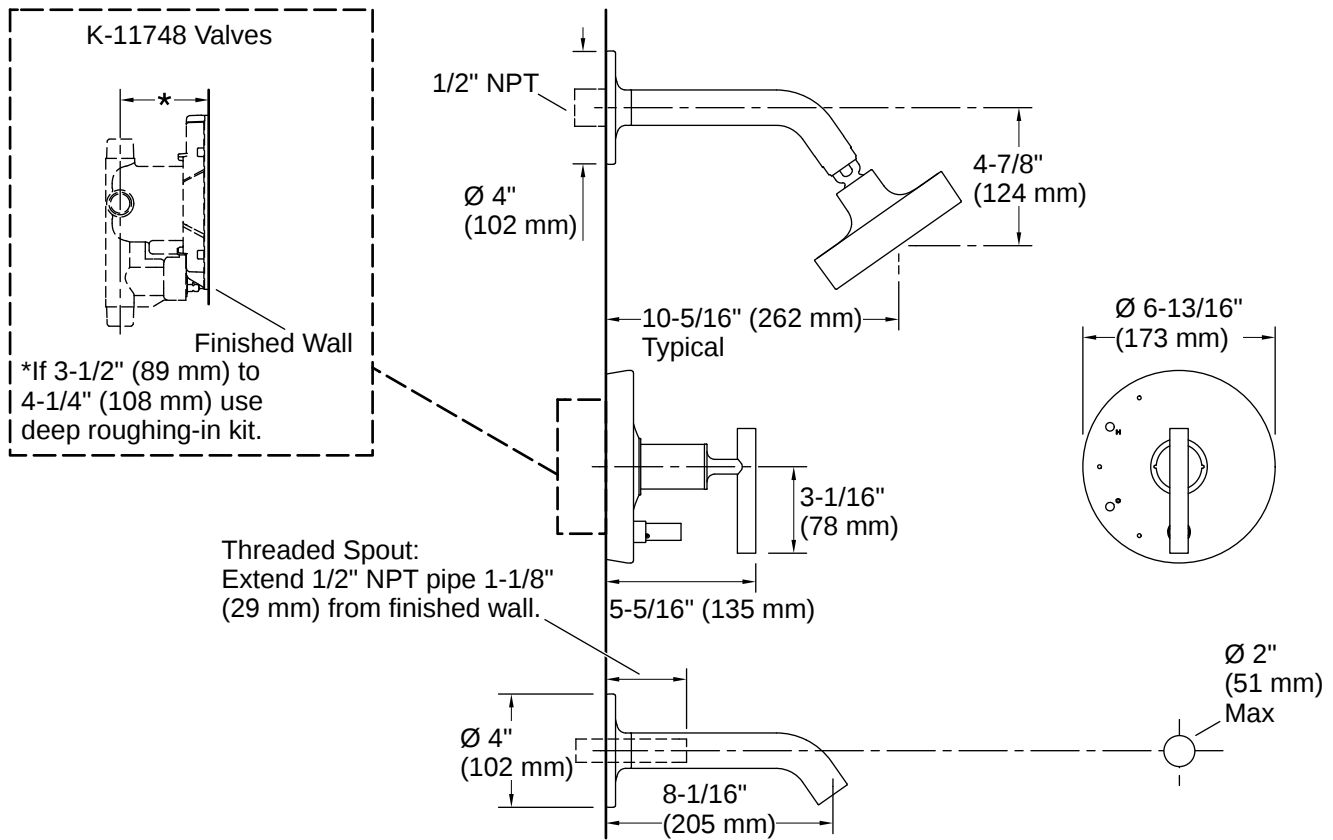

## Installation

- Trim only; requires valve to complete installation (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

For use with automatic compensating valves rated at 1.6 gal/min (6.1 l/min) or less.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

