

# LACAVA



## CIGNO built-in 2-way or 3-way diverter 15D2/3.C.R, 15D2S/3S.C.R

### Specifications:

|                                       |                                                                                                                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Installation:</b>                  | built-in wall mount                                                                                                                                                                                                        |
| <b>Exterior Dimensions:</b>           | W: 2 3/4" H: 2 3/4"                                                                                                                                                                                                        |
| <b>Material:</b>                      | solid brass construction ceramic cartridge                                                                                                                                                                                 |
| <b>Water use:</b>                     | 10 GPM (43.5 PSI)                                                                                                                                                                                                          |
| <b>Finishes:</b>                      | PS - polished brass<br>51 - brushed brass<br>BG - brushed gold<br>PB - polished bronze<br>NI - brushed nickel<br>BB - brushed bronze                                                                                       |
|                                       | W 100% } o } • V } I o<br>Zr 100% } o } • Z } u<br>< r o } Z } u                                                                                                                                                           |
|                                       | GM - gun metal<br>TN - titanium<br>44 - matte black                                                                                                                                                                        |
| <b>Fittings included as selected:</b> | - non-sharing 2-way diverter rough-in #VD2<br>- sharing 2-way diverter rough-in #VD2S<br>- non-sharing 3-way diverter rough-in #VD3<br>- sharing 3-way diverter rough-in #VD3S<br>- universal trim 15D2_2S_3_3S_15ST.C.R-A |

**Tile opening max size:**  $\varnothing$  2 1/2"

### Features:

- # 15D2.C.R non-sharing 2-way diverter with OFF function operating angle 90°, total turning angle 180° (outlet B and C)
- # 15D2S.C.R sharing 2-way diverter with OFF function operating angle 90°, total turning angle 360° (outlet B, B+C and C)
- # 15D3.C.R non-sharing 3-way diverter with OFF function operating angle 60°, total turning angle 360° (outlet B, A and C)
- # 15D3S.C.R sharing 3-way diverter with OFF function operating angle 60°, total turning angle 360° (outlet B, B+A, A, C+A and C)
- curved stick handle and round backplate
- 1/2" NPT water IN and OUT connection
- 1" extension kit available

### Codes + Standards:



- { Meets and exceeds applicable national codes and standards
- { CAL-Green compliant (non-sharing valves)

**ADA**

compliant when installed to specific requirements of this regulation

### Recommended Items:

- Replacement parts:
  - VD2-C ceramic cartridge for 2-way diverter, non-sharing
  - VD2S-C ceramic cartridge for 2-way diverter, sharing
  - VD3-C ceramic cartridge for 3-way diverter, non-sharing
  - VD3S-C ceramic cartridge for 3-way diverter, sharing
  - VD2\_3-EX 1" extension kit

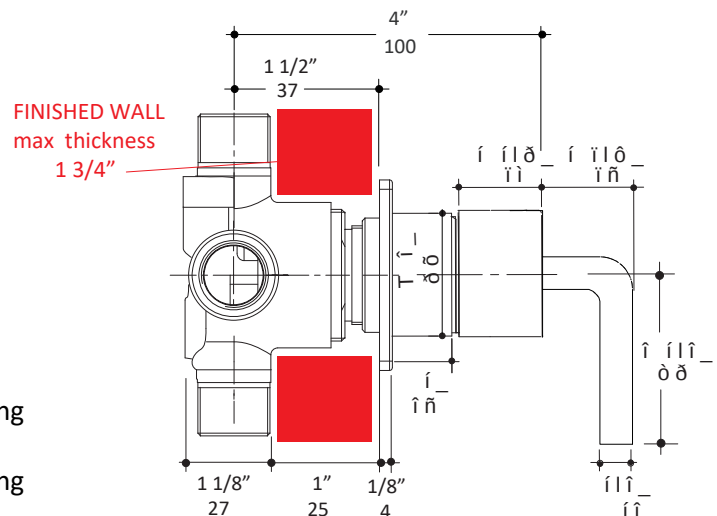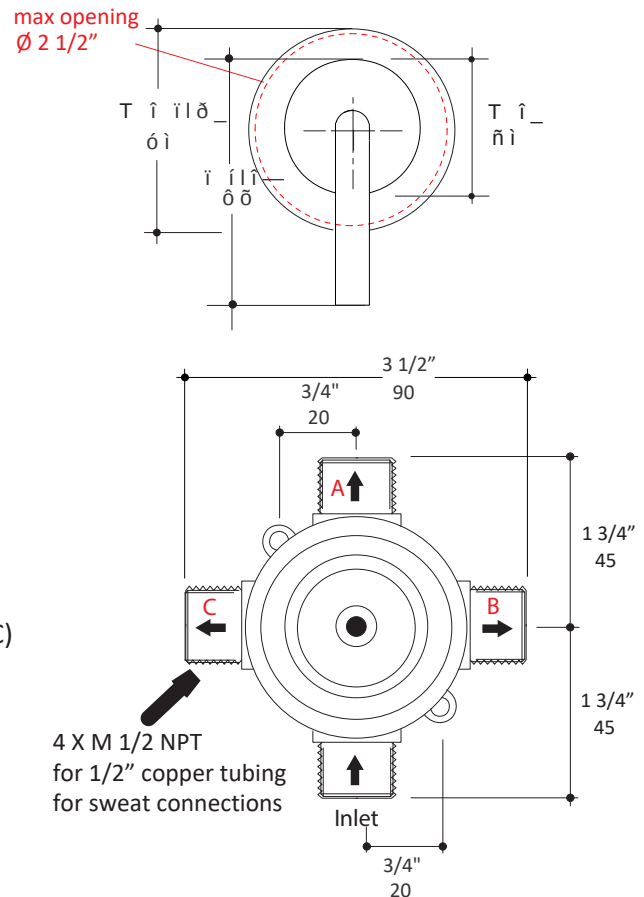


LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 08/26/2026


**IMPORTANT:** Assigning fixtures to outlets is at the client's discretion, all connections to selected outlets must be tested before the walls are closed and finished.

### HANDLE POSTION FOR OUTLETS


#### 2-WAY DIVERTER - NON-SHARING VD2 - 180° ROTATION

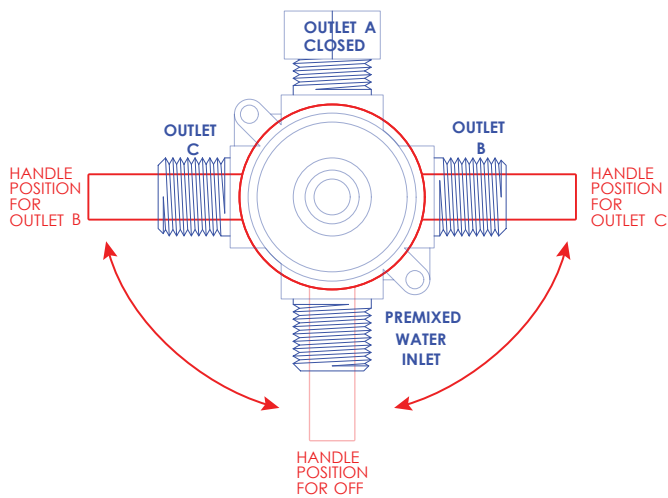

#### 3-WAY DIVERTER - NON-SHARING VD3 - 360° ROTATION

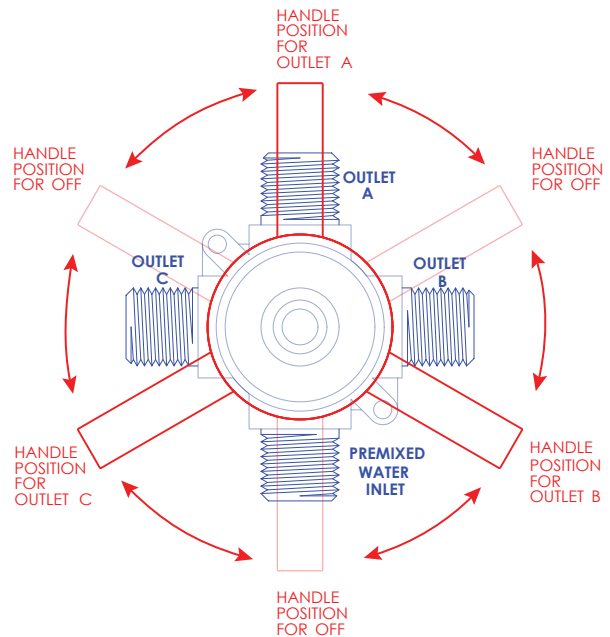

#### 2-WAY DIVERTER - SHARING VD2S - 360° ROTATION

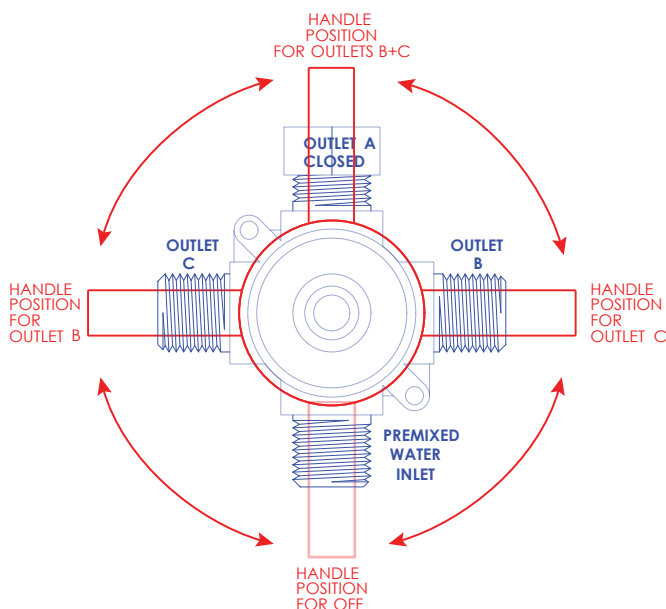

#### 3-WAY DIVERTER - SHARING VD3S - 360° ROTATION

