

Specifications:

Installation:	built-in wall mount	
Exterior Dimensions:	W: 5 1/8" H: 7 1/4" or 5" x 5"	
Material:	solid brass construction with ceramic disc cartridge	
Water use:	5.6 GPM (43.5 PSI)	
Finishes:	PS - polished brass PN - polished nickel 51 - brushed brass CR - polished chrome BG - brushed gold BK - black chrome PB - polished bronze GM - gun metal NI - brushed nickel TN - titanium BB - brushed bronze 44 - matte black	
Fittings included:	Rough-in # VPBP W: 5 1/8" H: 7 1/4" trim # 15PBP.X.S-A 5" x 5" trim # 15PBP.X.S1-A Ø 4"	
Tile opening max size:	Ø 4"	

Features:

- pressure balancing valve with universal rough-in VPBP
- trims sold separately rectangular backplate W: 5 1/8" x H: 7 1/4" or square 5" x 5"
- cross handle
- single ceramic progressive disc cartridge
- anti-scald protection & temperature regulation for flow rates as low as 1.75 GPM
- screwdriver service stops
- 1/2" Male NPT inlets & outlet, optional sweat connections
- 1" extension kit available

Codes + Standards:




- Meets and exceeds applicable national codes
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16
- CAL-Green compliant



compliant when installed to specific requirements of this regulation

Recommended Items:

- Replacement parts:
 - VPBP rough-in
 - 15PBP.X.S-A trim W: 5 1/8" H: 7 1/4"
 - 15PBP.X.S1-A trim 5" x 5"
 - VPBP-C ceramic cartridge
 - VPBP-EX 1" extension kit

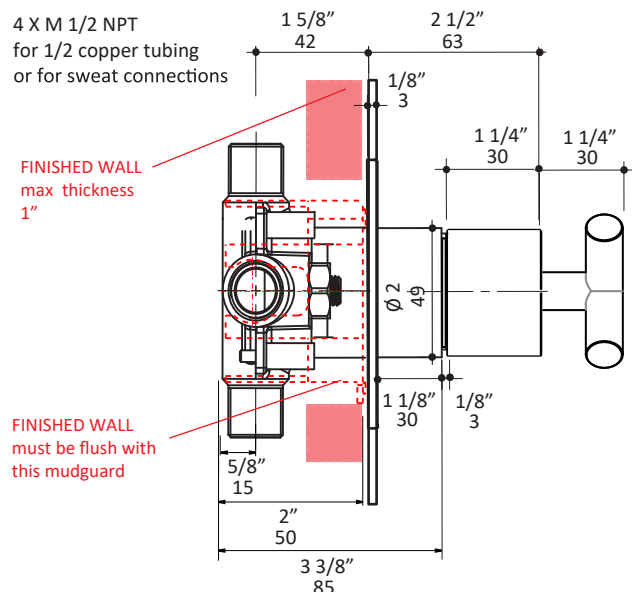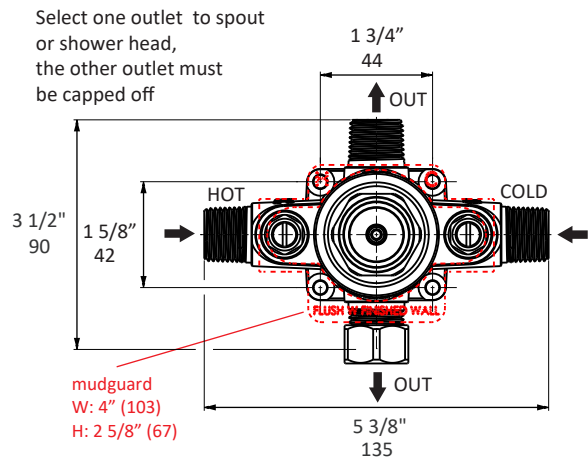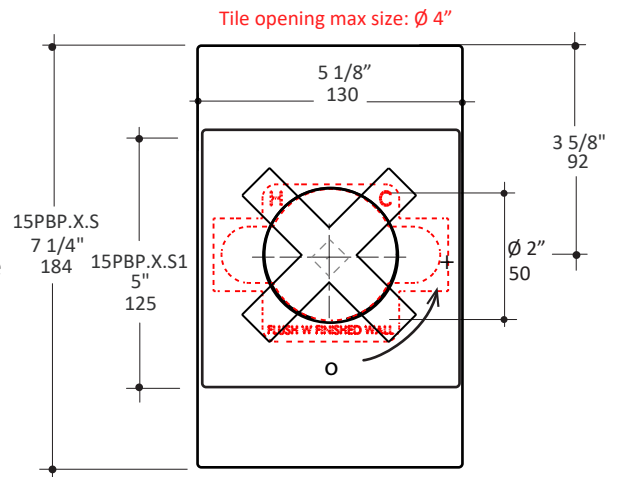

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 4/28/2026