

Specifications:

15BPB3.L.R, 15BPB3S.L.R

Installation:	built-in wall mount
Exterior Dimensions:	Ø 7 1/4"
Material:	solid brass construction with progressive ceramic cartridge and 3-way diverter cartridge
Water use:	4.2 GPM (43.5 PSI)
Finishes:	PS - polished brass 51 - brushed brass BG - brushed gold PB - polished bronze NI - brushed nickel BB - brushed bronze PN - polished nickel CR - polished chrome BK - black chrome GM - gun metal TN - titanium 44 - matte black
Fittings included:	15BPB3.L.R non-sharing diverter valve: # VPBP3 - rough-in with non-sharing diverter and trim # 15BPB1_2_2S_3_3S.L.R-A 15BPB3S.L.R sharing diverter valve: # VPBP3S - rough-in with sharing diverter and trim # 15BPB1_2_2S_3_3S.L.R-A
Tile opening max size:	W: 4" H: 5 3/4"



Features:

- unibody pressure balancing progressive valve with 3-way diverter and OFF function
- trim sold separately
- lever handles and round backplate
- non-sharing 3-way diverter valve with 360° rotating angle # VPBP3
- sharing 3-way diverter valve with 360° rotating angle # VPBP3S
- anti-scald protection & temperature regulation for flow rates as low as 1.75 GPM
- screwdriver service stops
- finished wall must be flush with mudguard as marked
- 1/2" Male NPT inlets & outlets, optional sweat connection
- 1" extension kit available

Codes + Standards:

- Meets and exceeds applicable national codes
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16
- CAL-Green compliant (non-sharing valves)



compliant when installed to specific requirements of this regulation




Recommended Items:

- Replacement parts:
 - VPBP-C ceramic cartridge
 - VD3-C- diverter cartridge, non-sharing
 - VD3S-C- diverter cartridge, sharing
 - VPBP3-EX 1" extension kit



LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 08/31/2026

NON-SHARING

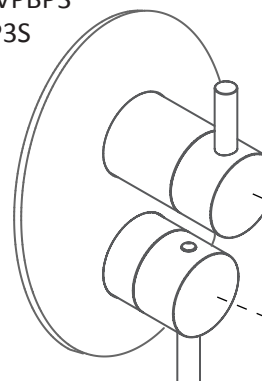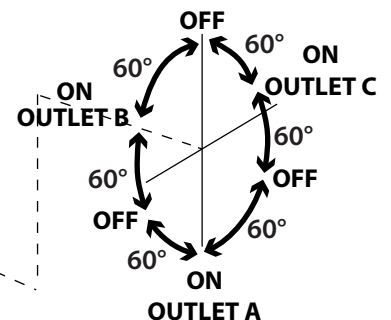

SHARING

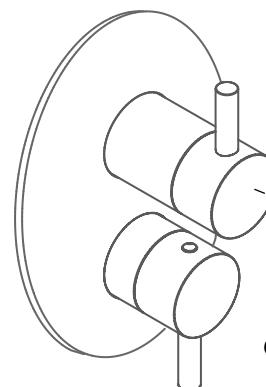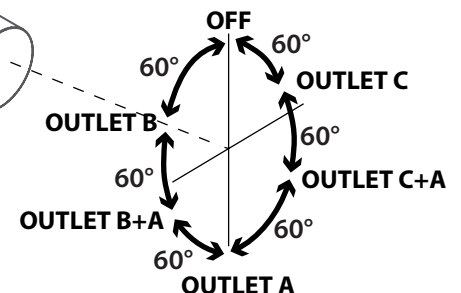


LACAVA

CIGNO

built-in pressure balanced progressive mixer
w/3-way diverter

15PBP3.L.R, 15PBP3S.L.R


NON-SHARING

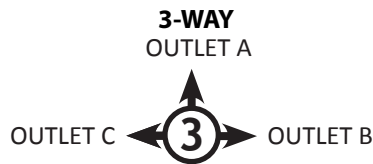



SHARING



Select outlet as indicated, the other outlets must be capped off

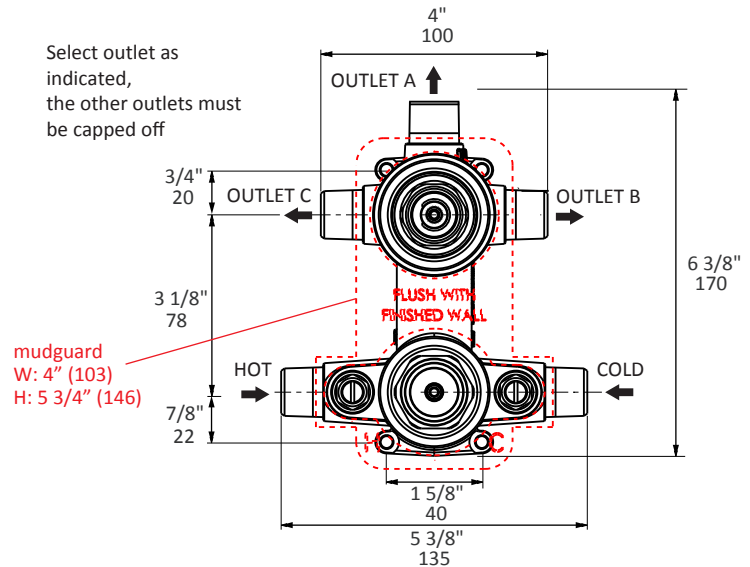

5 X M 1/2 NPT
for 1/2 copper tubing
or for sweat connections

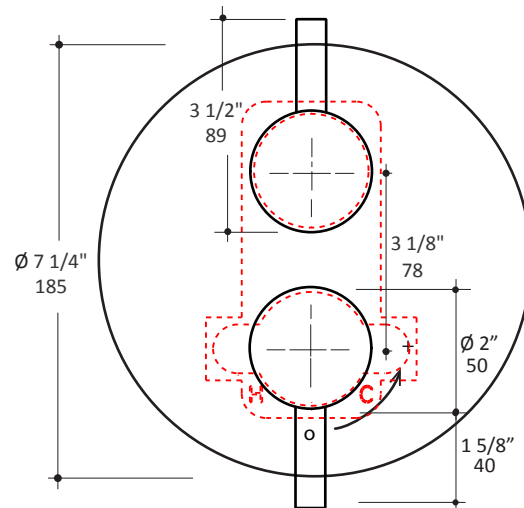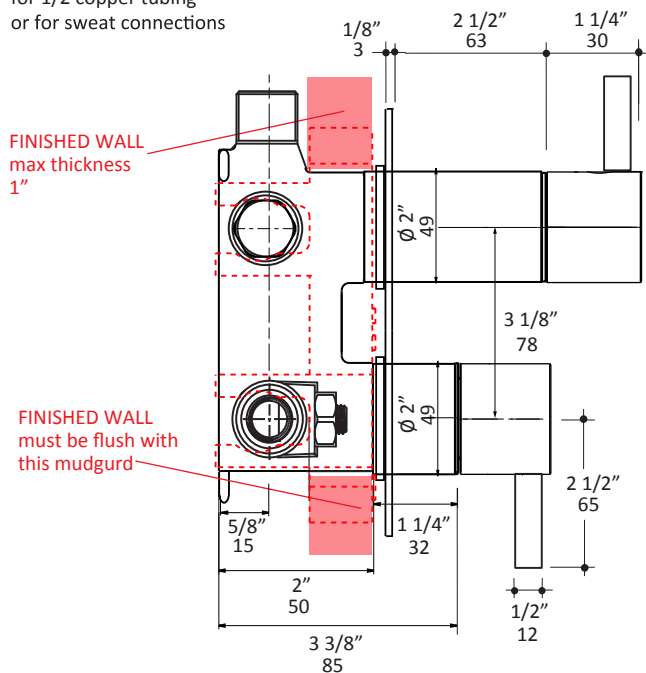

Tile opening max size: 4"W x 5 3/4"H

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.
Revised: 07/17/2024