

Specifications:

Installation:	built-in wall mount													
Exterior Dimensions:	Ø 7 1/4"													
Material:	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 2-way out													
Water use:	7.1 GPM (43.5 PSI)													
Finishes:	<table><tr><td>PS - polished brass</td><td>PN - polished nickel</td></tr><tr><td>51 - brushed brass</td><td>CR - polished chrome</td></tr><tr><td>BG - brushed gold</td><td>BK - black chrome</td></tr><tr><td>PB - polished bronze</td><td>GM - gun metal</td></tr><tr><td>NI - brushed nickel</td><td>TN - titanium</td></tr><tr><td>BB - brushed bronze</td><td>44 - matte black</td></tr></table>		PS - polished brass	PN - polished nickel	51 - brushed brass	CR - polished chrome	BG - brushed gold	BK - black chrome	PB - polished bronze	GM - gun metal	NI - brushed nickel	TN - titanium	BB - brushed bronze	44 - matte black
PS - polished brass	PN - polished nickel													
51 - brushed brass	CR - polished chrome													
BG - brushed gold	BK - black chrome													
PB - polished bronze	GM - gun metal													
NI - brushed nickel	TN - titanium													
BB - brushed bronze	44 - matte black													
Fittings included:	15TH2.C.R non-sharing diverter valve: # VTH2.1 - rough-in with non-sharing diverter and trim # 15TH1_2.C.R-A 15TH2S.C.R sharing diverter valve: # VTH2S - rough-in with sharing diverter and trim # 15TH2S_3_3S.C.R-A													
Tile opening max size:	W: 4 3/8" H: 5 3/4"													



Features:

- unibody thermostatic valve with 2-way diverter and OFF function
- lever handles and round backplate
- non-sharing 2-way diverter valve with 180° rotating angle # VTH2.1
- sharing 2-way diverter valve with 360° rotating angle # VTH2S
- 3/4" NPT water in and 1/2" OUT connections (outlet B and C)
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- separate check valves with filters for easy servicing
- finished wall must be flush with mudguard as marked
- 1 1/8" extension kit available

Codes + Standards:

- Meets and exceeds applicable national codes and standards
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16.
 - CAL-Green compliant (non-sharing valves)




compliant when installed to specific requirements of this regulation

Recommended Items:


- Replacement parts:
 - VD2-C- diverter cartridge, non-sharing
 - VD2S-C- diverter cartridge, sharing
 - R039 thermostatic cartridge
 - VTH1.1-EX 1 1/8" extension kit for non-sharing valve
 - VTH3.1-EX 1 1/8" extension kit for sharing valve

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary. Revised: 08/31/2026

NON-SHARING

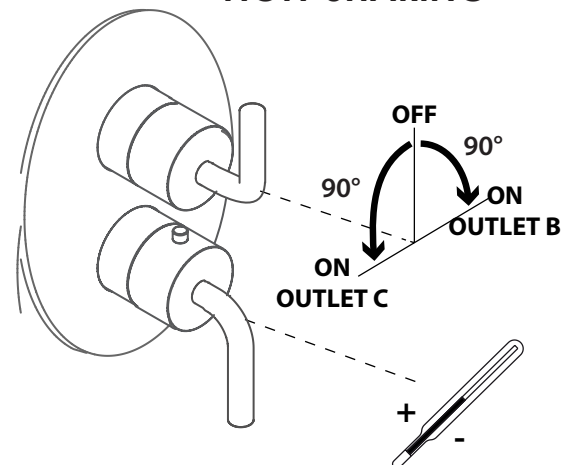

SHARING

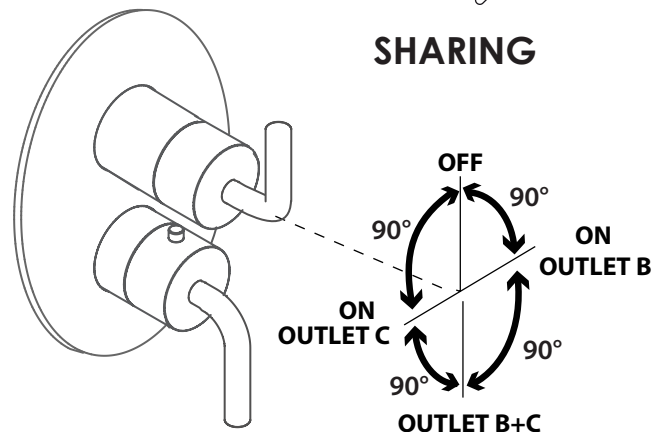












CIGNO
built-in thermostatic valve
with 2-way diverter
15TH2.C.R, 15TH2S.C.R

CIGNO

built-in thermostatic valve
with 2-way diverter

with 2-way diverter

15TH2.C.R, 15TH2S.C.R

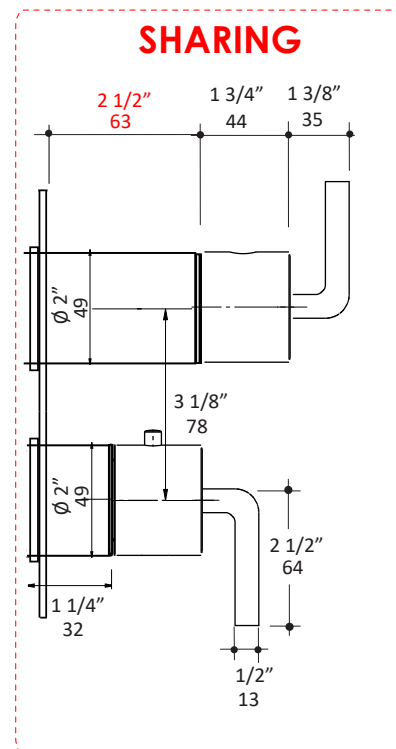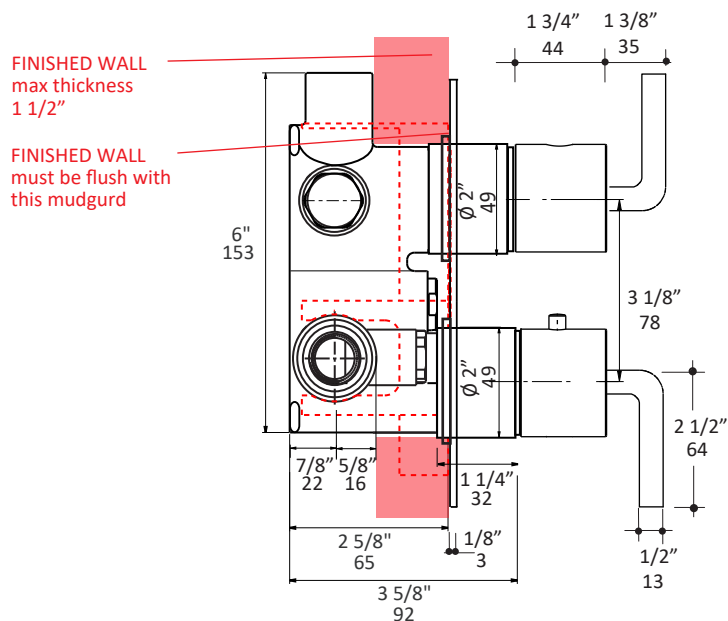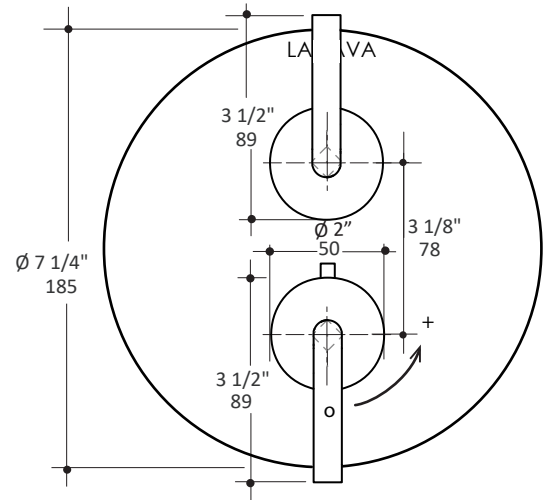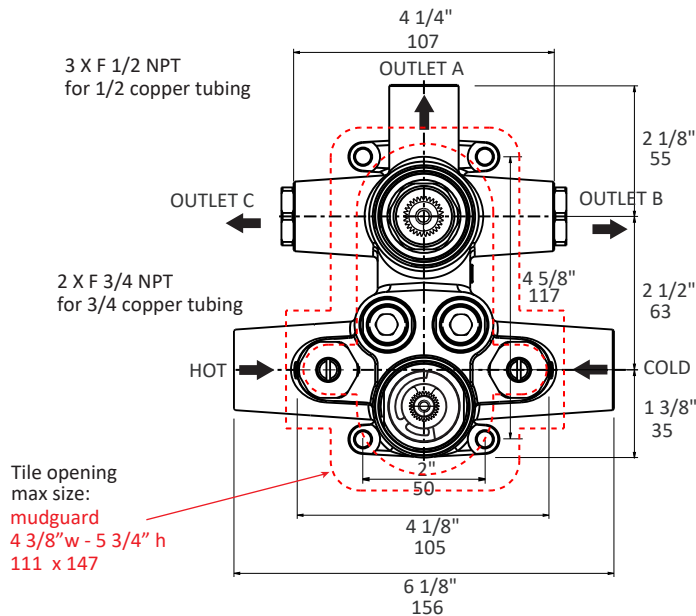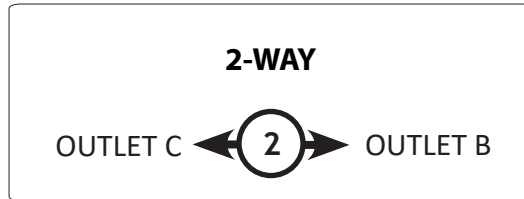

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.

Revised: 07/24/2024