

LACAVA

Specifications:

Installation:	built-in wall mount	
Exterior Dimensions:	7 1/4"	
Material:	solid brass construction with thermostatic cartridge and diverter ceramic cartridge with 2-way out	
Water use:	7.1 GPM (43.5 PSI)	
Finishes:	PS - polished brass PN - polished nickel 51 - brushed brass CR - polished chrome BG - brushed gold BK - black chrome PB - polished bronze GM - gun metal NI - brushed nickel TN - titanium BB - brushed bronze 44 - matte black	
Fittings included:	15TH2.C.S non-sharing diverter valve: # VTH2.1 - rough-in with non-sharing diverter and trim # 15TH1_2.C.S-A 15TH2S.C.S sharing diverter valve: # VTH2S - rough-in with sharing diverter and trim # 15TH2S_3_3S.C.S-A	

Tile opening max size: W: 4 3/8" H: 5 3/4"

CIGNO built-in thermostatic valve with 2-way diverter 15TH2.C.S, 15TH2S.C.S



Features:

- unibody thermostatic valve with 2-way diverter and OFF function
- lever handles and rectangular backplate
- non-sharing 2-way diverter valve with 180° rotating angle # VTH2.1
- sharing 2-way diverter valve with 360° rotating angle # VTH2S
- 3/4" NPT water in and 1/2" OUT connections (outlet B and C)
- anti-scald protection & temperature regulation
- water temperature set to 100°F
- screwdriver service stops
- separate check valves with filters for easy servicing
- finished wall must be flush with mudguard as marked
- 1 1/8" extension kit available

Codes + Standards:

- Meets and exceeds applicable national codes and standards
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16.
 - CAL-Green compliant (non-sharing valves)




compliant when installed to specific requirements of this regulation

Recommended Items:


- Replacement parts:
 - VD2-C- diverter cartridge, non-sharing
 - VD2S-C- diverter cartridge, sharing
 - R039 thermostatic cartridge
 - VTH1.1-EX 1 1/8" extension kit for non-sharing valve
 - VTH3.1-EX 1 1/8" extension kit for sharing valve

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.
Revised: 08/31/2026

NON-SHARING

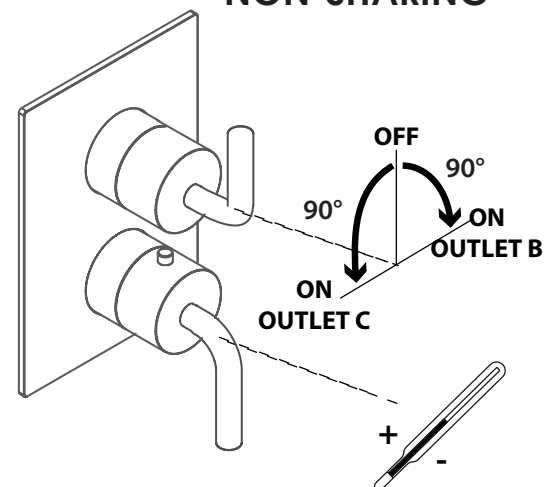

SHARING

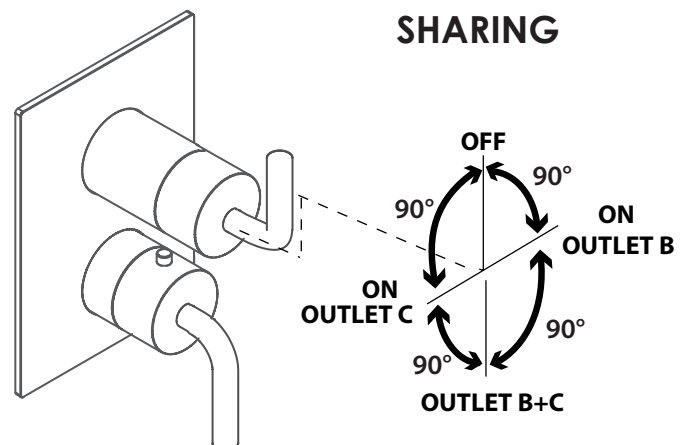



LACAVA

CIGNO


built-in thermostatic valve
with 2-way diverter

15TH2.C.S, 15TH2S.C.S


2-WAY

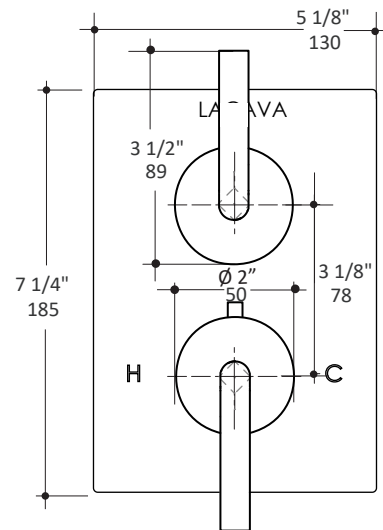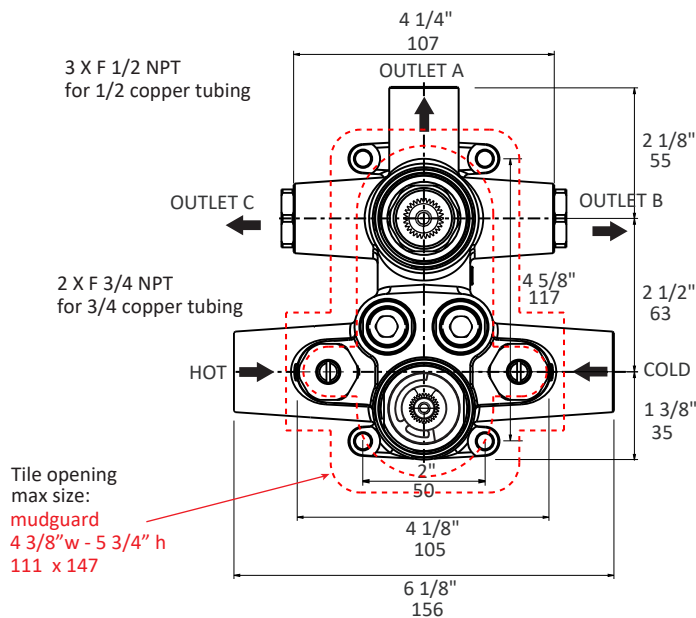

NON-SHARING

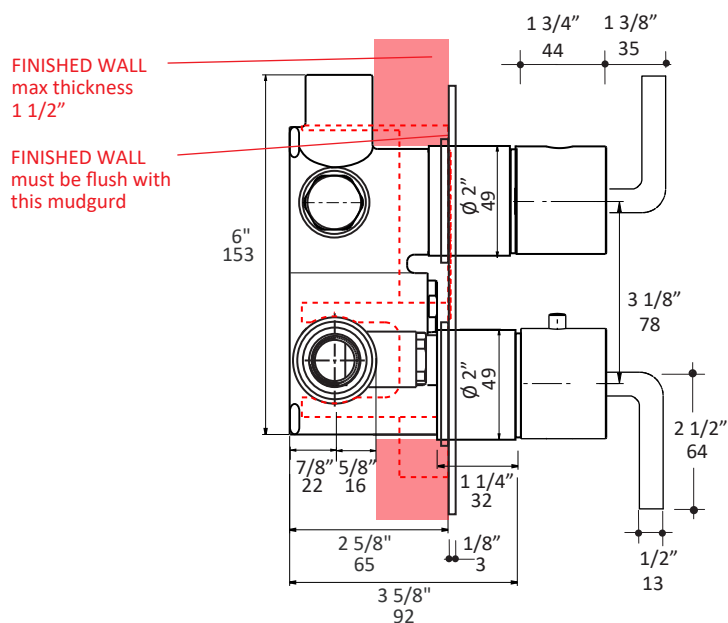

SHARING

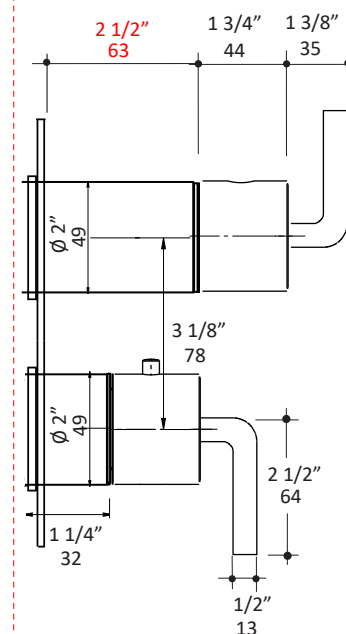

LACAVA reserves the right to revise any dimension or information on this sheet without notice. Dimensions are nominal and may vary within an industry accepted tolerance of 1/4". Drawings provided herein are meant to give the user an idea of the product and are not made to scale. Location of plumbing is meant for reference, your specific application may vary.
Revised: 07/24/2024