

Specifications:

Installation:	built-in wall mount
Exterior Dimensions:	W: 5 1/8" H: 7 1/4" or Ø 5"
Material:	solid brass construction with ceramic disc cartridge
Water use:	5.6 GPM (43.5 PSI)
Finishes:	CR - polished chrome NI - brushed nickel BB - brushed bronze BK - black chrome TN - titanium
Fittings included:	44 - matte black Rough-in # VPBP W: 5 1/8" H: 7 1/4" trim # 41PBP.L.O-A Ø 5" trim # 41PBP.L.O1-A
Tile opening max size:	Ø 4"

Features:

- pressure balancing valve with universal rough-in VPBP
- trims sold separately oblong backplate
W: 5 1/8" x H: 7 1/4" or round Ø 5"
- lever handle
- single ceramic progressive disc cartridge
- anti-scald protection & temperature regulation
for flow rates as low as 1.75 GPM
- screwdriver service stops
- 1/2" Male NPT inlets & outlet, optional sweat connections
- 1" extension kit available

Codes + Standards:


- Meets and exceeds applicable national codes
 - ASME A112.18.1/CSA B125.1
 - ASSE 1016/ASME A112.1016/CSA B125.16
- CAL-Green compliant



compliant when installed to specific requirements of this regulation

Recommended Items:

- Replacement parts:
 - VPBP rough-in
 - 41PBP.L.O-A trim W: 5 1/8" H: 7 1/4"
 - 41PBP.L.O1-A trim Ø 5"
 - VPBP-C ceramic cartridge
 - VPBP-EX 1" extension kit

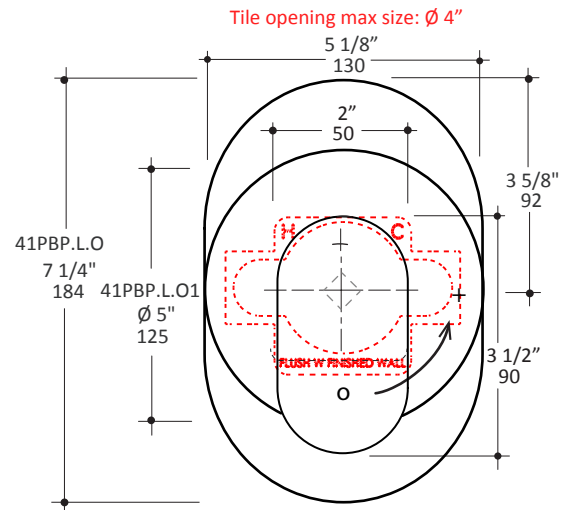

Select one outlet to spout or shower head, the other outlet must be capped off

