



## Designer Collection Shower Bases

### MTSB-6332BF

62.5" x 32" x 1.75" (exterior bottom of base)
BARRIER-FREE THRESHOLD textured floor
Center Drain
Acrylic CXL®
115 lbs / 52 kg

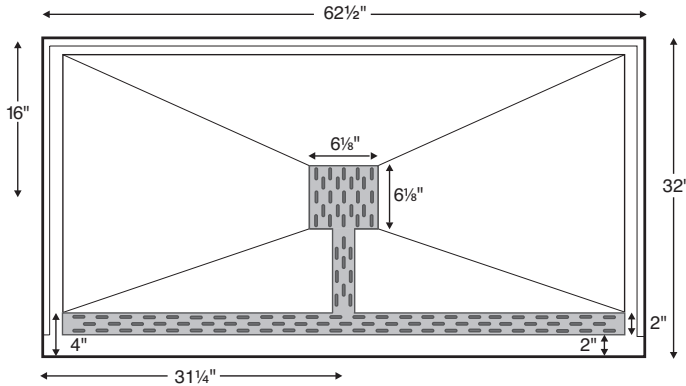

Designed to be recessed into floor, to create a flat transfer surface.

Model #	Package Content	Size	Shape	MSRP
SB6332BF	Natural stainless steel drain and channel cover, PVC drain kit	62.5" x 32" x 1.75"	Rectangle	<b>\$2,435</b>

#### Options *Must be ordered at time of purchase*

**Color** Please specify color on order  
White (CWH)  
Biscuit (CBS)

#### Quick Ship (QSPRI) \$430

Reduces lead time. Please call for availability.

**Radiance® (RAD100) \$1,595** Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.

#### Pre-Leveled Foam Base (PLFSB) \$220

**Drain & Channel Cover** Natural stainless steel drain & channel installed on base as standard. Substitute with the following available options:  
Powder Coated White Stainless Steel Hidden Drain Cover (DCT60W) Must specify part code on order; comes in lieu of standard cover.

#### Accessories

##### Drain Kit Options

Solid Brass Drain Kit with Stainless Steel Cover (SBDKSB) **\$195**

##### Teak Shower Seat

###### Premium

Natural Stainless (TK-SSEAT2416BNS) **\$3,035**

High-Polished Stainless (TK-SSEAT2416BHP) **\$3,465**

###### Premium ADA

Natural Stainless (TK-SSEAT2416BNSA) **\$3,630**

High-Polished Stainless (TK-SSEAT2416BHPA) **\$4,155**

###### Standard

Natural Stainless (TK-SSEAT2215NS) **\$1,125**

High-Polished Stainless (TK-SSEAT2215HP) **\$1,575**

#### IMPORTANT ORDERING & INSTALLATION INFORMATION

- Zero-barrier single front threshold designed for ease of transfer between bathroom and shower area.
- 3-sided integral tile flange to facilitate installation.
- 3.5" drain opening pre-drilled.
- Drain finish options on this sheet are upcharge prices only. Contact MTI for ordering details for drain kits sold separately.
- Compliant with ASTM C 1028-07 coefficient of friction test.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Leveled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.

- Options and accessories may be packaged inside the box. Always check packaging before discarding.
- All product measurements are  $\pm 1/2"$ .
- Specifications and configurations are subject to change without notice.
- Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.

MTI's Customer Service: Monday-Friday 8am-6pm EST

**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-6332BF

©2023 by MTI Baths, Inc. Modification Rights Reserved



Rev. 02 07 2023