



6642MT

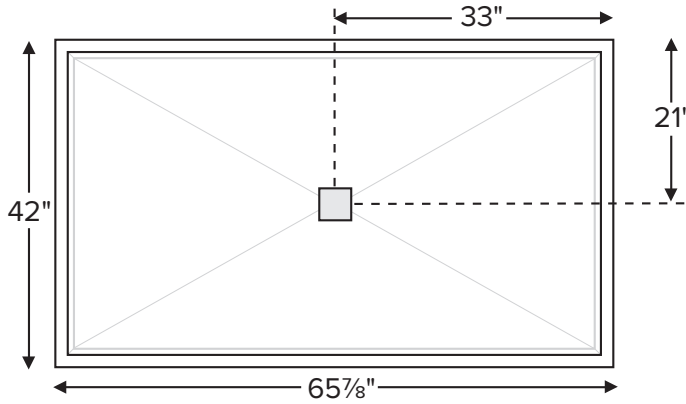

When ordering, please specify tile flange locations.

65.875" x 42" x 3" (exterior bottom of base)	
MULTIPLE, LOW-PROFILE THRESHOLD smooth floor	
Center Drain	
<b>Acrylic CXL®</b>	<b>DoloMatte®</b>
150 lbs / 68 kg	169 lbs / 77 kg



Model #	Material	Color / Finish	MSRP
SB6642MT	Acrylic CXL®	White (CWH) or Biscuit (CBS) / Gloss	<b>\$2,120</b>
SBDM6642MT	DoloMatte®	White (CWH) / Matte	<b>\$2,490</b>

Must specify color code on order. DoloMatte available in white only. Not for use in steam shower applications.

Options <i>Must be ordered at time of purchase</i>
<b>Quick Ship (QSPRI) \$450</b> Reduces lead time. Please call for availability.
<b>Radiance® (RAD100) \$1,675</b> Shower floor heating system. Radiance heating grids are fully integrated within the acrylic shell structure of the shower floor. Requires a 110-volt, 15 amp GFCI and remote installation of control box & keypad.
<b>Pre-Levelled Foam Base (PLFSB) \$230</b>
<b>PVC Drain Kit Finishes</b> Chrome included with shower base Brushed Nickel upcharge (SBSQDBN) <b>\$130</b>

Accessories
<b>Drain Kit</b> Solid Brass Drain Kit with Stainless Steel Trim (SBSQDSB) <b>\$205</b>
<b>Teak Shower Seat</b> Premium Natural Stainless (TK-SSEAT2416BNS) <b>\$3,125</b> High-Polished Stainless (TK-SSEAT2416BHP) <b>\$3,570</b> Standard Natural Stainless (TK-SSEAT2215NS) <b>\$1,160</b> High-Polished Stainless (TK-SSEAT2215HP) <b>\$1,620</b>
<b>Teak Bath Mat (TKMAT3018) \$840</b> Measures 30" x 17.5" x 1" Custom sizes also available. Contact MTI for details.
<b>Teak Shower Tray (TK6642MT) <b>Contact MTI for pricing</b></b>



Factory-installed tile flange is 1/16" thick.  
Account for this thickness when planning final opening size.

**IMPORTANT ORDERING & INSTALLATION INFORMATION**

- Factory-installed tile flange on 1, 2 or 3 sides to facilitate installation. Must specify tile flange location(s) on order.
- 3.5" drain opening pre-drilled.
- Dimensions provided represent the length and width of the bottom of the base without tile flange. See Installation Instructions.
- Add proper wet-bedding compound to fully support bottom of shower base. Optional factory installed Pre-Levelled Foam Base negates the need to wet bed when installing on a flat, level subfloor. See installation instructions.
- All bases are in accordance with CSA B45.5/IAPMO Z124 standard and compliant with ASTM C 1028-07 coefficient of friction. DoloMatte bases meet ANSI A137.1/A326.3 coefficient of friction and AS HB198:2014 pendulum slip resistance testing.

• Options and accessories may be packaged inside the box. Always check packaging before discarding.  
• All product measurements are ±1/2".  
• Specifications and configurations are subject to change without notice.  
• Measurements herein supersede all others published prior to publication date below.

See the Installation & Operation Manual for more details.  
MTI's Customer Service: Monday-Friday 8am-6pm EST  
**800-783-8827** or [service@mtibaths.com](mailto:service@mtibaths.com)

CSA # MTSB-6642MT  
HURL # MTSB-DM6642MT

©2024 by MTI Baths, Inc. Modification Rights Reserved

