

NEWPORT BATH

BP ROUGH VALVE

Features

Solid brass construction
Provides anti-scald protection and temperature regulation
Pressure-balance technology maintains water temp within +/- 2 degrees Fahrenheit
High-temperature safety stop ensures water temperature stays below max setting
Hot and cold inlet stops ensure easy cartridge access
Integral pull-style diverter with automatic reset
1-1/16" functional depth (center-back) enables back-to-back installation
Maximum handle rotational requirement of 150 degrees to achieve max temp setting
Requires Newport Brass BP Valve Trim (sold-separately)


1-685



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:


ASME A112.18.1/CSA B125.1-18
IAPMO/cUPC
IPC
ASSE 1016/ASME A112.1016
All applicable US Federal and State material regulations

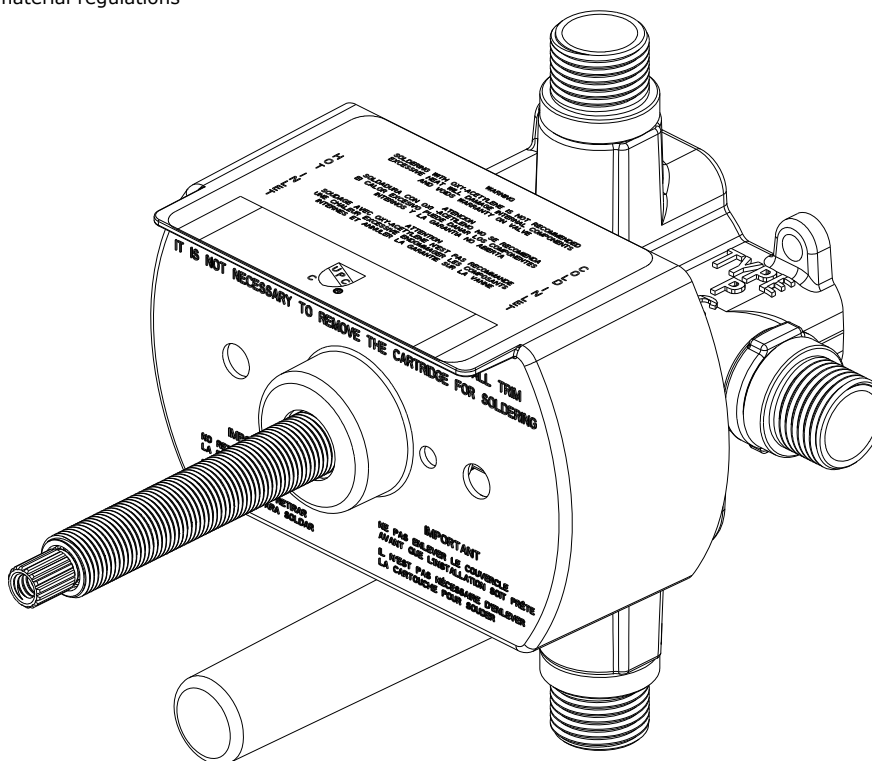

1-685

PRODUCT DIMENSIONS (Units are in inches)

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

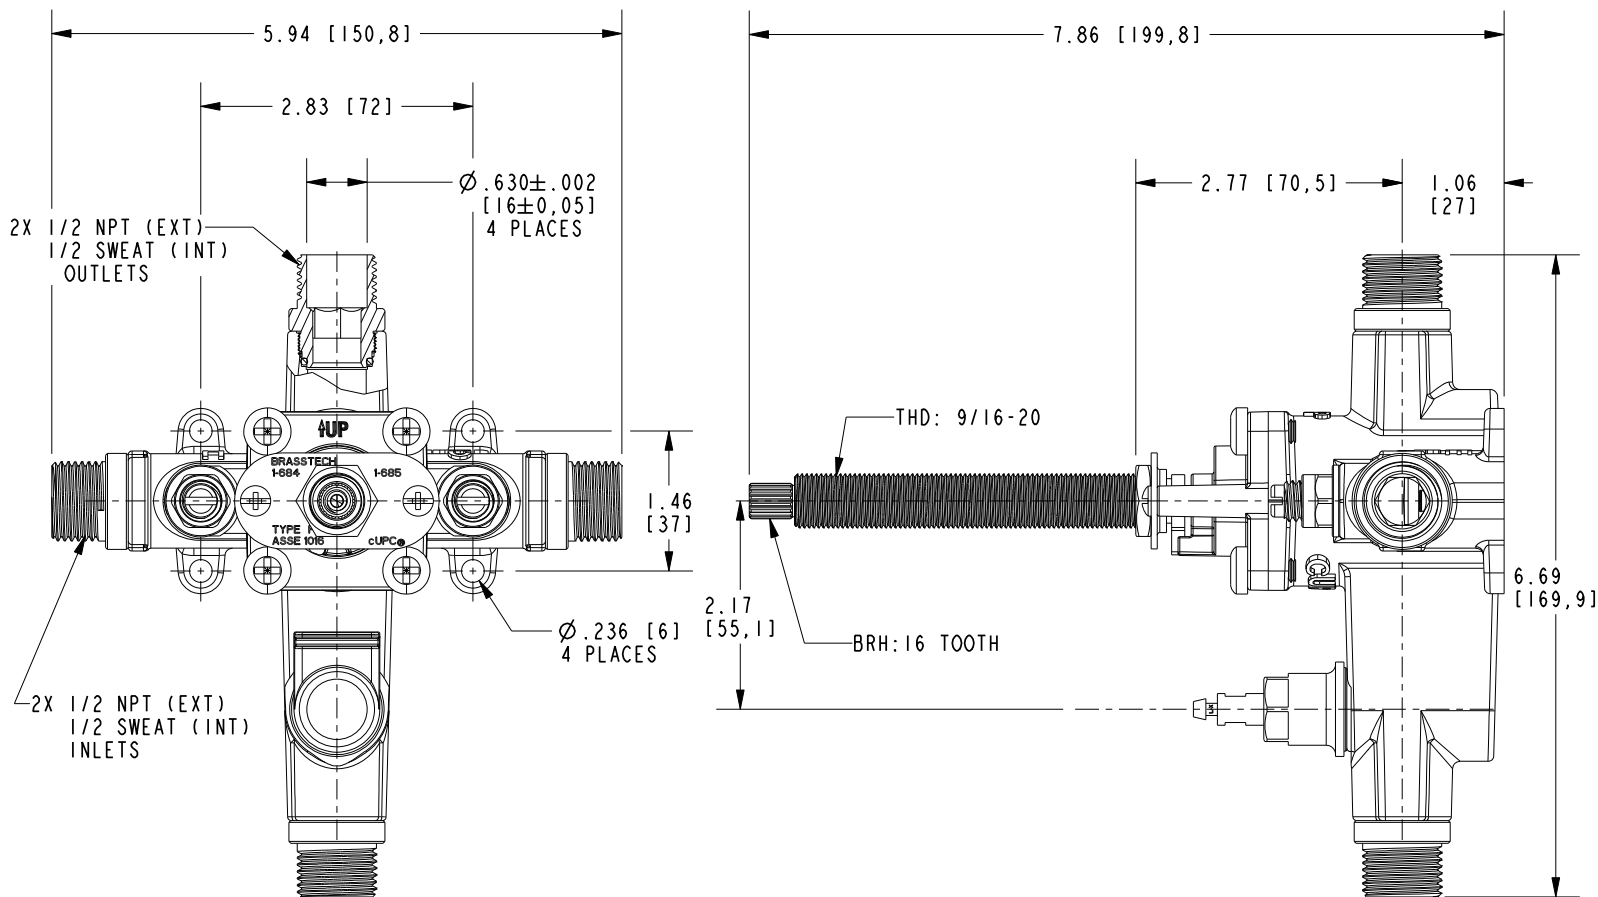

(MUD COVER HIDDEN IN ALL VIEWS)

BP ROUGH VALVE

1-685

Page 2 of 2

EN- 5038

REV H

NEWPORT BRASS
Flawless Beauty. From Faucet to Finish.

t: 949.417.5207 | www.newportbrass.com
©2025 NewportBrass