SLATER

3-2921

Features

- Solid brass construction
- 3-spoke handles
- 8-11/16" (22.1 cm) spout reach (wall-to-center)
- 1/2" NPT spout inlet fitting
- Intended for use with Newport Brass rough valve as specified (Required Accessory)
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges
- 1.2 gallons (4.5 liters) per minute maximum flow rate

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- NSF 61
- NSF 372
- IPC
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- EPA Watersense
- California Energy Commission (CEC)
- All applicable US Federal and State material regulations

Colors / Finishes • 10B: Oil Rubbed Bronze

- 15: Polished Nickel
- 15S: Satin Nickel PVD
- Polished Chrome • 26:
- Other: Refer to the Newport Brass catalog for additional color/finish options.

Specified Model

Model	Description	Colors Finishes
3-2921	Wall-Mounted Lavatory Faucet	□ 10B □ 15 □ 15S □ 26 □ Other

Required Accessory: Trim, above, and Rough Valve Kit, below, must both be specified

Application	Wall Lavatory Valve
Description	2-Cartridge Assembly
Inlet/Outlet	1/2"
Part Number	1-532
Image	

Product Specification: Add "Color / Finish" suffix to Model number, below.

The Wall-Mounted Lavatory Faucet shall be made of solid brass construction. Wall-Mounted Lavatory Faucet shall incorporate 3-spoke handles and a 8-11/16" (22.1 cm) spout (wall-to-center) that incorporates a 1/2" NPT inlet fitting. Rough valve shall incorporate a brass valve body assembly and quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.2 gallon (4.5 liter) per minute maximum flow rate. Wall-Mounted Lavatory Faucet shall be Newport Brass Model 3-2921/ and Newport Brass rough valve shall be 1-532.






3-2921

PRODUCT DIMENSIONS (Units are in inches)



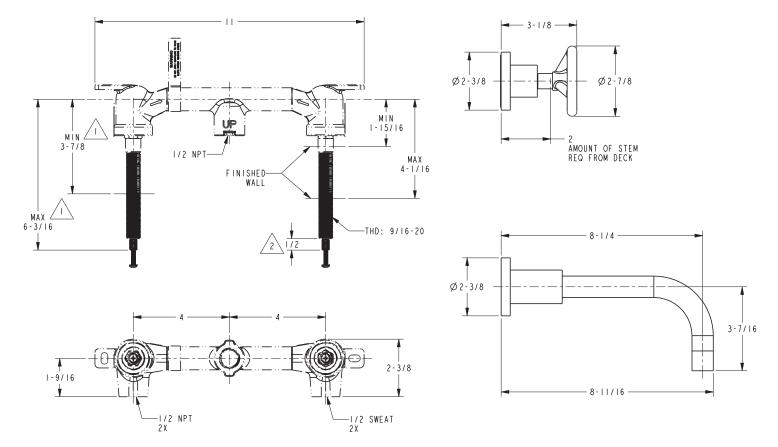

Slater Wall-Mounted Lavatory Faucet **3-2921**



t: 949.417.5207 | www.newportbrass.com ©2016 Brasstech, Inc.

Page 2 of 2 Spec_3-2921