

SKYLAR

3-2991

Features

- Solid brass construction
- ADA compliant contemporary cross handles
- 8-5/16" (22.7 cm) spout reach (wall-to-center)
- 1/2" NPT spout inlet fitting
- Intended for use with Newport Brass rough valve as specified (Required Accessory)
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges
- 1.2 gallons (4.5 liters) per minute maximum flow rate

Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- NSF 61
- NSF 372
- IPC


3-2991

- ADA (Handle Only)
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- EPA Watersense
- California Energy Commission (CEC)
- All applicable US Federal and State material regulations

Wall-Mounted Lavatory Faucet

Colors / Finishes

10B: Oil Rubbed Bronze
15: Polished Nickel
15S: Satin Nickel - PVD
26: Polished Chrome

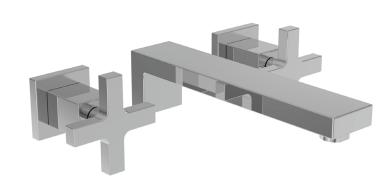

10B 15 15S

Wall-Mounted Lavatory Faucet

15S: Satin Nickel - PVD 26: Polished Chrome Other: Refer to the Newport Brass catalog for additional color/finish options. Specified Model Model Description Colors | Finishes

Required Accessory: Trim, above, and Rough Valve Kit, below, must both be specified	
Application	Wall Lavatory Valve
Description	2-Cartridge Assembly
Inlet/Outlet	1/2"
Part Number	1-532
Image	

Product Specification: Add "Color / Finish" suffix to Model number, below.

The Wall-Mounted Lavatory Faucet shall be made of solid brass construction. Wall-Mounted Lavatory Faucet shall incorporate ADA compliant cross handles and a 8-5/16" (21.1 cm) spout (wall-to-center) that incorporates a 1/2" NPT inlet fitting. Rough valve shall incorporate a brass valve body assembly and quarter-turn washerless ceramic disc valve cartridges. Faucet shall have a 1.2 gallon (4.5 liter) per minute maximum flow rate. Wall-Mounted Lavatory Faucet shall be Newport Brass Model 3-2991/____ and Newport Brass rough valve shall be 1-532.

26

Other

3-2991

PRODUCT DIMENSIONS (Units are in inches)



I. CUT STEM AS SHOWN.

CUT ALL THREADS 1/2" SHORTER THAN STEM.

