TOTO MS854114S(G) / MS853113S(G) UltraMax One Piece Toilet, 1.6 GPF



MS854114S(G) / MS853113S(G) - UltraMax Toilet with SoftClose Seat



G-Max Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose seat, or upgrade to a TOTO washlet.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Sleek, high profile one piece design
- G-Max Technology
- Powerful, quiet flush every time
- Wide, 2¹/₈" computer designed trapway
- Large water surface
- SanaGloss Technology: super smooth, ion barrier glazing for a clean toilet bowl

High profile one piece toilet. Low consumption (1.6Gpf/6Lpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose seat included.

■ MS854114S

Elongated with SoftClose seat. Available Colors: #01, #03, #11, #12

■ MS854114SG

Elongated with SoftClose seat. SanaGloss Glazing. Available Colors: #01

■ MS853113S

Round with SoftClose seat. Available Colors: #01, #03, #11, #12

■ MS853113SG

Round with SoftClose seat. SanaGloss Glazing. Available Colors: #01

□ SS113

SoftClose: Round Seat and lid.

□ SS114

SoftClose: Elongated Seat and lid.

Standard #01 Cotton, #11 Colonial White #12 Sedona Beige, #03 Bone

Trip Lever:

Standard #CP Chrome Plated Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

MS854114S(G) / MS853113S(G) UltraMax One Piece Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO G-Max System offers outstanding commercial grade performance. The TOTO low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0Lpf

Flush System: Gravity Feed

(G-Max System)

Min. Water Pressure:

8 psi (Static)

Water Surface: $10^{1}/_{4}$ " x $8^{1}/_{4}$ "

Trap Dia.: 2¹/₈" Rough-in: 12" Trap Seal: 2⁵/₈"

Warranty: One Year Limited Warranty

Material: Vitreous China

Shipping Weight: MS854114S(G) / MS853113S(G)

89 lbs. (Includes SoftClose Seat)

Shipping Dimensions:

MS854114S(G) / MS853113S(G)

303/4"L x 181/8"W x 271/8"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

These dimensions and specifications are subject to change without notice.

U.S. Patent: D379.496 D406.329

5.918.325 5.983.413

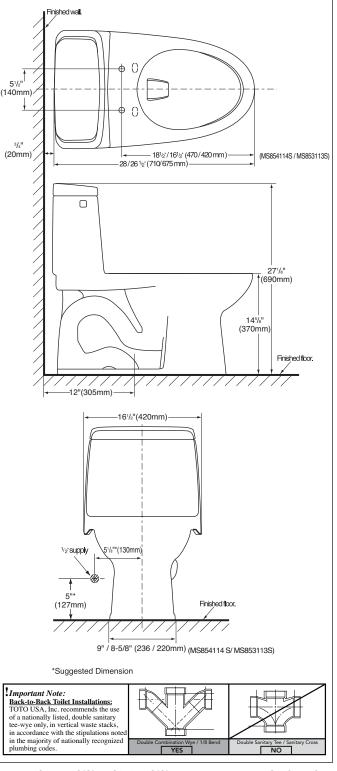

MS854114S(G) / MS853113S(G) - UltraMax Toilet with SoftClose Seat



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO LTD. 08/03 #A10090