TOTO®

Aquia® IV WASHLET®+ S2
Two-Piece Toilet - 1.28 & 0.9 GPF

FEATURES

- Concealed supply connection for seamless installation
- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 & 0.9 GPF (4.8 & 3.4 LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- Completely skirted design for a sleek and understated look that's easier to clean
- UNIVERSAL HEIGHT
- Chrome push-button
- 12" Rough-in
- Elongated front bowl toilet and tank with WASHLET+ S2 set
- EWATER+® auto-cleans wand after every use
- PREMIST® automatically mists the bowl before each use
- Self-cleaning wand cleans itself inside and out before and after every use
- CLEAN RESIN® keeps wand and seat cleaner, more hygienic, and effortless to maintain
- Convenient arm control panel
- Night light illuminates the inside of the bowl

DYNAMAX TORNADO FLUSH

CEFIONTECT

EWATER+

UNIVERSAL HEIGHT

MODELS

- **MW4463346CEMFGNA (#01)**
  With CEFIONTECT ceramic glaze, WASHLET+ S2 with contemporary design
    - **CT446CEFGNT40**
      Elongated bowl with CEFIONTECT
    - **ST446EMNA**
      Tank and cover only
    - **SW3346**
      WASHLET+ S2
    - **9AU321-A**
      WASHLET Adaptor

OPTIONAL COMPONENTS

- **TSU48.10**
  10" Unifit Rough-In
- **TSU48.14**
  14" Unifit Rough-In
- **THU842(#01, #BN, #PN, #MBL)-A**
  Push Button Assembly - Cotton, Brushed Nickel, Polished Nickel, Matte Black

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.9 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, UNIVERSAL HEIGHT, complete skirted bowl and chrome push button. Toilet shall be TOTO Model MW4463346CEMFGN#01.

See SW3346 Specification Sheet for details on included WASHLET.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements

MW4463346CEMFGN

SPECIFICATIONS

Water Use	1.28 GPF / 0.9 GPF (4.8 LPF / 3.4 LPF)
Flush System	DYNAMAX TORNADO FLUSH®
Min. Water Pressure	8 psi (Flowing)
Water Surface	7" x 5"
Trap Diameter	2-1/4"
Rough-in	12" (10" and 14" options available)
Trap Seal	2-1/8"
Warranty	One Year Limited Warranty
Material	Vitreous China
Shipping Weight	**CT446CEFGNT40:** 83 lbs **ST446EMNA:** 29 lbs **SW3346:** 16 lbs
Shipping Dimensions	**CT446CEFGNT40** 29-5/8" L x 16-3/8" W x 19-3/4" H **ST446EMNA** 17-1/4" L x 7-7/8" W x 17-1/2" H **SW3346** 24-3/8" L x 21" W x 7-7/16" H

See SW3346 Specification Sheet for details on included WASHLET.

INSTALLATION NOTES
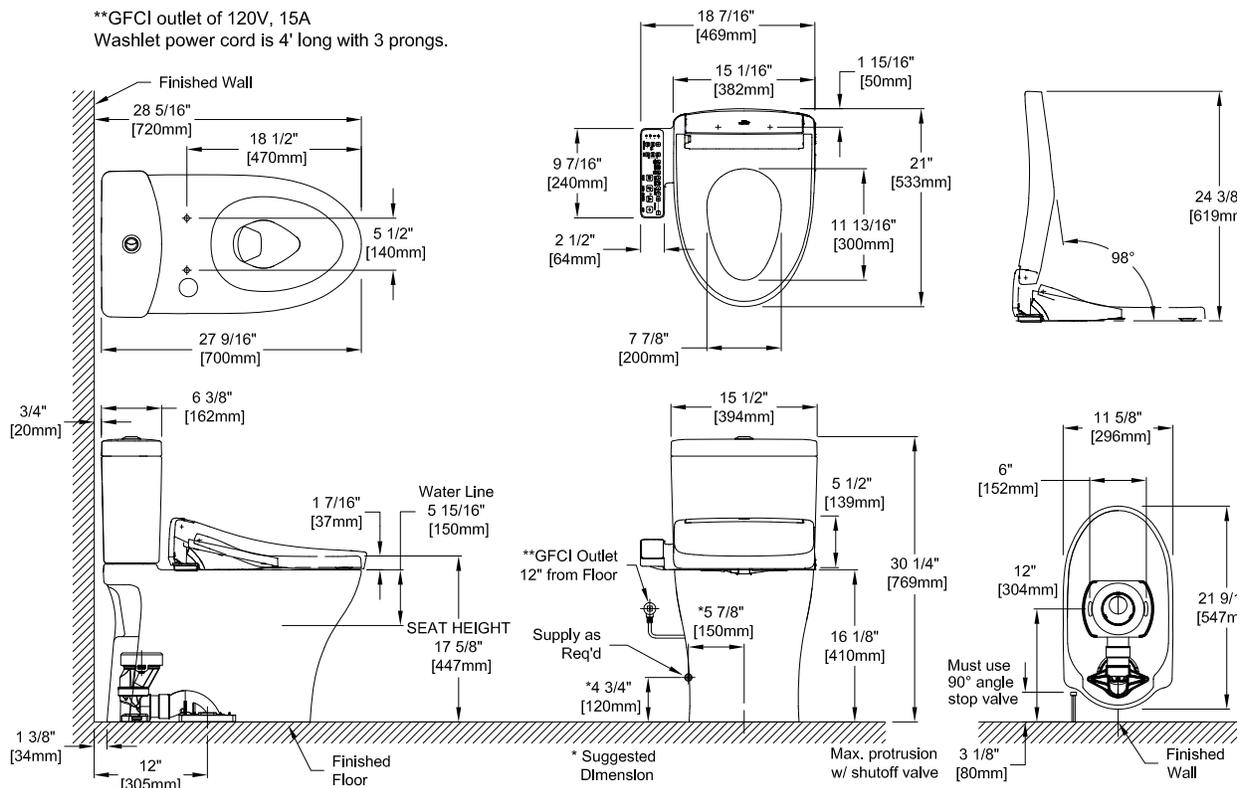
Back-to-Back Toilet Installations:
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

Double Combination Wye / 1/8 Bend	Double Sanitary Tee / Sanitary Cross
YES	NO
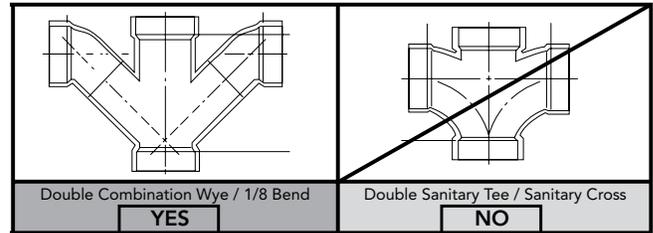
To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

DIMENSIONS

**GFCI outlet of 120V, 15A
Washlet power cord is 4' long with 3 prongs.